


OIL FLOW STUDIES at **LOW TEMPERATURES** in **MODERN ENGINES**



HAL SHAUB
EDITOR

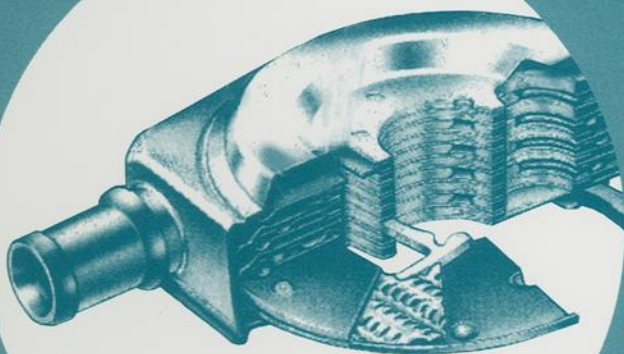

STP 1388

STP 1388

Oil Flow Studies at Low Temperatures in Modern Engines

Hal Shaub, editor

ASTM Stock Number: STP1388



ASTM
100 Barr Harbor Drive
PO Box C700
West Conshohocken, PA 19428-2959

Printed in the U. S. A.

Library of Congress Cataloging-in-Publication Data

Oil flow studies at low temperatures in modern engines / Hal Shaub, editor.

p. cm.—(STP; 1388)

“ASTM Stock Number: STP1388.”

Proceedings of a symposium held June 21, 1999, in St. Louis, Missouri.

Includes bibliographical references.

ISBN 0-8031-2857-6

1. Internal combustion engines—Lubrication—Congresses. 2. Lubrication and lubricants—Congresses. I. Shaub, Hal, 1935- II. American Society for Testing and Materials. III. ASTM special technical publication; 1388.

TJ789.O355 2000

621.43—dc21

00-044157

Copyright © 2000 AMERICAN SOCIETY FOR TESTING AND MATERIALS, West Conshohocken, PA. All rights reserved. This material may not be reproduced or copied, in whole or in part, in any printed, mechanical, electronic, film, or other distribution and storage media, without the written consent of the publisher.

Photocopy Rights

Authorization to photocopy items for internal, personal, or educational classroom use, or the internal, personal, or educational classroom use of specific clients, is granted by the American Society for Testing and Materials (ASTM) provided that the appropriate fee is paid to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923; Tel: 978-750-8400; online: <http://www.copyright.com/>.

Peer Review Policy

Each paper published in this volume was evaluated by two peer reviewers and at least one editor. The authors addressed all of the reviewers' comments to the satisfaction of both the technical editor(s) and the ASTM Committee on Publications.

To make technical information available as quickly as possible, the peer-reviewed papers in this publication were prepared “camera-ready” as submitted by the authors.

The quality of the papers in this publication reflects not only the obvious efforts of the authors and the technical editor(s), but also the work of the peer reviewers. In keeping with long-standing publication practices, ASTM maintains the anonymity of the peer reviewers. The ASTM Committee on Publications acknowledges with appreciation their dedication and contribution to time and effort on behalf of ASTM.

Foreword

This publication, *Oil Flow Studies at Low Temperatures in Modern Engines*, contains papers presented at the symposium of the same name held in St. Louis, Missouri, on June 21, 1999. ASTM Committee D02 on Petroleum Products and Lubricants sponsored the symposium. Harold (Hal) Shaub, Center for Innovation, Inc., Irving, Texas, presided as the symposium chairman and is the editor of this publication.

Contents

Overview

vii

SESSION I

Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Background and Organization— C. J. MAY, E. F. DE PAZ, F. W. GIRSHICK, K. O. HENDERSON, R. B. RHODES, S. TSEREGOUNIS, AND L. H. YING	003
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Engine Selection and Testing Protocol— C. J. MAY, E. F. DE PAZ, F. W. GIRSHICK, K. O. HENDERSON, R. B. RHODES, S. TSEREGOUNIS, AND L. H. YING	009
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Test Oil Selection and Rheological Analysis— F. W. GIRSHICK, E. F. DE PAZ, C. J. MAY, K. O. HENDERSON, R. B. RHODES, S. TSEREGOUNIS, AND L. H. YING	016
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Cold Start Testing— S. TSEREGOUNIS, E. F. DE PAZ, F. W. GIRSHICK, K. O. HENDERSON, C. J. MAY, R. B. RHODES, AND L. H. YING	019
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Phase I Pumpability Testing— K. O. HENDERSON, C. J. MAY, E. F. DE PAZ, F. W. GIRSHICK, R. B. RHODES, S. TSEREGOUNIS, AND L. H. YING	035
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Phase II Pumpability Testing— R. B. RHODES, E. F. DE PAZ, F. W. GIRSHICK, K. O. HENDERSON, C. J. MAY, S. TSEREGOUNIS, AND L. H. YING	055
Cold Starting and Pumpability Studies in Modern Engines—Results from the ASTM D02.07C LTEP Task Force Activities: Summary and Conclusions— C. J. MAY, E. F. DE PAZ, F. W. GIRSHICK, K. O. HENDERSON, R. B. RHODES, S. TSEREGOUNIS, AND L. H. YING	079

SESSION II

Pumpability—Past Accomplishments; Present and Future Challenges— T. W. SELBY	099
Designing Low Temperature Performance for Diverse Basestocks — F. W. GIRSHICK, L. H. GAINES, AND D. J. MARTELLA	122
The Relation between Low-Temperature Rheology of Lubricating Mineral Oils and Gelation Index— R. M. WEBBER, H. F. GEORGE, AND M. J. COVITCH	133
SAE 5W-30 Pumpability Studies in Modern 4- and 8-Cylinder Engines: Gelation Index and MRV Effects— C. J. MAY, B. A. KOENITZER, AND P. K. S. LAI	152

Overview

A symposium titled "Oil Flow Studies at Low Temperatures in Modern Engines" was sponsored by ASTM Committee D02 on June 21, 1999, at the Adams Mark Hotel, St. Louis, Missouri, to summarize and discuss the results of industry (ASTM and others) studies on low temperature oil flow in modern engines with modern oils. The symposium was held in conjunction with the June 20–25, 1999 Committee D02 standards development meetings. Twelve papers were presented during two (AM and PM) sessions. In addition to the studies carried out under the auspices of ASTM, the symposium provided a forum for presentation and discussion of similar studies conducted outside of ASTM technical committees. Seven papers covered the ASTM work while five papers summarized results and conclusions from the independent industry studies. The overall aim of the symposium was to assist the industry in understanding the issues involved in oil flow related engine operation at low temperatures in modern engines (lubricated with modern oils) and to provide a good basis for future specification development.

An extensive industry (ASTM) program on cold start and pumpability, with modern oils in modern engines, was designed and carried out over the past six plus years. This study was in response to four specific concerns voiced by the Fuels and Lubricants (F&L) Division of the Society of Automotive Engineers (SAE) in a May 1992 letter to ASTM Subcommittee D02.07 on Flow Properties. The SAE F&L Division pointed out that five technical changes in modern engines and oils could lead to substantial lowering of the starting temperatures of these engines which could, in turn, adversely effect low temperature pumpability. The five changes included (1) low friction engine designs, (2) fuel injection systems, (3) computer control of ignition and fuel flow, (4) higher power-density starting motors and batteries, and (5) friction modified engine oils.

A Low Temperature Engine Performance (LTEP) task force was established within ASTM Subcommittee D02.07C in June 1992 to study and address the four SAE concerns, namely:

- To determine if modern engines start (on average) at lower temperatures than earlier engine designs do.
- To determine if there is a "safety margin" between limiting cranking and pumping viscosities in modern engines.
- To determine the cranking and pumping limitations of single grade (non-VI improved) engine oils.
- To assess the benefits and limitations of current methods for identifying oils that could result in pumpability failures in engines.

The work reported at the June 21, 1999 symposium went a long way in answering the four SAE F&L Division concerns about low temperatures oil flow in modern engines with modern oils. More specifically, the studies carried out within ASTM and reported in the first seven papers of the symposium, showed that modern (1993–94 model year) engines do indeed start, on average, at substantially lower temperatures than earlier engine designs. Because of this and in order to maintain at least a 5°C safety margin between limiting cranking and pumping viscosities, the SAE, in mid 1995 lowered the MRV measuring temperatures by 5°C and raised the limiting viscosities for each SAE "W" viscosity grade. As a result, the five multigrade and one monograde oil used in the LTEP study demonstrated acceptable pumpability at temperatures 5°C to 9°C lower than the minimum starting temperatures. Although CCS viscosity correlated with engine startability in the LTEP studies, the limiting starting viscosities were considerably higher than the SAE J300 April 1997 limits. Therefore, it was recommended that the industry revisit the cold cranking viscosity/temperature limits. Recently

(Dec. 1999) SAE has successfully balloted modifications to CCS "W" grade measurement temperatures and viscosity limits which are more in line with cold starting data from the LTEP program.

The ASTM LTEP work also showed (1) under appropriate cooling and operating conditions, air-binding pumpability could be generated in certain engine types and that (2) air-binding was only observed in these engines when significant structure was detected in the oils (gel index >40, MRV yield stress 70-105 Pa). This work helped address the fourth SAE concern noted earlier; namely, "to assess the benefits and limitations of current bench test methods for identifying oils that could result in pumpability failures in engines."

Work conducted outside the ASTM LTEP Program also helped address the fourth SAE concern. A paper titled, "SAE 5W-30 Pumpability Studies in Modern 4- and 8-Cylinder Engines: Gelation Index and MRV Effects," by C. J. May, et al., showed that four oils with gelation indices (GI) ranging from 6.0 to 15.7 did not produce air-binding tendencies in full scale engines (2.0L I-4 and 4.6 L V-8) tests. Several drain samples from those pumpability tests showed reduced GI values relative to those for the fresh oils. Perhaps, even short-term engine operation can "break-up" the subtle low temperature structures detected during Scanning Brookfield testing. A second paper titled, "Relation between Low-Temperature Rheology of Lubricating Mineral Oils and Gelation Index," by R. M. Webber, et al., proposes and presents evidence to support the supposition that the gelation index characterizes the onset of nucleation rather than the formation of macroscopic wax crystals that would be associated with a yield stress and gelation.

As far as the future is concerned, used oils in general and, more specifically, sooted oils and highly oxidized oils and their influence on low temperature pumpability are rapidly becoming a new challenge. New skills and perhaps new instruments may be needed to predict the effects of these factors on low temperature pumpability. In preliminary work, described in a paper by T. W. Selby titled, "Pumpability - Past Accomplishments; Present and Future Challenges," a new bench test technique [The Scanning Brookfield Technique-Extended Range (SBT-XR)] has shown promise in predicting low temperature pumpability with highly oxidized (thickened) and sooted used oils. A task force has already been formed in ASTM Subcommittee D02.07 to address these future needs and to investigate the SBT-XR and other approaches as potential viable predictors of "used oil" pumpability.

Much thanks goes to Dr. K. O. Henderson of Cannon Instrument Company, then chairman of ASTM Subcommittee D02.07, for suggesting that this symposium be held; Dr. C. J. May of Imperial Oil Ltd., chairman of the LTEP task force, organizer of the ASTM presentations at this symposium, for acting as symposium moderator, and for the symposium paper authors and ASTM personnel that have made this publication possible.

H. Shaub

Center for Innovation, Inc.,
Irving, TX 75038

Vice Chairman, Subcommittee D02.07
Symposium Chairman and Editor

ISBN 0-8031-2857-6