


ENVIRONMENTAL PRODUCT DECLARATION (EPD)

CommScope FIST-SOSA2 (splice only sub-assembly) Trays

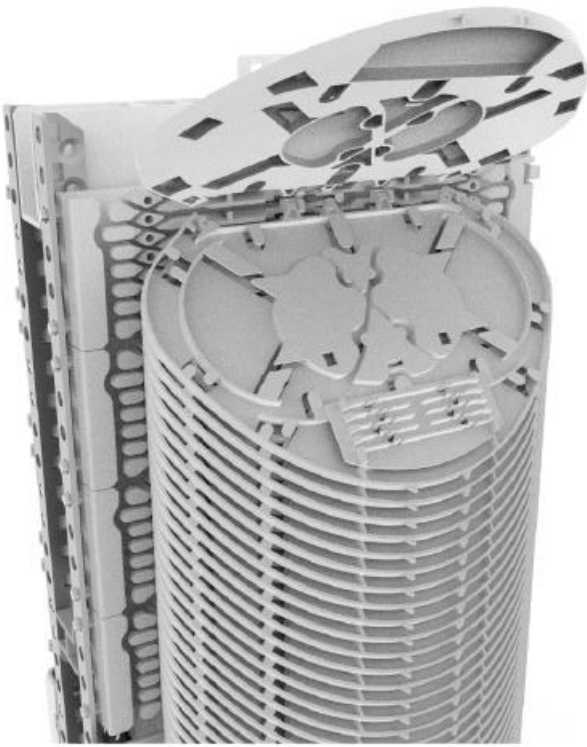

COMMSCOPE®

At CommScope, we believe that corporate responsibility and sustainability means making decisions that have a positive impact on our people, planet and bottom line.

CommScope's leaders have adopted a philosophy on corporate responsibility that embraces our core company values and holds us accountable to produce smart solutions that respect our people and our planet:

Meaningful integrity is a decisive personal and company-wide commitment to enable faster, smarter and more sustainable solutions while demonstrating the utmost respect for our human and natural resources.

This philosophy finds form in three pillars:

- Environmental
- Social
- Governance

Our commitment enables us to invest wisely in our future. By utilizing innovative technology, intelligent engineering and energy-efficient designs, we're building sustainable networks that make our customers more agile while also preserving the natural ecosystems from which we source our raw materials.



ASTM INTERNATIONAL

© 2025 CommScope, LLC. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see <https://www.commscope.com/trademarks>. All product names, trademarks and registered trademarks are property of their respective owners.

FIST™- SOSA2 (splice only sub-assembly) Trays



Environmental Product Declaration (EPD)CommScope® Product
FIST™- SOSA2 Trays

COMMScope®

According to
ISO 14025,
EN 15804 + A2

ASTM INTERNATIONAL

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025, EN 15804 + A2. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	ASTM International, 100 barr harbor drive west conshohocken, PA 19428
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions. Version 8.0. April 29, 2020
MANUFACTURER NAME AND ADDRESS	CommScope, Inc. 3642 E US Highway 70, Claremont, North Carolina 28610
DECLARATION NUMBER	EPD 1071
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	CommScope® FIST™- SOSA2 (splice only sub-assembly) Trays Functional Unit = One assembled tray unit mounted on a groove plate, with a reference service life of 25 years
REFERENCE PCR AND VERSION NUMBER	PEP ecopassport Program: Part A PCR for Electrical, Electronic and HVAC-R Products and Part B PSR Specific Rules for Wire Cables and Accessories
DESCRIPTION OF PRODUCT APPLICATION/USE	The FIST- SOSA2 Trays are designed to provide total fiber management, high splice capacity, and flexible deployment options for modern telecommunication networks. They are essential for organizing, protecting, and managing fiber splices in a wide range of network applications.
PRODUCT RSL DESCRIPTION (IF APPL.)	25 Years
MARKETS OF APPLICABILITY	Europe
DATE OF ISSUE	September 24, 2025
PERIOD OF VALIDITY	5 Years
EPD TYPE	Product Specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle-to-Grave
YEAR(S) OF REPORTED PRIMARY DATA	2024
LCA SOFTWARE DATABASE(S) & VERSION NUMBER	SimaPro 10.2.0.0 & ecoinvent 3.11
LCIA METHODOLOGY & VERSION NUMBER	CML- IA Baseline 3.11, TRACI 2.2 and EN15804+A2 (adapted) 1.03
The sub-category PCR review was conducted by:	
This declaration was independently verified in accordance with ISO 14025: 2006. The "PEP ecopassport Program PCR for electrical, electronic and HVAC-R products", v4.0, 2021 based on EN 15804:2012 + A2:2019, serves as the core PCR. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	Timothy S Brooke ASTM International
This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	
This life cycle assessment was independently verified in accordance with ISO 14044 and reference PCR by:	Thomas P. Gloria, Ph. D. Industrial Ecology Consultants

Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance using EPD information shall consider all relevant information modules over the full life cycle of the products within the building. This PCR allows EPD comparability only when the same functional requirements between products are ensured and the requirements of EN 15804:2012+A2:2019 are met. It should be noted that different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

General Information

Description of Company/Organization

CommScope (NASDAQ: COMM) helps design, build and manage wired and wireless networks around the world. Corporate responsibility and sustainability drive us to make decisions that benefit people, society, the planet and our bottom line. We enable faster, smarter and more sustainable solutions while respecting human and natural resources. Innovative technology, intelligent engineering and energy-efficient design help us meet our goals. CommScope builds sustainable networks that make our customers more agile, simultaneously helping to preserve the natural ecosystems from which we source components and materials.

Product Description

The FIST-Fiber Management/ SOSA2-Trays are modular, high-capacity fiber management solutions designed for advanced telecommunication networks. They provide secure containment, and physical protection for fiber splices, accommodating up to 24 splices per tray and supporting both single circuit and single element management. Compatible with all standard fiber types and independent of cable construction, these trays ensure versatile deployment across various environments. Their robust, tool-less, and modular design allows for easy installation, re-entry, and network reconfiguration, while maintaining high environmental protection standards.

Product Type: Fiber Splice Tray

Product Characteristics: Modular and flexible fiber management, Compliant with most splice types, expandable splice capacity, storage area for looped cable

This EPD covers the following FIST-SOSA2 (Splice only sub-assembly) products:


Tray type	Product	No. of Trays	Splice Holder type
SE- Single element	FIST-SOSA2-2SE-S	2	Heat-shrinkable
	FIST-SOSA2-4SE-S	4	Heat-shrinkable
	FIST-SOSA2-5SE-S	5	Heat-shrinkable
SC- Single circuit	FIST-SOSA2-4SC-S	4	Heat-shrinkable
	FIST-SOSA2-8SC-12A	8	ANT
SLE- Slim single element	FIST-SOSA2-4SLE-S	4	Heat-shrinkable
	FIST-SOSA2-8SLE-S	8	Heat-shrinkable



SE- Single element trays




SC- Single circuit trays

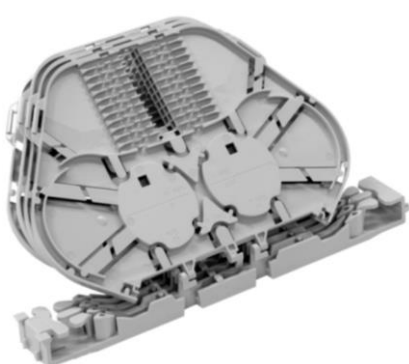

SE- Slim single element trays

Flow Diagram

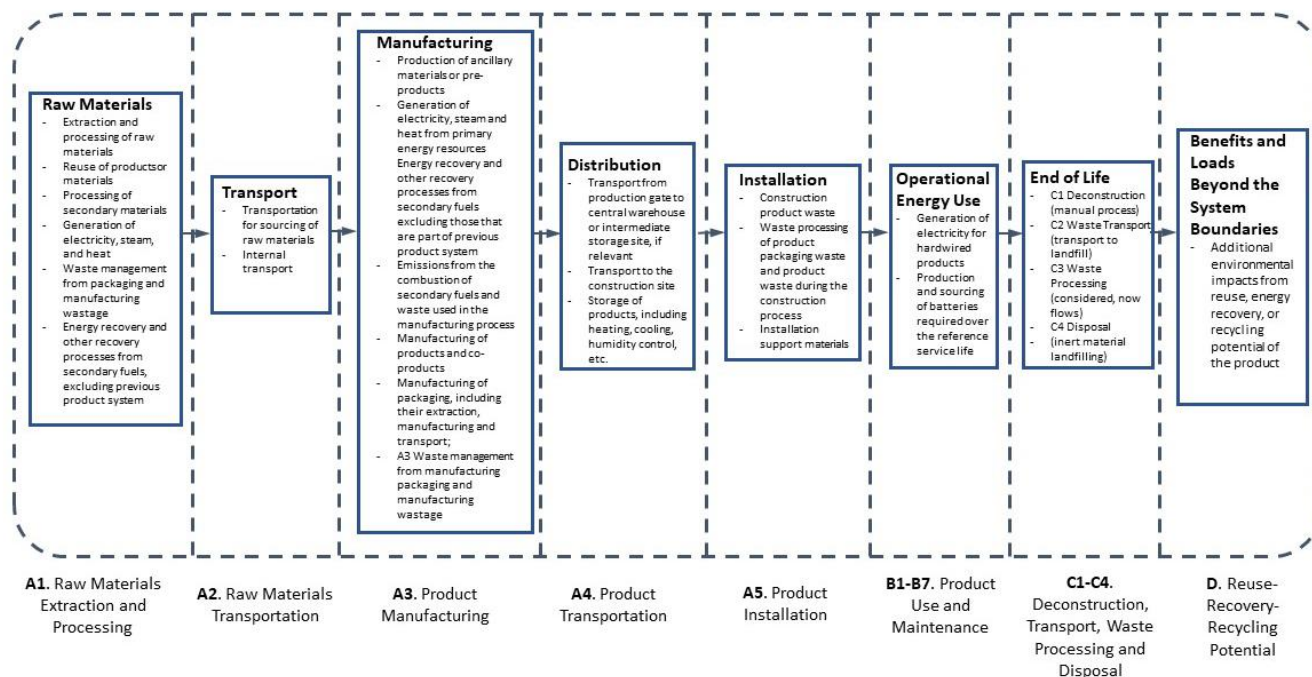

Manufacturer Specific EPD

This product-specific EPD was developed based on the cradle-to-grave (modules A1-D) Life Cycle Assessment. The EPD accounts for raw material extraction and processing, transport, product manufacturing, distribution, installation, disposal, and potential benefits and loads following the end-of-life disposal. An impact assessment was completed for each FIST-SOSA2 tray listed before and the product type with the highest impact is reported. Other product types are represented through the scaling factor table and can be independently calculated.

Application

Cable terminations provide universal, secure, and damage-free retention for cables and microtubes, supporting a wide range of cable constructions including central or dual strength member and aramid yarn terminations. The system enables fully wraparound and remote cable preparation and CTU installation, allows opening of gel segments while cable retention remains in place, and is suitable for feeder and distribution network applications.

Material Composition

The primary product materials are indicated as a percentage mass to enable the user of the EPD to understand the composition of the product in delivery status. The composition of the reference Cable termination product is as follows:

Reference Product: FIST-SOSA2-8SLE-S	
Material type	Mass percentage
PC+ABS	100 %

Technical Details

For the declared product, the following technical data in the delivery status must be provided with reference to the test standard:

Technical Data	
General Specifications	
Product Type	Fiber Splice Tray
Product Series	FIST-SOSA2
Application	FIST- Fiber splice closures
Tray types	Single circuit, single element
Splice tray chip type	Heat-shrinkable, ANT
Max. number of splices	24 per tray
Max. splice count	1248 for E-size closure
Color	Gray
Compatible fiber types	G.652D & G.657 series
Packaging type	Bag, carton
Material Specifications	
Material Type	PC/ABS
Environmental Specifications	
Operating Temperature	-40°C to +70°C (-40°F to +158°F)
Environmental Space	Indoor & Outdoor

Properties of Declared Product as Shipped

CommScope FIST-SOSA2 kits include Grooveplate and Trays. Different sizes of groove plate can be chosen based on the number of trays. Tray types can be chosen depending on the application (splicing single element or single circuit) and splice protector holder types (smouv, ANT).



Methodological Framework

Functional Unit

The declaration refers to the functional unit of one assembled piece of FIST-SOSA2-8SLE-S tray unit.

Name	Value	Unit
Functional Unit	1	Assembled piece
Maximum Mass	0.308	kg

System Boundary

This is a cradle to grave Environmental Product Declaration. The following life cycle phases were considered:

Life Cycle Stage	Life Cycle Module	Module	X = Included/ Not Included
Product Stage	Raw Material Supply & Parts manufacturing	A1	X
	Transport	A2	X
	Assembly process	A3	X
Construction Process Stage	Transport from gate to the site	A4	X
	Installation process	A5	X
Use Stage	Use	B1	X
	Maintenance	B2	X
	Repair	B3	X
	Replacement	B4	X
	Refurbishment	B5	X
	Operational energy use	B6	X
	Operational water use	B7	X
End of Life Stage*	Deconstruction/ demolition	C1	X
	Transport	C2	X
	Waste processing	C3	X
	Disposal	C4	X
Benefits and Loads Beyond the System Boundaries	Reuse-Recovery-Recycling potential	D	X

* This includes the provision of all materials, products, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues.

Notes:

- There are no activities in the Modules B1-B7 and C1 as the values are “0”
- Module D is reported but excluded from the total life cycle results as it falls outside the system boundary

Reference Service Life

The reference service life of FIST-SOSA2 trays is 25 years.

Allocation

Allocation was determined on a per piece basis for the system.

Cut-off Criteria

Processes whose total contribution to the final result, with respect to their mass and in relation to all considered impact categories, is less than 1% can be neglected. The sum of the neglected processes may not exceed 5% by mass of the considered impact categories. For this, a documented assumption is permissible.

For Hazardous Substances the following requirements apply:

- The Life Cycle Inventory (LCI) of hazardous substances will be included, if the inventory is available.
- If the LCI for a hazardous substance is not available, the substance will appear as an input in the LCI of the product, if its mass represents more than 0.1% of the product composition.
- If the LCI of a hazardous substance is approximated by modeling another substance, documentation will be provided.

This EPD is in compliance with the cut-off criteria. No processes were neglected or excluded. Capital items for the production processes (machine, buildings, etc.) were not taken into consideration.

Data Sources

Primary data were collected for every process in the product system under the control of CommScope. Secondary data from the ecoinvent 3.11 database were utilized when necessary. These data were evaluated and have temporal, geographic, and technical coverage appropriate to the scope of the product category.

Data Quality

The data sources used are complete and representative of global systems in terms of geographic and technological coverage and are a recent vintage (i.e. less than ten years old). Primary data is based on direct information from manufacturers. Secondary data sets were used for raw materials extraction and processing, end of life, transportation, and energy production flows. Wherever secondary data is used, the study adopts critically reviewed data for consistency, precision, and reproducibility to limit uncertainty.

Period Under Review

The period under review is the full calendar year of 2024.

Treatment of Biogenic Carbon

The uptake and release of biogenic carbon throughout the product life cycle follows EN15804+A2 Section 6.4.4.

Comparability and Benchmarking

A comparison or an evaluation of EPD data is only possible if all data sets to be compared were created according to EN 15804 + A2 and the building context, respectively the product-specific characteristics of performance, are taken into account. Environmental declarations from different programs may not be comparable. Full conformance with the PCR allows for EPD comparability only when all stages of a product's life cycle have been considered. However, variations and deviations are possible.

Units

The LCA results within this EPD are reported in SI units.


Additional Environmental Information

Background Data

For life cycle modeling of the considered products, Simapro- LCA software tool developed by PRé-Sustainability, is used. The ecoinvent database contains consistent and documented datasets which are documented online. To ensure comparability of results in the LCA, data from the ecoinvent database were used for materials, energy, transportation, and waste treatment.

Manufacturing

The manufacturing process for CommScope FIST-MSC cable terminations begin with the sourcing of raw material PC+ABS. These materials are delivered to external manufacturers, where they undergo the Injection molding process. The finished components are then packaged and shipped to the CommScope production site in Brno, CZ (CZ18), where they are repacked for final distribution. From there, products are dispatched to either CommScope delivery centers or directly to customer warehouses for end use.

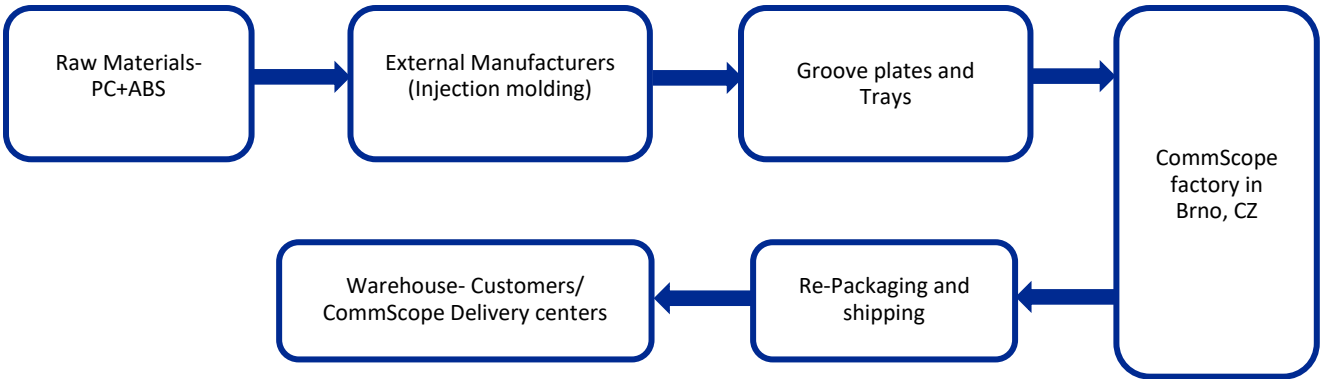

Packaging

The packaging for this product consists of plastic bags for individual unit protection, corrugated fiberboard for bulk packaging, and wooden pallets primarily used for transportation.

Quantity % by Weight	
Material	Maximum
LD-PE bags	32.97 %
Cardboard	38.41 %
Wood	28.62 %
Total	100 %

Transformation

Transport to Installation Site (A4)		
Description	Value	Unit
Transport type	Truck/ lorry > 32 metric ton	
Fuel type/ Liters of Fuel	Diesel, compliant with EURO5	
Liters of Fuel	35	l/100 km
Transport Distance (average)	700	km
Capacity Utilization	85	%
Weight of one assembled bracket with packaging transported (maximum)	0.308	kg

Product Installation

The FIST-SOSA2 kit comprises both grooveplates and trays, which can be supplied either individually or along with other FIST-MSC products. The selection of Grooveplate type and quantity is determined by the specific tray configuration and the number of trays required for the application. During installation, grooveplates are first mounted onto the Universal Mounting System (UMS) profile, after which trays are inserted into the wraparound grooveplates. The installation process is entirely manual, requiring only the removal and disposal of packaging materials, with no need for additional materials or energy input; it is a tool-free procedure that generates no installation waste.

Installation into the building (A5)		
Name	Max	Unit
Auxiliary materials	-	kg
Water consumption	-	m ³
Other resources	-	kg
Electricity consumption	-	kWh
Other energy carriers	-	MJ
Product loss per functional unit	0.00E+00	kg
Waste materials at construction site	0.00E+00	kg
Output substance (recycle)	0.00E+00	kg
Output substance (landfill)	0.00E+00	kg
Output substance (incineration)	0.00E+00	kg
Packaging waste (recycle)	2.80E-02	kg
Packaging waste (landfill)	3.47E-02	kg
Packaging waste (incineration)	2.84E-02	kg
Direct emissions to ambient air*, soil, and water	0.00E+00	kg CO ₂
VOC emissions	-	kg

*CO₂ emissions to air from disposal of packaging

Reference Service Life		
Name	Value	Unit
Reference Service Life	25	years
Declared product properties (at the gate) and finishes, etc.	-	
Design application parameters (if instructed by the manufacturer), including the references to the appropriate practices and application codes	-	
An assumed quality of work, when installed in accordance with the manufacturer's instructions	-	
Outdoor environment, (for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature	-	
Indoor environment (for indoor applications), e.g. temperature, moisture, chemical exposure	-	
Usage conditions, e.g. frequency of use, mechanical exposure	-	
Maintenance e.g. required frequency, type and quality and replacement of components	-	

Product Use

No cleaning, maintenance, repair, replacement or refurbishment is required. There is no operational energy or water use.

Operational Energy Use (B6)		
Name	Value	Unit
Ancillary materials specified by material	-	kg
Net freshwater consumption	-	m ³
Electricity consumption	-	kWh
Power output of equipment	-	kWh
Characteristic performance	-	-
Further assumptions for scenario development	-	-

Disposal

The product can be manually disassembled to separate different individual parts or materials for disposal. Most of the parts are disposed through waste incineration with energy recovery or landfilled, in accordance with the PCR.

End of Life (C2-C4)		
Name	Max	Unit
Collected separately	2.16E-01	kg
Collected as mixed waste	0.00E+00	kg
Reuse	0.00E+00	kg
Recycling	0.00E+00	kg
Landfilling	1.08E-01	kg
Incineration with energy recovery	1.08E-01	kg
Energy conversion- Electricity	20	%
Energy conversion- Heat	50	%

Re-use Phase

Re-use of the product is not common. However, energy in the form of heat and electricity has been recovered from the waste processing of packaging materials at the Installation stage (A5) and waste processing of product materials at the end-of-life disposal stage (C2-C4). Energy recovery for the incineration of polymer materials was calculated according to Appendix D of Part A PCR.

Energy recovery Potential (D)		
Name	Max	Unit
Net energy benefit of energy recovery from packaging wastes incineration (A5-Installation) in the form of heat	4.48E-01	MJ
Net energy benefit of energy recovery from packaging wastes incineration (A5-Installation) in the form of electricity	1.79E-01	MJ
Net energy benefit of energy recovery from product wastes incineration (C2-C4 End of life Disposal) in the form of heat	1.35E+00	MJ
Net energy benefit of energy recovery from product wastes incineration (C2-C4 End of life Disposal) in the form of electricity	5.40E-01	MJ
Total Net energy benefits of energy recovery in the form of heat	1.80E+00	MJ
Total Net energy benefits of energy recovery in the form of electricity	7.19E-01	MJ

LCA Results – Maximum Impact for the product “FIST-SOSA2-8SLE-S”

Results shown below were calculated using the CML-IA baseline V3.11 / EU25 methodology

CML-IA baseline- Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Abiotic depletion	kg Sb eq	9.08E-06	8.91E-06	6.40E-08	2.89E-08	6.40E-08	1.24E-08	2.19E-09	-1.44E-07
Abiotic depletion (fossil fuels)	MJ	2.98E+01	2.89E+01	3.27E-01	1.52E-01	3.27E-01	4.70E-02	2.60E-02	-7.71E-01
Global warming (GWP100a)	kg CO2 eq	1.90E+00	1.53E+00	2.26E-02	6.21E-02	2.26E-02	2.57E-01	9.53E-03	-6.61E-02
Ozone layer depletion (ODP)	kg CFC-11 eq	4.18E-08	4.07E-08	3.97E-10	1.82E-10	3.97E-10	7.38E-11	2.40E-11	-9.03E-10
Photochemical oxidation	kg C2H4 eq	4.06E-04	3.92E-04	3.48E-06	4.12E-06	3.48E-06	8.94E-07	1.70E-06	-1.24E-05
Acidification	kg SO2 eq	4.70E-03	4.51E-03	5.72E-05	3.21E-05	5.72E-05	4.16E-05	6.35E-06	-2.79E-04
Eutrophication	kg PO4--- eq	4.49E-03	2.21E-03	1.56E-05	4.93E-04	1.56E-05	3.12E-05	1.72E-03	-2.23E-04

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Results shown below were calculated using TRACI 2.2 V1.00/ US-Canadian 2008 Methodology

TRACI 2.2 - Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Ozone depletion	kg CFC-11 eq	5.14E-08	5.00E-08	5.25E-10	2.40E-10	5.25E-10	8.48E-11	3.15E-11	-1.15E-09
Global warming	kg CO2 eq	1.88E+00	1.51E+00	2.25E-02	5.99E-02	2.25E-02	2.57E-01	8.82E-03	-6.57E-02
Smog	kg O3 eq	8.03E-02	7.43E-02	1.60E-03	9.64E-04	1.60E-03	1.63E-03	2.02E-04	-2.83E-03
Acidification	kg SO2 eq	5.00E-03	4.77E-03	6.68E-05	3.88E-05	6.68E-05	5.48E-05	8.34E-06	-2.71E-04
Freshwater eutrophication	kg P eq	5.66E-04	2.59E-04	9.36E-07	6.90E-05	9.36E-07	2.36E-06	2.34E-04	-2.91E-05
Marine eutrophication	kg N eq	7.44E-04	5.75E-04	1.37E-05	1.33E-05	1.37E-05	1.52E-05	1.13E-04	-2.77E-05

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

results shown below were calculated using EN 15804 + A2 (adapted) V1.03 Methodology.

EN 15804+A2 (adapted)- Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Acidification	mol H+ eq	5.71E-03	5.45E-03	7.54E-05	4.29E-05	7.54E-05	5.87E-05	8.57E-06	-3.30E-04
Climate change	kg CO2 eq	1.81E+00	1.41E+00	2.28E-02	8.77E-02	2.28E-02	2.57E-01	9.96E-03	-8.48E-02
Climate change - Biogenic	kg CO2 eq	1.68E-03	-1.25E-01	1.39E-05	1.27E-01	1.39E-05	1.83E-05	5.19E-06	0.00E+00
Climate change - Fossil	kg CO2 eq	1.90E+00	1.54E+00	2.28E-02	5.22E-02	2.28E-02	2.57E-01	9.96E-03	-6.61E-02
Climate change - Land use and LU change	kg CO2 eq	1.54E-03	1.51E-03	8.18E-06	3.90E-06	8.18E-06	2.00E-06	7.25E-07	-1.96E-04
Ecotoxicity, freshwater	CTUe	2.31E+01	2.18E+01	3.91E-02	3.24E-01	3.91E-02	5.05E-01	3.63E-01	-1.50E-01
Ecotoxicity, freshwater - inorganics	CTUe	1.90E+01	1.77E+01	3.75E-02	3.23E-01	3.75E-02	5.05E-01	3.62E-01	-1.49E-01
Ecotoxicity, freshwater - organics	CTUe	4.12E+00	4.12E+00	1.55E-03	8.67E-04	1.55E-03	4.52E-04	2.12E-04	-1.49E-03
Particulate matter	Disease.	6.08E-08	5.46E-08	2.31E-09	1.09E-09	2.31E-09	3.08E-10	1.91E-10	-1.18E-09
Eutrophication, marine	kg N eq	1.47E-03	1.13E-03	2.56E-05	2.78E-05	2.56E-05	3.34E-05	2.22E-04	-6.00E-05
Eutrophication, freshwater	kg P eq	4.34E-04	4.29E-04	1.61E-06	9.83E-07	1.61E-06	8.45E-07	1.25E-07	-6.20E-05
Eutrophication, terrestrial	mol N eq	1.21E-02	1.10E-02	2.79E-04	1.68E-04	2.79E-04	2.84E-04	3.49E-05	-5.14E-04
Human toxicity, cancer	CTUh	1.06E-09	1.03E-09	3.72E-12	3.39E-12	3.72E-12	2.19E-11	6.65E-13	-1.10E-11
Human toxicity, cancer - inorganics	CTUh	1.70E-10	1.45E-10	1.60E-12	2.25E-12	1.60E-12	1.93E-11	5.00E-13	-6.92E-12
Human toxicity, cancer - organics	CTUh	8.89E-10	8.81E-10	2.12E-12	1.15E-12	2.12E-12	2.65E-12	1.65E-13	-4.10E-12
Human toxicity, non-cancer	CTUh	1.20E-08	1.05E-08	2.15E-10	2.18E-10	2.15E-10	7.68E-10	1.16E-10	-5.00E-10
Human toxicity, non-cancer - inorganics	CTUh	1.10E-08	9.51E-09	2.01E-10	1.93E-10	2.01E-10	7.66E-10	1.04E-10	-4.85E-10
Human toxicity, non-cancer - organics	CTUh	1.03E-09	9.69E-10	1.33E-11	2.50E-11	1.33E-11	1.43E-12	1.15E-11	-1.50E-11
Ionising radiation	kBq U-235 eq	1.66E-01	1.65E-01	3.73E-04	1.73E-04	3.73E-04	8.24E-05	2.23E-05	-4.34E-02
Land use	Pt	1.67E+01	1.58E+01	3.35E-01	1.63E-01	3.35E-01	1.39E-02	6.22E-02	-2.22E-01
Ozone depletion	kg CFC11 eq	4.80E-08	4.66E-08	4.98E-10	2.28E-10	4.98E-10	8.15E-11	2.99E-11	-1.10E-09
Photochemical ozone formation	kg NMVOC eq	5.83E-03	5.43E-03	1.19E-04	6.81E-05	1.19E-04	7.15E-05	1.44E-05	-1.64E-04
Resource use, fossils	MJ	3.28E+01	3.19E+01	3.33E-01	1.55E-01	3.33E-01	4.83E-02	2.64E-02	-1.54E+00
Resource use, minerals and metals	kg Sb eq	9.07E-06	8.90E-06	6.40E-08	2.89E-08	6.40E-08	1.24E-08	2.19E-09	-1.42E-07
Water use	m3 depriv.	5.15E-01	5.26E-01	1.51E-03	-4.63E-03	1.51E-03	8.32E-03	-1.72E-02	-1.46E-02

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Results below contain the resource use throughout the life cycle of the product.

EN 15804 +A2- Resource Use										
	Parameters	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	3.95E+00	3.94E+00	5.14E-03	2.46E-03	5.14E-03	1.98E-03	3.64E-04	-3.46E-01
PERM	Use of renewable primary energy resources used as raw materials	MJ	9.67E-01	9.67E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	Total use of renewable primary energy resources	MJ	4.92E+00	4.90E+00	5.14E-03	2.46E-03	5.14E-03	1.98E-03	3.64E-04	-3.46E-01
PENRE	Use of non-renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	3.53E+01	3.43E+01	3.54E-01	1.65E-01	3.54E-01	5.25E-02	2.81E-02	-1.60E+00
PENRM	Use of non-renewable primary energy resources used as raw materials	MJ	8.70E+00	8.70E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	Total use of non-renewable primary energy resources	MJ	4.40E+01	4.30E+01	3.54E-01	1.65E-01	3.54E-01	5.25E-02	2.81E-02	-1.60E+00
SM	Use of secondary material	kg	4.52E-02	4.52E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	Use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	Use of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	Net use of fresh water	m ³	5.04E-01	5.15E-01	1.52E-03	-4.63E-03	1.52E-03	8.26E-03	-1.72E-02	-1.46E-02

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study


The results below contain the waste and output flows throughout the life cycle of the product.

EN 15804 +A2- Waste Categories and Output Flows										
Parameters		Units	Total	A1-A3	A4	A5	C2	C3	C4	D
HWD	Hazardous waste disposed	kg	4.00E-03	1.36E-03	9.51E-06	4.16E-04	9.51E-06	2.20E-03	5.63E-07	-0.001642
NHWD	Non-hazardous waste disposed	kg	3.44E-01	1.28E-01	2.87E-02	4.76E-02	2.87E-02	2.74E-03	1.08E-01	-3.86E-03
RWD	Radioactive waste disposed	kg	4.23E-05	4.21E-05	9.17E-08	4.26E-08	9.17E-08	2.08E-08	5.45E-09	-1.11E-05
CRU	Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER	Materials for energy recovery	kg	1.08E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.08E-01	0.00E+00	0.00E+00
EE	Exported energy	MJ	1.89E+03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.89E+03	0.00E+00	0.00E+00

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

LCA Interpretation – Maximum Impact for the product “FIST-SOSA2-8SLE-S”

The chart below of overall impact results based on CML method demonstrates that the A1-A3 stage is the dominant contributor to environmental impacts across all categories, consistently accounting for the largest share in each impact area. Other life cycle stages, such as A4, A5 and C2-C4 contribute only marginally to most categories, with the exception of "Global warming (GWP100a)" and "Eutrophication," where C2-C4 and A5 have a more noticeable, but still secondary, impact. The end-of-life stage (C2-C4) generally have minimal influence compared to the manufacturing and raw material stages (A1-A3). This pattern suggests that the environmental profile of the product is overwhelmingly shaped by the early life cycle stages, particularly raw material extraction and manufacturing.

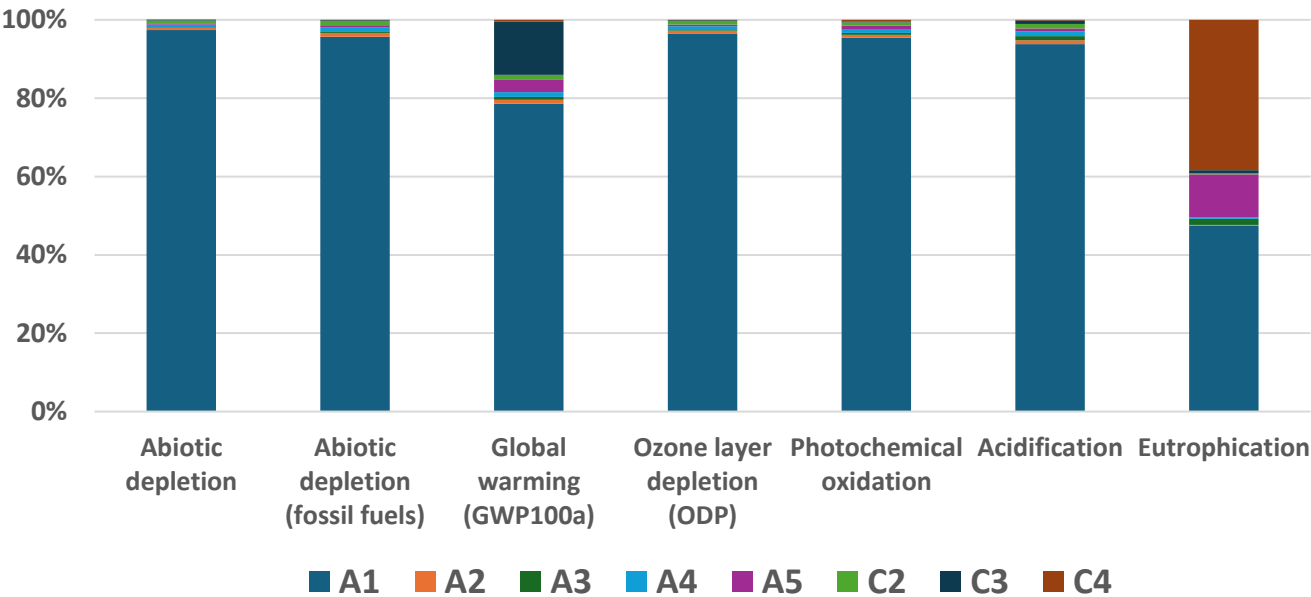

Scaling Factor Tables

For EPDs with product groups, an impact assessment was completed for each product and the highest impacts were reported as representations of the product group. The rest of the products in the group are represented through scaling factor tables and can be independently calculated for the results based on CML method.

The table below presents the scaling factors for the FIST-SOSA2 (Splice only sub-assembly) Tray units. To determine the impact results for these products, multiply the respective scaling factors by the LCA results provided in the Maximum Impact section. This approach ensures consistent and transparent calculation of environmental impacts across all products in the group.

	Product Types						
	FIST-SOSA2-8SLE-S	FIST-SOSA2-2SE-S		FIST-SOSA2-4SE-S		FIST-SOSA2-5SE-S	
Impact category	Total & A1-A3	Total	A1-A3	Total	A1-A3	Total	A1-A3
Abiotic depletion	1	0.40	0.40	0.75	0.75	0.74	0.74
Abiotic depletion (fossil fuels)	1	0.40	0.40	0.75	0.74	0.74	0.74
Global warming (GWP100a)	1	0.41	0.40	0.75	0.75	0.74	0.74
Ozone layer depletion (ODP)	1	0.40	0.40	0.75	0.75	0.74	0.74
Photochemical oxidation	1	0.42	0.41	0.74	0.74	0.74	0.74
Acidification	1	0.41	0.41	0.75	0.75	0.75	0.75
Eutrophication	1	0.43	0.43	0.75	0.76	0.76	0.76

	Product Types					
	FIST-SOSA2-4SC-S		FIST-SOSA2-8SC-12A		FIST-SOSA2-4SLE-S	
Impact category	Total	A1-A3	Total	A1-A3	Total	A1-A3
Abiotic depletion	0.49	0.49	0.85	0.85	0.55	0.55
Abiotic depletion (fossil fuels)	0.50	0.50	0.86	0.85	0.56	0.56
Global warming (GWP100a)	0.51	0.50	0.86	0.85	0.56	0.56
Ozone layer depletion (ODP)	0.49	0.49	0.85	0.85	0.56	0.55
Photochemical oxidation	0.51	0.51	0.87	0.87	0.57	0.57
Acidification	0.50	0.50	0.86	0.86	0.57	0.57
Eutrophication	0.52	0.52	0.87	0.86	0.58	0.58

The scaling factors are reported only for the A1-A3 life cycle stages, as these stages account for over 80% of the total environmental impacts for the product group.

The above scaling factors are also applicable to the following similar product types, which have slight variations in design and other parameters.

LCA- Covered Product	Equivalent products applicable for Scaling Factors		
FIST-SOSA2-2SE-S	FIST-SOSA2-2SE-A	FIST-SOSA2-2SE-A-DE19	
FIST-SOSA2-4SE-S	FIST-SOSA2-4SE-A	FIST-SOSA2-4SE-A-DE19	FIST-SOSA2-4SE-S-others
FIST-SOSA2-5SE-S	FIST-SOSA2-5SE-A		
FIST-SOSA2-4SC-S	FIST-SOSA2-4SC-12A	FIST-SOSA2-4SC-A-DE19	
FIST-SOSA2-8SC-S	FIST-SOSA2-8SC-12A	FIST-SOSA2-8SC-A-DE19	FIST-SOSA2-8SC-ARS
FIST-SOSA2-4SLE-S	FIST-SOSA2-4SLE-C		
FIST-SOSA2-8SLE-S	FIST-SOSA2-8SLE-C		

Additional Environmental Information

Environmental and Health During Manufacturing

CommScope values employees' health, safety and well-being. To this end, we maintain a robust company-wide environment, health and safety (EHS) management system. This is an integrated program based on the requirements of the International Standards of ISO45001 and ISO14001. To support this integrated EHS management system, CommScope utilizes a web-based platform, the BSI Entropy™ tool. This tool supports the management of our EHS processes and operations at the corporate and facility level. All EHS management system records (policies, procedures, method statements, health and safety risk assessments, environmental aspect/impact assessments, legal requirements, permits, training, internal and external audits, incidents and implemented CAPA, KPIs, and other records related to EHS) are maintained and managed in Entropy. In addition, 90% of CommScope manufacturing facilities are certified according to the ISO14001 and ISO45001 standards. Our vision and commitments are detailed in our [EHS Policy](#).

CommScope understands the need to address the environmental impacts of its products and services. CommScope engages product development teams in designing innovative and more sustainable solutions across a product's life cycle—from design and manufacturing to product use and end of life.

CommScope is committed to demonstrating a high standard of global product compliance practices. Through this commitment, we actively monitor global environmental trends and emerging regulatory requirements that may affect our products, operations, supply chain, and customer base. We are committed to be compliant with all applicable environmental product related legal and other requirements. To achieve this, we have a global organization comprising environmental specialists, engineers, and product compliance experts who are constantly ensuring our compliance status is maintained. We manage our compliance using a cross-functional approach with our engineers, designers, quality organization, supply chain organization, and production.

CommScope is committed to upholding the human rights of its employees. To ensure our employees are treated with dignity and respect, we follow a well-established Code of Ethics and Business Conduct and Labor Policy that align with recognized standards and guidelines from the International Labor Organization, the United Nations Global Compact, the UN Universal Declaration of Human Rights, SA8000 and applicable laws.

Environmental and Health During Installation

There is no harmful emissive potential. No damage to health or impairment is expected under normal use corresponding to the intended use of the product.

Extraordinary Effects

Fire

No extraordinary effects to the environment can be anticipated during exposure to fire.

Water

Contains no substances that have any impact on water in case of flood.

Mechanical Destruction

No danger to the environment can be anticipated during mechanical destruction.

Delayed Emissions

Global warming potential is calculated using the CML- IA Baseline 3.11, TRACI 2.2 and EN15804+A2 (adapted) 1.03 impact assessment methodologies. Delayed emissions are not considered.

Environmental Activities and Certifications

Our Sustainability Report details CommScope's efforts to operate the business ethically and with integrity; protect the environment; maintain the health, safety and well-being of our workforce; and support the communities in which we operate. To learn more, view our comprehensive Sustainability Report at <https://www.commscope.com/corporate-responsibility-and-sustainability/>.

CommScope maintains a variety of certifications based on the widely accepted industry standards:

- Quality Management System certification (ISO9001/TL9000)
- Environmental Management System certification (ISO14001)
- Health and Safety Management System certification (ISO45001)

These certificates can be downloaded from our company website:

<https://www.commscope.com/corporate-responsibility-and-sustainability/philosophy/#certifications>

Product sustainability certifications including EPDs and Health Product Declarations (HPDs) can be downloaded from our company website:

<https://www.commscope.com/corporate-responsibility-and-sustainability/product-sustainability/certifications/>

Further Information

CommScope Inc.

3642 E US Highway 70

Claremont, North Carolina 28610

ProductSustainability@commscope.com

References

- PCR PEP ecopassport Program: Product Category Rules for Electrical, Electronic and HVAC-R Products, v4.0, 2021.
- PSR PEP ecopassport Program Product Specific Rules specific for Wires, Cables and Accessories, v4.0, 2022
- LCA tool & Databases Simapro Craft version 10.2.0.0 of LCA software & ecoinvent 3.11, Industry data 2.0 databases.
- ISO 14025 ISO 14025:2011-10, Environmental labels and declarations — Type III environmental declarations — Principles and procedures.
- ISO 14040 ISO 14040:2009-11, Environmental management — Life cycle assessment — Principles and framework.
- ISO 14044 ISO 14044:2006-10, Environmental management — Life cycle assessment — Requirements and guidelines.
- EN 15804 + A2 EN 15804:2012+A2:2019/AC:2021 - Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products
- ASTM 2020 ASTM International General Program Instructions v8.0, April 29, 2020
- Characterization Method IPCC. 2021. Climate Change 2021. The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [Masson, delmotte, V., et al] Cambridge University Press, Cambridge, UK and New York, NY, USA (<http://www.ipcc.ch/report/ar6/wg1/>).
- Characterization Method Hauschild M.Z., & Wenzel H. Environmental Assessment of Products. Springer, US, Vol. 2, 1998.
- Characterization Method Heijungs R., Guinée J.B., Huppes G., Lankreijer R.M., Udo de Haes H.A., Wegener Sleeswijk A. Environmental Life Cycle Assessment of Products: Guide and Backgrounds. CML. Leiden University, Leiden.
- Characterization Method Jenkin M.E., & Hayman G.D. Photochemical ozone creation potentials for oxygenated volatile organic compounds: sensitivity to variations in kinetic and mechanistic parameters. Atmospheric Environment. 1999, 33 (8) pp. 1275-1293.
- Characterization Method WMO. 1999. Scientific Assessment of Ozone Depletion: 1998, World Meteorological Organization Global Ozone Research and Monitoring Project - Report No. 44, WMO, Geneva.
- Characterization Method Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers- version 1.2, January 2017.

Contact Information

Study Commissioner

For more information, visit our website at

<https://www.commscope.com/>



- Contact customer support for product and technical questions at <https://www.commscope.com/contact-us/>
- Contact product compliance at productsustainability@commscope.com
- Contact Corporate Responsibility & Sustainability team for sustainability questions at sustainability@commscope.com

LCA Practitioner

Prabu Pushpanathan

CommScope Inc.

3642 E US Highway 70

Claremont, North Carolina 28610

ProductSustainability@commscope.com