

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### Features and Benefits

- Acoustically absorbent panels that blend in or stand out as desired
- Easy to install direct to deck using hat channel and fasteners
- Can be installed in addition to other specialty ceilings as a backdrop or alone as an acoustic treatment for open plenum design
- ClimaPlus™ 30-year limited system warranty against visible sag, mold, and mildew



TRACI V2.1 ENVIRONMENTAL IMPACTS) - UMBRAL™ DIRECT MOUNT PANELS (WHITE)		
Functional Unit – 1 sf (0.093 m <sup>2</sup> )	Cradle-to-Gate (A1-A3)	Cradle-to-Grave (A1-C4)
Global Warming Potential (kg CO <sub>2</sub> eq.)	4.01E-01	4.71E-01
Ozone Depletion Potential (kg CFC-11 eq.)	4.50E-02	4.83E-02
Acidification Potential (kg SO <sub>2</sub> eq.)	4.58E-02	4.94E-02
Eutrophication Potential (kg N eq.)	4.51E-02	4.85E-02
Photochemical Ozone Creation Potential (kg O <sub>3</sub> eq.)	5.90E-02	6.54E-02
Abiotic Resource Depletion Potential Fossil Fuels (MJ, LHV)	8.02E-01	9.38E-01

For over a century, sustainable practices have naturally been an inherent part of our business at USG and CGC. Today, they help shape the innovative products that become the homes where we live, the buildings where we work and the arenas where we play. From the product formulations we choose, to the processes we employ, USG and CGC are committed to designing, manufacturing, and distributing products that minimize overall environmental impacts and contribute toward a healthier living space. We believe that transparency of product information is essential for our stakeholders and Environmental Product Declarations (EPDs) are the next step toward an even more transparent USG and CGC. For additional information, visit [usg.com](http://usg.com), [cgcinc.com](http://cgcinc.com) and [usg.ecomedes.com](http://usg.ecomedes.com).



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



This declaration is an Environmental Product Declaration (EPD) in accordance with ISO 14025 and ISO 21930: 2017. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.

DECLARATION NUMBER	EPD 410	
PROGRAM OPERATOR	ASTM International – 100 Barr Harbor Drive, West Conshohocken, PA USA www.astm.org	
DECLARATION HOLDER	USG Corporation - 550 W. Adams St., Chicago, IL USA	
DECLARED PRODUCT	Umbral™ Direct Mount Panels	
REFERENCE PCR	UL Environment: PCR Guidance for Building-Related Products and Services; Part B: Non-Metal Ceiling Panel EPD Requirements; April 13, 2021	
DATE OF ISSUE	12/16/22	
PERIOD OF VALIDITY	5 Years	
CONTENTS OF THE DECLARATION	This EPD is complete and contains the following: <ul style="list-style-type: none"> <li>• Product System Documentation</li> <li>• Life Cycle Calculation Rules</li> <li>• Life Cycle Assessment Results</li> <li>• Further Information</li> <li>• References</li> </ul>	
This declaration was independently verified in accordance with ISO 14025 and ISO 21930:2017 <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	Tim Brooke, ASTM International	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	Thomas P. Gloria, Industrial Ecology Consultants	



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 1. Product System Documentation

#### 1.1 Product Description and Product Identification

Umbral™ Direct Mount Panels are manufactured using a unique process that maximizes sound and anti-sag performance, producing excellent noise reduction coefficient and solid ceiling attenuation class (CAC) performance.

The Umbral™ Direct Mount Panels consist of a latex/starch-bound mineral wool basemat laminated with a non-woven veil. These panels are available in three finishes: white, black and a field applied coating. These products generally fall under ASTM E1264 Section 5.2 designation as Type III—Mineral base with membrane-faced overlay or 5.2.11 Type XI—Mineral base with fabric-faced overlay. This EPD covers the following products (Item Numbers: 22566.50, 22566.205, 22566.99).

#### 1.2 Designated Application

The products covered by this EPD are designed to be installed directly to a deck using hat channel and fasteners.

#### 1.3 Product Technical Data

Table 1: Summary of the technical data

NAME	TEST METHOD	UMBRAL™ DIRECT MOUNT PANELS
Noise Reduction Coefficient (NRC)	C423 in D-20 mount per E795	0.75
Articulation Class (AC)	E1111 and Classification E1110	N/A
Ceiling Attenuation Class (CAC)	E1414 and Classification E413	N/A
Fire Rating	E84	Class A
Light Reflection	E1477	0.90 (flat white only)



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 1.4 Placing on the Market/Application Rules

Acoustical ceiling panels must be installed and maintained in accordance with current USG written instructions and best industry practice, including the CISCA Handbook.

### 1.5 Delivery Status

Umbral™ Direct Mount Panels arrive at the jobsite in a shrink-wrapped wrap-around carton.


### 1.6 Product Composition

Table 2: Product specifications and formula

MATERIAL	UMBRAL™ DIRECT MOUNT PANELS
Basemat	86.9%
Adhesive	0.9%
Veil	2.8%
Dry coating	9.4%
<b>Sum</b>	<b>100%</b>

### 1.7 Product Manufacture

In wet-formed mineral fiber production, the tile ingredients are mixed into a dilute slurry, which is then formed onto a wire as a basemat. The base mats are then pressed and dried. The dried tiles are optionally laminated, cut or trimmed into the appropriate sizes and painted. Painting may involve two or more coatings with a drying cycle between coatings. After inspection, the ceiling tiles are packaged for shipment. Panel trim and panels that are chipped or broken during manufacturing (referred to as “broke”) are recycled and returned to the process. The finishing unit processes are dominated by the use of water-based paint, which contains ingredients such as calcium carbonate, clay, latex, titanium dioxide (TiO<sub>2</sub>) and other chemicals. Shrink-wrap and corrugated strip are used as packing materials.

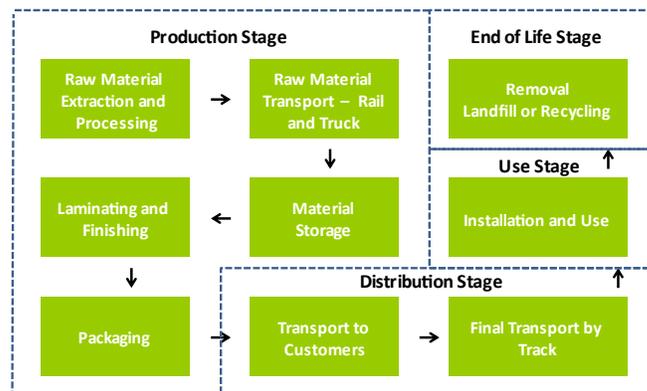

ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 1.8 Environment and Health During Manufacturing

USG and CGC have led the building sector's effort in developing and supplying sustainable construction materials. Today, sustainability is integrated into the design and manufacture of every wall, ceiling, and flooring product. As both a producer and a buyer of raw materials, we have a responsibility to extensively review and select each material we use. Each decision we make is based on careful consideration of environmental and safety effects over time. Raw materials used in our products are carefully selected and go through a screening procedure. Incoming raw materials are tested for contaminants by an internal lab and third-party labs for consideration of use and worker, environmental, and end-user exposure. This due diligence helps to ensure our products are safe to handle in our manufacturing plants and on job sites while having minimal impact on occupant health and indoor and outdoor environments.

### 1.9 Packaging

USG Interiors ceiling panels are packaged using cardboard sleeves and are then wrapped in plastic shrink wrap. USG encourages the proper recycling of these packaging materials. Both the production and disposal of these packaging materials was modeled in this study.

### 1.10 Conditions of Use

To ensure the longevity of the product, panels should not be exposed to moisture, high humidity, or high temperature. Criteria can be found in the USG warranty information specific to each product.

### 1.11 Distribution

The default transport distances from the PCR (product transport from the point of manufacture to building site) of 497 miles (800 km) by truck were used in this analysis. Final transportation from the building site to waste processing was defaulted to 22 miles (35 km) by truck.

### 1.12 Product Installation

The ceiling panels must be installed in accordance with all applicable USG Interiors installation guidelines. Approved installation procedures are provided in the Ceiling Systems Handbook published by the Ceiling and Interior Systems Construction Association and must be followed. Installation of USG's ceiling and grid products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite.

### 1.13 Environment and Health During Use Stage

This product is not expected to produce any unusual hazards during normal use. Exposure to high dust levels may irritate the skin, eyes, nose, throat, or upper respiratory tract. Proper personal protective gear should be worn by installer for protection.

### 1.14 Reference Service Life

A default RSL of 75 years shall be assumed for the product and ceiling panel mounting system. An assumed Estimated Service Life (ESL) of 75 years shall be used for building life.



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 1.15 Re-Use Phase

With proper care, ceiling panels may be reused at the end of a building's life.

### 1.16 End-of-Life Disposal

USG is helping to meet the needs of a growing world and preserve natural resources by taking back approved ceiling panels from any manufacturer and recycling them into new building products. While USG encourages recycling of its ceiling panels through its take back program, all ceiling panel waste generated during installation and at end-of-life is assumed to be disposed of in an appropriate landfill.

### 1.17 Extraordinary Effects

#### Fire

All ceiling products covered by this EPD are certified to be Class A (flame spread of 25 or less, smoke developed of 50 or less per ASTM C84).

#### Water

The ceiling panel should not come into contact with moisture because of a leaking roof, a sweating pipe, a leaking radiator, a flood, condensation on windows, condensation on more subtle surfaces where dew points are reached, humidified air from the HVAC system or any other similar causes.

#### Mechanical Destruction

The product must be installed and maintained in accordance with current USG written instructions and best industry practice, including the CISCA Handbook and ASTM C636, "Standard Practice for Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-In Panels."



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



## 2. LCA Calculation Rules

### 2.1 Functional Unit


The declared unit for ceiling panels is defined as one square meter with optional reporting of one square foot (12"x12") of ceiling panel.

**Table 3: Functional unit**

NAME	UMBRAL™ DIRECT MOUNT PANELS (METRIC)	UMBRAL™ DIRECT MOUNT PANELS (STANDARD)
Declared Unit	0.093 m <sup>2</sup>	1 ft <sup>2</sup>
Declared Thickness	1.84 cm	0.726 in
Density	253 kg/m <sup>3</sup>	15.8 pcf
Surface weight per declared unit	4.66 kg/m <sup>2</sup>	0.956 lb./ft <sup>2</sup>

### 2.2 System Boundary

This EPD represents a “cradle-to-grave” LCA analysis for wet-formed mineral fiber ceiling panels. It covers all the production steps from raw material extraction (i.e., the cradle) to end of life disposal (grave).

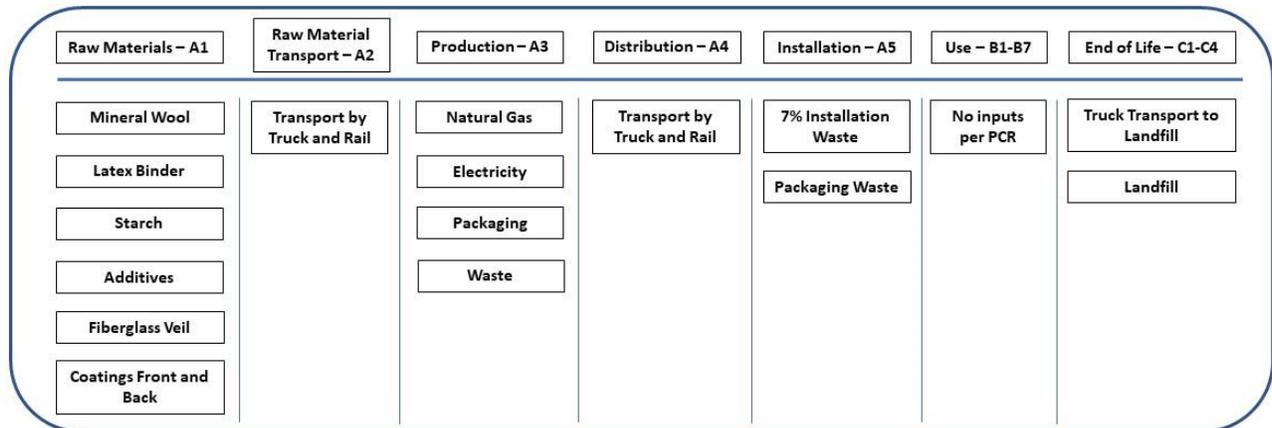

**Figure 1: Specific processes covered by this EPD by life cycle stage**



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 2.3 Estimates and Assumptions

In the case of the ceiling panel production at the Cloquet, MN plant, data collection of energy and raw material inputs were aided by the presence of an extensive computer monitoring system which tracked product formulas by product type. All wet-formed mineral fiber ceiling product raw material and energy inputs are specific to the specific wet-formed mineral fiber product produced at the Cloquet, MN plant.

Additional data limitations include the use of proxy processes rather than actual supplier generated primary data. This would include such processes as starch, which is representative of wet-milled corn starch but may not necessarily be representative of USG's particular starch supplier. In addition, the data is limited in that the primary data was collected during the 2020 year and changes in operations may increase/decrease impacts in the future. Other data limitations include the use of secondary data sets instead of primary data for upstream and downstream processes, local impacts vs. global impacts, possible impacts vs. actual impacts, inherent uncertainty in the data sets, accuracy and precision of impact assessment methodology, etc.

### 2.4 Cut-off Criteria

The All inputs and outputs to a (unit) process were included in the calculation for which data is available.

In case of insufficient input data or data gaps for a unit process, the cut-off criteria was 1% of renewable and non-renewable primary energy usage and 1% of the total mass of that unit process. The total neglected input flows did not exceed 5% of energy usage and mass.

### 2.5 Background Data

All background was sourced from critically reviewed GaBi databases.

### 2.6 Data Requirements and Data Sources

The LCA model was created using the GaBi software from Sphera. Specific comments related to data quality requirements cited in ISO 14025 Section 4.2.3.6.2 include the following.

**Temporal:** In the case of wet-formed mineral fiber ceiling tile production, the LCI data was collected from the Cloquet, MN plant for the 2020 production year.

**Geographical:** Where possible, all processes were chosen as being representative of US manufacturing processes.

**Technical:** The data selected for this study is specific to the technology used in the preparation of the various raw materials.

**Precision:** The raw material usage amounts were derived from plant quality data on finished products, coatings usage plant data and product formulas.

**Completeness:** Virtually all the significant raw material flows (> 99%) in wet-formed mineral fiber ceiling panel production has been modeled. The exception consists of transportation of the coating raw materials; the effect of which was determined to be less than 1% of the total.

**Representative:** Where possible all the data sets were selected to be representative of US-based production, are less than 10 years in age and are representative of the technology being employed.



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



**Consistency:** All the manufacturing processes were modeled in a consistent manner throughout this study in accordance with the goal and scope definitions.

**Reproducibility:** The information contained in this study, including raw material, energy and transportation distance inputs, have been fully documented in the LCA report.

**Sources of Data:** The sources for the processes used in this study have been fully provided in the LCA report and are representative of the material and energy sources used in actual production.

**Uncertainty:** The relative uncertainty associated with this study has been minimized. No significant assumptions have been made.

### 2.7 Period Under Review

All raw material and energy inputs are for the 2020 calendar year.

### 2.8 Allocation

The LCI data was collected for the Cloquet ceiling tile production plant for the 2020 production year. Raw material inputs are specific to these panels and energy inputs were allocated based on the mass of these panels.

### 2.9 Comparability

A comparison or evaluation of EPD data is only possible if all data sets to be compared are 1) created according to EN 15804 and 2) are considered in a whole building context or utilize identical defined use stage scenarios. Comparisons are only allowable when EPDs report cradle-to-grave information using a functional unit. Refer to section 5.3 of EN 15804 for further information. Comparison of the environmental performance of ceiling panels using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under this PCR. Full conformance with the PCR for North American Ceiling Panels allows EPD comparability only when all stages of a ceiling panel life cycle have been considered. However, variations and deviations are possible.



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 3. LCA: Scenarios and additional technical information

**Table 1. Transport to the building site (A4)**

NAME	VALUE	UNIT
Fuel type	Diesel	-
Liters of fuel	1.28E-03	l/100km
Vehicle type	US Truck	-
Transport distance	800	km
Capacity	0.67	
Gross density of products transported	253	kg/m <sup>3</sup>

**Table 2. Installation into the building (A5)**

NAME	VALUE	UNIT
Ancillary materials	0	kg
Net freshwater consumption specified by water source and fate	0	m <sup>3</sup>
Other resources	0	kg
Electricity consumption	0	kWh
Other energy carriers	0	MJ
Material loss	7	%
Ceiling Panel Mounting System (CPMS)	NA	kg/MSF
Output substances following waste treatment on site	7% of delivered weight	%
Dust in the air	~ 0	kg
VOC content	< 9	µg/m <sup>3</sup>

**Table 3. Use or application of the installed product (B1)**

NAME	VALUE	UNIT
RSL	75	years
VOC	< 9	µg/m <sup>3</sup>



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



**Table 4. Maintenance (B2)**

NAME	VALUE	UNIT
Maintenance process information	As required by the PCR, a standard Life expectancy for ceiling panels based on historic practices of 75 years shall be used. No maintenance is required.	
Maintenance cycle	0	Number/ RSL
Maintenance cycle	0	Number/ ESL
Water consumption	0	m <sup>3</sup>
Auxiliary	0	kg
Other resources	0	kg
Electricity consumption	0	kWh
Other energy carriers	0	MJ
Material loss	0	kg

**Table 5. End of Life (C1-C4)**

NAME		UMBRAL™ DIRECT MOUNT PANELS	UNIT
Collection process (specified by type)	Collected separately	0	kg
	Collected with mixed construction waste	434	kg/MSF
Recovery (specified by type)	Reuse	0	kg
	Recycling	0	kg
	Landfill	434	kg/MSF
	Incineration	0	kg
	Incineration with energy recovery	0	kg
	Energy conversion efficiency rate	0	-
Disposal	Product or material for final deposition	434	kg/MSF
Removals of biogenic carbon (excluding packaging)		55	kg CO <sub>2</sub>



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### 4. Life Cycle Assessment Results

Product stage				Construction process stage				Use stage				End of life stage			
Raw Material Supply	Transport	Manufacturing	Transport	Construction-Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational water Use	De-construction Demolition	Transport	Waste processing	Disposal
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

Figure 2: System Boundary

The Life Cycle Impact Assessment Results presented below are the results of Umbral™ Direct Mount Panels.

#### 4.1 Life Cycle Impact Assessment Results

Life Cycle Environmental Impact Results for 1 Square Foot of Umbral™ Direct Mount Panels (Field Applied Coating)										
North American LCA Environmental Impact Results		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact								
Global warming	kg CO2 eq.	3.72E-01	2.91E-02	3.13E-02	0.00E+00	0.00E+00	1.21E-03	0.00E+00	6.36E-03	4.40E-01
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	4.50E-02	5.73E-17	3.38E-03	0.00E+00	0.00E+00	2.29E-18	0.00E+00	3.10E-16	4.83E-02
Acidification Potential	kg SO2 eq.	4.57E-02	4.34E-05	3.45E-03	0.00E+00	0.00E+00	3.42E-06	0.00E+00	3.94E-05	4.92E-02
Eutrophication Potential (EP)	kg N eq.	4.50E-02	6.31E-06	3.39E-03	0.00E+00	0.00E+00	3.60E-07	0.00E+00	1.69E-06	4.84E-02
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	5.64E-02	9.73E-04	4.41E-03	0.00E+00	0.00E+00	7.80E-05	0.00E+00	7.46E-04	6.26E-02
Abiotic Depletion Potential (ADP) fossil fuels	MJ surplus energy	7.35E-01	5.65E-02	6.15E-02	0.00E+00	0.00E+00	2.26E-03	0.00E+00	1.06E-02	8.66E-01



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



### Life Cycle Environmental Impact Results for 1 Square Foot of Umbral™ Direct Mount Panels (White)

North American LCA Environmental Impact Results		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact								
Global warming	kg CO2 eq.	4.01E-01	2.91E-02	3.34E-02	0.00E+00	0.00E+00	1.21E-03	0.00E+00	6.36E-03	4.71E-01
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	4.50E-02	5.73E-17	3.38E-03	0.00E+00	0.00E+00	2.29E-18	0.00E+00	3.10E-16	4.83E-02
Acidification Potential	kg SO2 eq.	4.58E-02	4.34E-05	3.46E-03	0.00E+00	0.00E+00	3.42E-06	0.00E+00	3.94E-05	4.94E-02
Eutrophication Potential (EP)	kg N eq.	4.51E-02	6.31E-06	3.39E-03	0.00E+00	0.00E+00	3.60E-07	0.00E+00	1.69E-06	4.85E-02
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	5.90E-02	9.73E-04	4.61E-03	0.00E+00	0.00E+00	7.80E-05	0.00E+00	7.46E-04	6.54E-02
Abiotic Depletion Potential (ADP) fossil fuels	MJ surplus energy	8.02E-01	5.65E-02	6.65E-02	0.00E+00	0.00E+00	2.26E-03	0.00E+00	1.06E-02	9.38E-01

### Life Cycle Environmental Impact Results for 1 Square Foot of Umbral™ Direct Mount Panels (Black)

North American LCA Environmental Impact Results		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact								
Global warming	kg CO2 eq.	3.90E-01	2.91E-02	3.26E-02	0.00E+00	0.00E+00	1.21E-03	0.00E+00	6.36E-03	4.60E-01
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	4.50E-02	5.73E-17	3.38E-03	0.00E+00	0.00E+00	2.29E-18	0.00E+00	3.10E-16	4.83E-02
Acidification Potential	kg SO2 eq.	4.58E-02	4.34E-05	3.46E-03	0.00E+00	0.00E+00	3.42E-06	0.00E+00	3.94E-05	4.93E-02
Eutrophication Potential (EP)	kg N eq.	4.51E-02	6.31E-06	3.39E-03	0.00E+00	0.00E+00	3.60E-07	0.00E+00	1.69E-06	4.85E-02
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	5.86E-02	9.73E-04	4.58E-03	0.00E+00	0.00E+00	7.80E-05	0.00E+00	7.46E-04	6.50E-02
Abiotic Depletion Potential (ADP) fossil fuels	MJ surplus energy	7.71E-01	5.65E-02	6.42E-02	0.00E+00	0.00E+00	2.26E-03	0.00E+00	1.06E-02	9.05E-01

### Resource and Waste Flows for 1 Square Foot of Umbral™ Direct Mount Panels (Field Applied Coating)

Use of Primary Resources		Units	Stage								
			A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV		7.44E-01	1.66E-02	5.87E-02	0.00E+00	0.00E+00	6.63E-04	0.00E+00	1.28E-02	8.33E-01
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV		7.77E+00	4.27E-01	6.31E-01	0.00E+00	0.00E+00	1.70E-02	0.00E+00	8.49E-02	8.93E+00
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>											
Secondary Material (SM)	kg		3.30E-01	0.00E+00	2.31E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.53E-01
Renewable Secondary Fuel (RSF)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3		3.53E-03	5.96E-05	2.73E-04	0.00E+00	0.00E+00	2.38E-06	0.00E+00	2.15E-05	3.89E-03
<b>Additional inventory parameters for transparency</b>											
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.		-5.54E-02	0.00E+00	4.17E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.13E-02	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.		-1.73E-02	0.00E+00	1.73E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.		7.17E-05	2.12E-05	8.41E-06	0.00E+00	0.00E+00	8.49E-07	0.00E+00	1.19E-05	1.14E-04
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>											
Hazardous waste disposed	kg		7.94E-07	1.77E-12	5.97E-08	0.00E+00	0.00E+00	7.09E-14	0.00E+00	4.36E-12	8.54E-07
Non-hazardous waste disposed	kg		9.11E-02	3.67E-05	4.54E-02	0.00E+00	0.00E+00	1.47E-06	0.00E+00	4.34E-01	5.71E-01
High-level radioactive waste	kg		2.98E-05	1.18E-06	2.44E-06	0.00E+00	0.00E+00	4.73E-08	0.00E+00	9.29E-07	3.44E-05
Intermediate and low-level waste	kg		NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>											
Components for re-use (CRU)	kg		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV		0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



Resource and Waste Flows for 1 Square Foot of Umbral™ Direct Mount Panels (White)										
Use of Primary Resources	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	7.66E-01	1.66E-02	6.03E-02	0.00E+00	0.00E+00	6.63E-04	0.00E+00	1.28E-02	8.56E-01
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	8.24E+00	4.27E-01	6.67E-01	0.00E+00	0.00E+00	1.70E-02	0.00E+00	8.49E-02	9.43E+00
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>										
Secondary Material (SM)	kg	3.22E-01	0.00E+00	2.25E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.45E-01
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	3.54E-03	5.96E-05	2.74E-04	0.00E+00	0.00E+00	2.38E-06	0.00E+00	2.15E-05	3.90E-03
<b>Additional inventory parameters for transparency</b>										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	-5.42E-02	0.00E+00	4.08E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.02E-02	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	-1.73E-02	0.00E+00	1.73E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	8.73E-05	2.12E-05	9.58E-06	0.00E+00	0.00E+00	8.49E-07	0.00E+00	1.19E-05	1.31E-04
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>										
Hazardous waste disposed	kg	7.94E-07	1.77E-12	5.98E-08	0.00E+00	0.00E+00	7.09E-14	0.00E+00	4.36E-12	8.54E-07
Non-hazardous waste disposed	kg	9.25E-02	3.67E-05	4.55E-02	0.00E+00	0.00E+00	1.47E-06	0.00E+00	4.34E-01	5.72E-01
High-level radioactive waste	kg	3.56E-05	1.18E-06	2.87E-06	0.00E+00	0.00E+00	4.73E-08	0.00E+00	9.29E-07	4.06E-05
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



Resource and Waste Flows for 1 Square Foot of Umbral™ Direct Mount Panels (Black)										
Use of Primary Resources	Units	Stage								
		A1-C4	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	7.50E-01	1.66E-02	5.91E-02	0.00E+00	0.00E+00	6.63E-04	0.00E+00	1.28E-02	8.39E-01
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	8.00E+00	4.27E-01	6.49E-01	0.00E+00	0.00E+00	1.70E-02	0.00E+00	8.49E-02	9.18E+00
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>										
Secondary Material (SM)	kg	3.24E-01	0.00E+00	2.27E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.47E-01
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	3.51E-03	5.96E-05	2.71E-04	0.00E+00	0.00E+00	2.38E-06	0.00E+00	2.15E-05	3.86E-03
<b>Additional inventory parameters for transparency</b>										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	-5.46E-02	0.00E+00	4.11E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.05E-02	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	-1.73E-02	0.00E+00	1.73E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	8.52E-05	2.12E-05	9.42E-06	0.00E+00	0.00E+00	8.49E-07	0.00E+00	1.19E-05	1.29E-04
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>										
Hazardous waste disposed	kg	7.94E-07	1.77E-12	5.97E-08	0.00E+00	0.00E+00	7.09E-14	0.00E+00	4.36E-12	8.54E-07
Non-hazardous waste disposed	kg	8.97E-02	3.67E-05	4.53E-02	0.00E+00	0.00E+00	1.47E-06	0.00E+00	4.34E-01	5.69E-01
High-level radioactive waste	kg	3.00E-05	1.18E-06	2.45E-06	0.00E+00	0.00E+00	4.73E-08	0.00E+00	9.29E-07	3.46E-05
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels


Cloquet, MN



### 5. LCA Interpretation

The LCA results for the production of Umbral™ Direct Mount Panels were dominated by energy usage; primarily gas usage during the drying process. Drying energy was the key input influencing the LCA measures.

**Figure 3: Process Dominance Analysis for GWP to produce 1 Square Foot of Umbral™ Direct Mount Panels**

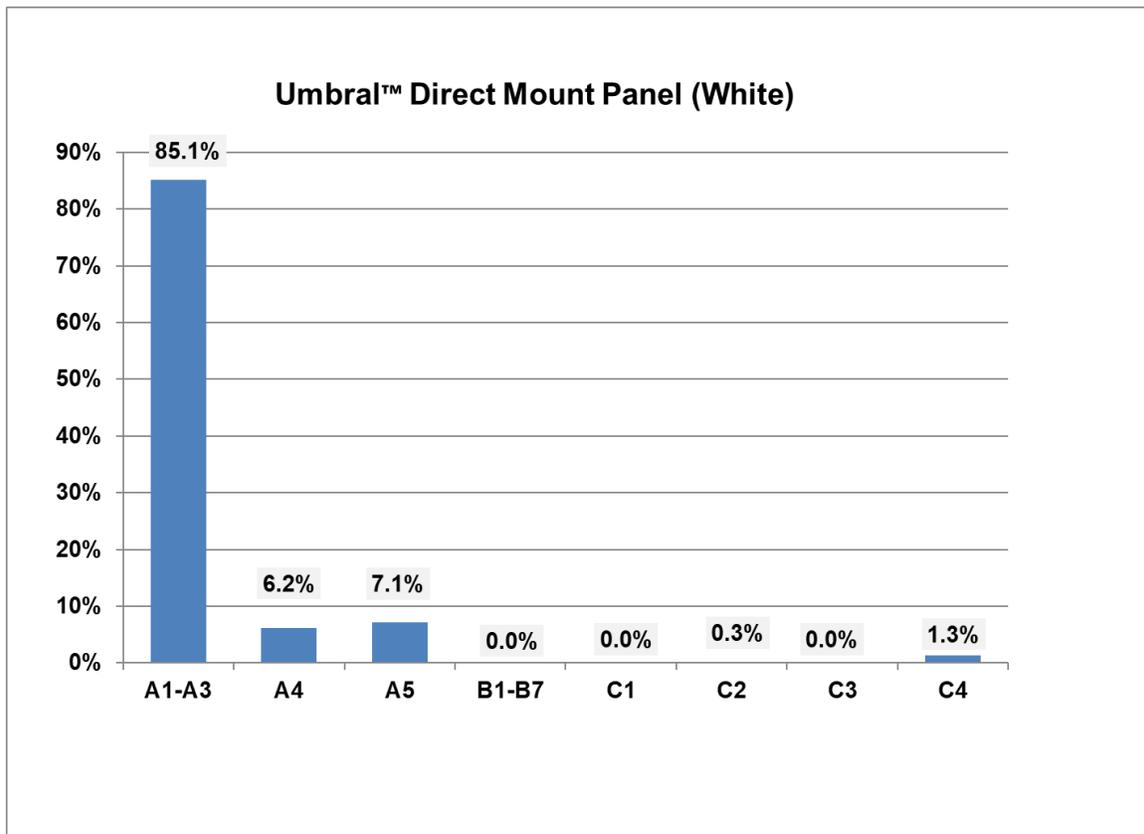

ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## Umbral™ Direct Mount Panels

Cloquet, MN



## 6. References

---

### LCA Report

A Cradle-to-Gate and A Cradle-to-Grave Life Cycle Assessment of USG Umbral™ Direct Mount Panels, 12/7/22. USG (Confidential)

### Product PCR

PCR for Building-Related Products and Services - Part A: Calculation Rules for the LCA and Requirements Project Report, (IBU/UL Environment document number 10010, revision V3.2, December 2018)

UL Environment: PCR Guidance for Building-Related Products and Services; Part B: Non-Metal Ceiling and Interior Wall Panel EPD Requirements; v2.0 April 13, 2021

ASTM International General Program instructions, v8.0, April 29, 2020.

### Sustainability Reporting Standards

EN 15804:2012-04 - Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction product

ISO 14025:2006 - Environmental labels and declarations — Type III environmental declarations — Principles and procedures

ISO 14040:2006/Amendment 1:2020 - Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2006/amendment 2: 2020 - Environmental management – Life cycle assessment – Requirements and guidelines

ISO 14046:2013 - Environmental management- Water footprint- Principles, requirements and guidelines

ISO 15392:2008 - Sustainability in building construction- General principles

ISO 15686-1:2011 - Buildings and constructed assets- Service life planning- Part 1: General principles

ISO 15686-2:2008 - Buildings and constructed assets- Service life planning Part 2: Service life prediction procedures

ISO 15686-7:2008 - Buildings and constructed assets- Service life planning Part 7: Performance evaluation for feedback of service life data from practice

ISO 15686-8:2008 - Buildings and constructed assets- Service life planning Part 8: Reference service life and service life estimation

ISO 21930:2017 - Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014