

ADOÇİM[®]

Türkiye Artova Cement Plant

Inclusive of transportation to Titan Florida (Tampa, FL); Roanoke Cement Company (Norfolk, VA); and Essex Cement Company (Newark, NJ)

An Environmental Product Declaration



ASTM INTERNATIONAL
Helping our world work better

About this EPD

This is a Type III environmental product declaration (EPD) for Type IL cement as produced by Adoçım Çimento Beton San. A.Ş. (Adoçım) at its Artova plant located in Türkiye, inclusive of transportation to three ports on the Atlantic coast of the continental US. The results of the underlying LCA are computed using the North American (N.A.) version of the Global Cement and Concrete Association (GCCA) Industry EPD Tool for cement and concrete [1]. This tool and the underlying LCA model and database [2] have been previously verified to conform to the prevailing sub-product category rule (PCR) [3], ISO 21930:2017 (the core PCR) [4] as well as ISO 14020:2000 [5] and ISO 14040/44:2006 LCA standards [7], [8].

This EPD is certified by ASTM to conform to the sub-Product Category Rule (PCR) referenced above [3], as well as to the requirements of ISO 14020, ISO 14025 [6], ISO 21930 and ASTM International's General Program Instructions [9]. This EPD is intended for business-to-business audiences.

General Summary

EPD Commissioner and Owner



Adoçım Çimento Beton San. A.Ş.

Beybi Giz Plaza No:1 Floor 13

Maslak, İstanbul, Türkiye

<https://www.adocim.com/>

Adoçım company personnel provided LCI and meta data for the 2023 reference year in support of this EPD. Adocim is a member of Titan Cement Group.

The owner of the declaration is liable for the underlying information and evidence.

Product Group and Name

Cement, UN CPC 3744.

Product Definition

Blended cement is a hydraulic cement consisting of two or more inorganic constituents (at least one of which is not portland cement or portland cement clinker) which separately or in combination contribute to the strength gaining properties of the cement, (made with or without other constituents, processing additions and functional additions, by intergrinding or other blending).

- Type IL (ASTM C595) — is a portland-limestone cement and is a hydraulic cement in which the limestone content is more than 5 % but less than or equal to 15 % by mass of the blended cement.

Product Category Rules (PCR)

NSF International, Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021 [3].

Date of Issue & Validity Period

April 26, 2024 – 5 years

Declared Unit

1 metric ton of cement



EPD and Project Report Information

Program Operator	ASTM International	
Declaration Number	EPD 670	
Declaration Type	Cradle-to-gate (modules A1 to A3). Facility and product-specific.	
Applicable Countries	United States	
Product Applicability	Portland cement is the basic ingredient of concrete. Concrete, one of the most widely used construction materials in the world, is formed when portland cement creates a paste with water that binds with sand and rock to harden.	
Content of the Declaration	This declaration follows Section 9; Content of an EPD, NSF International, Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021 [3].	
This EPD was independently verified by ASTM in accordance with ISO 14025 and the reference PCR:	Tim Brooke ASTM International 100 Barr Harbor Drive PO Box C700 West Conshohocken PA 19428-2959, USA cert@astm.org	Thomas P. Gloria, Ph. D. Industrial Ecology Consultants 35 Bracebridge Rd. Newton, MA
Internal	<u>External</u> X	
Notes	The EPD results reported herein are computed using the N.A. GCCA Industry EPD tool for Cement and Concrete (https://concrete-epd-tool.org) [1].	

EPD Prepared by:



Athena
Sustainable Materials
Institute

Kevin Garrahan and Jamie Meil
 Athena Sustainable Materials Institute
 280 Albert Street, Suite 404
 Ottawa, Ontario, Canada K1P 5G8
info@athenasmi.org
www.athenasmi.org

PCR Information

Program Operator	NSF International
Reference PCR	Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021 [3].
PCR review was conducted by:	Thomas P. Gloria, PhD (Chair), Industrial Ecology Consultants, Mr. Jack Geibig, EcoForm Mr. Bill Stough, Sustainable Research Group

Adoçim Cement & Production Facilities

Adoçim exports Type IL cement from one cement plant located in Artova Türkiye to various US ports along the Atlantic coast where Titam Cement Group operates terminals serving the US east coast. This particular EPD pertains to Type IL cement produced at Adoçim's Artova plant and shipped to three terminals operated by Titan Cement Group:

1. Essex Cement Company – port of Newark, NJ
2. Roanoke Cement Company – port of Chesapeake Bay, VA (Norfolk, VA)
3. Titan Florida – port of Tampa, FL.

The Artova plant utilizes efficient preheat, precalciner kiln technology. Adoçim provides all logistics for cement delivery, with the customers responsible for off-loading of the bulk cement.

Product Description

This EPD reports environmental transparency information for Type IL cement. Cements are hydraulic binders and are manufactured by grinding cement clinker and other constituents into a finely ground, usually grey colored mineral powder. When mixed with water, cement acts as a glue to bind together the sand, gravel or crushed stone to form concrete, one of the most durable, resilient and widely used construction materials in the world.

Products and Standards

The Artova plant's Type IL cement is comparable in make-up to similar products available on the US market and complies with the following standard:

ASTM C595 / C595M –Standard Specification for Blended Hydraulic Cement [13]


Declared Unit

The declared unit is one metric ton of cement.



System Boundary

This is a cradle-to-gate EPD covering the production stage (A1-A3) as depicted in the figure below; inclusive of transport to three cement import ports. The production stage includes extraction of raw materials (cradle) through the manufacture and transport of cements ready for shipment (gate). Transportation reflects mode and distances from the Artova plant to the Turkish export port (Samsun) and bulk carrier delivery to three US port destinations. Cement off-loading is the responsibility of the receiving customer and as such, off-loading effects are excluded from this EPD.

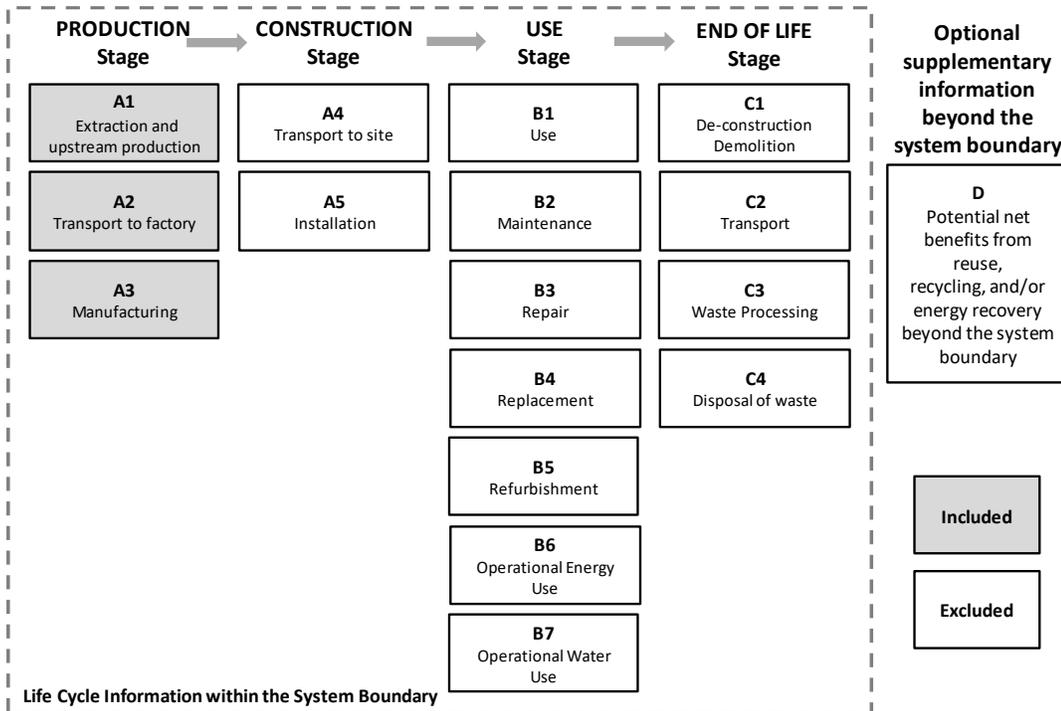

Items **excluded** from the system boundary include:

- Production, manufacture, and construction of manufacturing capital goods and infrastructure
- Production and manufacture of production equipment, delivery vehicles, and laboratory equipment
- Personnel-related activities (travel, furniture, and office supplies)
- Energy and water use related to company management and sales activities that may be located either within the factory site or at another location

Cut-off Criteria

The cut-off criteria per NSF PCR, Section 7.1.8 [3] and ISO 21930, 7.1.8 [4] were followed. Per ISO 21930, 7.1.8, all input/output data required were collected and included in the LCI modelling. No substances with hazardous and toxic properties that pose a concern for human health and/or the environment were identified in the framework of this EPD

Data Collection

Gate-to-gate input/output flow data was collected for the following processes for the reference year 2023:

- Limestone quarry operations, clinker production and cement manufacture.
- Transport mode and distance from the Artova plant to port of Samsun (truck), port of Samsun to US ports (bulk carrier). Bulk cement off-loading is the responsibility of the receiving customer.



Allocation Rules

Allocation of inventory flows and subsequently environmental impact is relevant when assets are shared between product systems. The allocation method prescribed by the PCR [3] is applied in the underlying LCA model. The sub-category PCR recognizes fly ash, furnace bottom ash, bypass dust, mill scale, polluted soils, spent catalyst, aluminum oxide waste, silica fume, granulated blast furnace slag, iron rich waste, cement kiln dust (CKD), flue gas desulfurization (FGD) gypsum, calcium fluoride rich waste and postconsumer gypsum as recovered materials and thus, the environmental impacts allocated to these materials are limited to the treatment and transportation required to use as a cement material input. Further, used tires, plastics, solvents, used oil and oily waste, coal/carbon waste, roofing asphalt, household refuse-derived waste, non-hazardous liquid waste, industrial sludge, and agricultural waste are considered non-renewable and/or renewable secondary fuels. Only the materials, water, energy, emissions, and other elemental flows associated with reprocessing, handling, sorting and transportation from the point of the generating industrial process to their use in the production process are considered. All emissions from combustion at the point of use are considered. For co-products, no credit is considered, and no allocation is applied. See the LCA model and LCA database reports of GCCA's Industry Tool for EPDs of cement and concrete for more information [1], [2].

Data Quality Requirements and Assessment

Data Quality Requirements	Description
Technology Coverage	Data represents the prevailing technology in use at the Artova Cement plant in Türkiye. Whenever available, for all upstream and core material and processes, both International and North American typical or global average industry LCI datasets were utilized. The Artova cement plant utilizes <i>preheater and precalciner</i> kiln technology. <i>Technological representativeness is characterized as "high"</i> .
Geographic Coverage	The geographic region considered is Global. <i>Geographical representativeness is characterized as "high"</i> .
Time Coverage	Activity (primary) data are representative of 2023 calendar years (12 months) and includes the following: <ul style="list-style-type: none"> - Plant limestone quarrying, - Plant clinker production, - Plant Type IL cement manufacturing, - In-bound/out-bound transportation data - cement manufacturing plant and transport to three ports on the Atlantic seaboard of the continental US. <i>Temporal representativeness is characterized as "high"</i> .
Completeness	All relevant, specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled in the GCCA Tool to complete the production (inclusive of outbound transport) profile for Type IL cement. The completeness of the foreground process chain in terms of process steps was rigorously assessed.
Consistency	To ensure consistency, cross checks of the material and energy inputs against the PCA Industry Average for portland-limestone cement was conducted [16].
Reproducibility	External reproducibility is not possible as the source LCI data and subsequent LCA background reports are confidential.
Transparency	Activity datasets are disclosed in the project LCI compilation and the background reports generated by the GCCA Tool.
Uncertainty	A <i>sensitivity check</i> was conducted relative to the PCA industry average [16]. The variation across significant inputs were found to be well within the expected range and hence, there is high degree of confidence in the results.

Life Cycle Impact Assessment Results: Adoçim Artova Plant to Import Terminals

This section summarizes the production stage life cycle impact assessment (LCIA) results including resource use and waste generated metrics based on the cradle-to-gate life cycle inventory inputs and outputs analysis. The results are calculated based on 1 metric ton of each cement type as produced at the two plants inclusive of transportation to each cement customer port.

It should be noted that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks [4], [8]. Further, many LCA impact categories and inventory items are still emerging or under development and can have high levels of uncertainty that preclude international acceptance pending further development. Use caution when interpreting results for these categories – identified with an “*” [3].

Only EPDs prepared from cradle-to-grave life-cycle results and based on the same function, quantified by the same functional unit, and taking account of replacement based on the product reference service life (RSL) relative to an assumed building service life, can be used to assist purchasers and users in making informed comparisons between products [3]. Environmental declarations from different programs may not be comparable [6]. EPDs are comparable only if they comply with ISO 21930, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works [3] [4].

Production Stage EPD Results – Per Metric Ton Delivered to Import Terminals

Impact category and inventory indicators	Unit	Tampa, FL Type IL ASTM C595	Norfolk, VA Type IL ASTM C595	Newark, NJ Type IL ASTM C595
Global warming potential, GWP 100, AR5	kg CO ₂ eq	904	894	892
Ozone depletion potential, ODP	kg CFC-11 eq	3.15E-05	2.94E-05	2.90E-05
Smog formation potential, SFP	kg O ₃ eq	45.7	44.2	43.9
Acidification potential, AP	kg SO ₂ eq	3.18	2.97	2.93
Eutrophication potential, EP	kg N eq	1.72	1.66	1.65
Abiotic depletion potential for non-fossil, mineral resources ADP elements*	kg Sb eq	0	0	0
Abiotic depletion potential for fossil resources, ADP fossil*	MJ LHV	4620	4480	4453
Renewable primary resources used as an energy carrier (fuel), RPRE*	MJ LHV	254	250	250
Renewable primary resources with energy content used as material, RPRM*	MJ LHV	0	0	0
Non-renewable primary resources used as an energy carrier (fuel), NRPRE*	MJ LHV	4626	4485	4459
Non-renewable primary resources with energy content used as material, NRPRM*	MJ LHV	0	0	0
Secondary materials, SM*	kg	0	0	0
Renewable secondary fuels, RSF *	MJ LHV	193	193	193
Non-renewable secondary fuels, NRSF *	MJ LHV	421	421	421
Recovered energy, RE*	MJ LHV	0	0	0
Consumption of freshwater, FW*	m ³	1.27	1.23	1.23
Hazardous waste disposed, HWD*	kg	0	0	0
Non-hazardous waste disposed, NHWD *	kg	0	0	0
High-level radioactive waste, conditioned, to final repository, HLRW*	kg	x ¹⁾	x ¹⁾	x ¹⁾
Intermediate and low-level radioactive waste, conditioned, to final repository, ILLRW*	kg	x ¹⁾	x ¹⁾	x ¹⁾
Components for re-use, CRU*	kg	0	0	0
Materials for recycling, MFR*	kg	0.54	0.54	0.54
Materials for energy recovery, MER*	kg	0	0	0
Recovered energy exported from the product system, EE*	MJ LHV	0	0	0

Additional Indicators:

Global warming potential - biogenic, GWP-bio*	kg CO ₂ eq	0.88	0.87	0.86
Emissions from calcination*	kg CO ₂ eq	435	435	435
Emissions from combustion of waste from renewable sources*	kg CO ₂ eq	7.60E-02	7.60E-02	7.60E-02
Emissions from combustion of waste from non-renewable sources*	kg CO ₂ eq	51.7	51.7	51.7

Table Notes:

x¹⁾ – The GCCA EPD Tool does not support these indicators.

* Use caution when interpreting results for these categories

LCA Interpretation

The Manufacturing module (A3) drives most of the potential environmental impacts. Manufacturing impacts are primarily driven by energy use (electricity and thermal fuels) during the pyroprocessing of limestone in the production of clinker. Clinker content in cement similarly defines the relative environmental profile of the final cement product. Transportation (A2) is the second largest contributor to the Production stage EPD results, followed by Raw Material Extraction (A1). It is noted that long distance transport contributes about 85 to 100 kg CO₂ eq to the overall GWP profile of the imported cements.

Additional Environmental Information

No additional environmental information is reported.

References

- [1] Global Cement and Concrete Association (GCCA) and Portland Cement Association (PCA), GCCA Industry EPD Tool for Cement and Concrete (V4.2), User's Manual, North American version, Prepared by Quantis, December 2023. <https://concrete-epd-tool.org/>
- [2] Global Cement and Concrete Association (GCCA) LCA Database, North American version (V4.2), Prepared by Quantis, December 2023. https://concrete-epd-tool.org/assets/GCCA_EPD-Tool_LCA-Database-v4.2_2023-12-18.xlsx
- [3] NSF International, Product Category Rule Environmental Product Declarations, PCR for Portland, Blended, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021.
- [4] ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
- [5] ISO 14020:2000 Environmental labels and declarations — General principles
- [6] ISO 14025:2006 Environmental labeling and declarations - Type III environmental declarations - Principles and procedures.
- [7] ISO 14040:2006/Amd1:2020 Environmental management - Life cycle assessment - Principles and framework.
- [8] ISO 14044:2006/Amd1:2017/Amd2:2020 Environmental management - Life cycle assessment - Requirements and guidelines.
- [9] ASTM General Program Instructions. V.8.0, April 29, 2020.
- [10] NSF International, Product Category Rule Environmental Product Declarations, PCR for Concrete, V2.1, August 2021.
- [11] ASTM C150 / C150M – 20 Standard Specification for Portland Cement.
- [12] API 10a – Specification for Cements and Materials for Well Cementing
- [13] ASTM C595 / C595M - 21 Standard Specification for Blended Hydraulic Cements
- [14] AASHTO M 85-21 Standard Specification for Portland Cement (ASTM Designation: C150/C150M-21)
- [15] WBCSD CSI 2013: CO₂ and Energy Protocol Version 3.1. December 9, 2013. <https://www.cement-co2-protocol.org/en/>
- [16] Portland Cement Association Environmental Product Declaration – Portland-Limestone Cement, ASTM International, March 12, 2021. https://pcr-epd.s3.us-east-2.amazonaws.com/635.EPD_for_PLC_Athena_Final_revised_04082021.pdf