



# A Regionalized Industry Average EPD for Canadian Softwood Lumber

According to ISO 14025:2006 and ISO 21930:2017



**CANADIAN WOOD COUNCIL  
CONSEIL CANADIEN DU BOIS**



## ASTM International Certified Environmental Product Declaration

This is a Canadian regionalized industry wide (average) business-to-business Type III environmental product declaration (EPD) for softwood lumber. This declaration has been prepared in accordance with ISO 21930 (1), ISO 14025 (2), ISO 14040 (3), ISO 14044 (4), the governing product category rules (5), and ASTM General Program Instructions for Type III EPDs (6). The intent of this document is to transparently disclose comprehensive environmental information related to the potential impacts associated with the cradle-to-gate life cycle stages of softwood lumber manufactured in various Canadian provinces and regions.

### EPD Summary

|  |   |  |
|--|---|--|
| <b>Program operator</b>                                      | ASTM International<br>100 Barr Harbor Drive<br>PO Box C700<br>West Conshohocken, PA<br>19428-2959 USA<br><a href="http://www.astm.org">www.astm.org</a> |  <b>ASTM INTERNATIONAL</b><br>Helping our world work better  |
| <b>General program instructions and version</b>              | ASTM Program Operator Rules<br>4/29/2020  |  |
| <b>Declaration owner</b>                                     | Canadian Wood Council<br>99 Bank Street, Suite 420<br>Ottawa, ON<br>K1P 6B9 Canada<br><a href="http://www.cwc.ca">www.cwc.ca</a>                        |  <b>CANADIAN WOOD COUNCIL</b><br>CONSEIL CANADIEN DU BOIS |
| <b>Declaration number</b>                                    | EPD 845   |  |
| <b>Declared product</b>                                      | Softwood lumber produced in Canada  |  |
| <b>Declared unit</b>   | 1 cubic metre of softwood lumber  |  |
| <b>Reference PCR and version</b>                             | UL Environment Part B Structural and Architectural Wood Products EPD Requirements v1.1 2020 (5)   |  |
| <b>Description of product's intended application and use</b> | Building construction (residential and commercial), furniture, mass timber products, and other uses   |  |
| <b>Markets of applicability</b>                              | Construction sector, North America  |  |
| <b>Date of issue</b>   | February 4, 2025  |  |
| <b>Period of validity</b>                                    | Five years  |  |
| <b>EPD type</b>  | Industry average  |  |



|  |  |
|--|--|
| <b>EPD scope</b>   | Cradle to gate   |
| <b>Year of reported manufacturer primary data</b>  | 2022   |
| <b>LCA software</b>  | SimaPro v9.5.0.2 (7)   |
| <b>LCA databases</b>   | USLCI (8), ecoinvent 3.9 (9)   |
| <b>LCIA methodology</b>  | TRACI 2.1 (10), CML Baseline v3.02   |
| <b>Sub-category PCR review was conducted by:</b>   | Thomas P. Gloria, Ph.D.<br>Industrial Ecology Consultants  |
| <b>The LCA was conducted in accordance with ISO 14044 and the reference PCR by:</b>              | <p>Athena Sustainable Materials Institute<br/>280 Albert St, Suite 404<br/>Ottawa, ON K1P 5G8 Canada<br/><a href="mailto:info@athenasmi.org">info@athenasmi.org</a><br/><a href="http://www.athenasmi.org">www.athenasmi.org</a></p>    |
| <b>LCA report</b>  | Athena Sustainable Materials Institute (2024). A Regionalized Industry-average Cradle-to-gate LCA of Canadian Softwood Lumber. National Research Council Canada (11).  |
| <b>The LCA was independently verified in accordance with ISO 14044 and the reference PCR by:</b> | Adam Robertson, M.A.Sc., P.Eng.<br>Sustainatree Consulting<br><a href="mailto:adam@sustainatree.ca">adam@sustainatree.ca</a>   |
| <b>This declaration was independently verified in accordance with ISO 14025 (external)</b>       | Tim Brooke<br>ASTM International<br>100 Barr Harbor Drive, PO Box C700<br>West Conshohocken, PA 19428-2959 USA<br><a href="http://www.astm.org">www.astm.org</a>   |
| <b>Limitations</b>   | Environmental declarations from different programs (ISO 14025) might not be comparable. Comparison of the environmental performance using EPD information shall consider all relevant information modules over the full life cycle of the products within the building. Comparisons using this EPD are only allowable when the same functional requirements between products are ensured and the requirements of ISO 21930:2017 section 5.5 are met. Different LCA software and background LCI datasets may lead to different results across EPDs. |



# 1. PRODUCT IDENTIFICATION

## 1.1. PRODUCT DEFINITION


Softwood lumber is a versatile product that is used in a variety of applications. It is primarily associated with the construction and renovation of low-rise residential buildings, but it is also used in commercial construction and the fabrication of furniture and other products. The four major commercial species of Canadian lumber are Spruce-Pine-Fir, Douglas Fir-Larch, Hem-Fir and Northern Species<sup>1</sup>. Softwood species and grade groups have varying specific densities. This study has normalized to an average density of 428 kg oven dry/m<sup>3</sup> of softwood lumber<sup>2</sup>. All softwood lumber graded under National Lumber Grades Authority (NLGA) rules or provincial equivalents are deemed covered under this EPD.

Softwood lumber produced in Canada is available in a range of nominal dimensions, the most common being nominally two inches thick by four inches wide (“2x4”) and nominally two inches thick by six inches wide (“2x6”), which together account for about 75% of dimension lumber production. These nominal dimensions are a long-standing industry convention, referencing the original size prior to drying and planing. The actual dimensions of planed, dry lumber reflects drying shrinkage and material removed during planing, which means that a nominal dimension of 2x4 is actually 1.5 inches thick by 3.5 inches wide. For purposes of this study the declared unit is one cubic metre of planed and dried lumber<sup>3</sup>. The product covered in this EPD falls under the following United Nations Standard Products and Services Code (UNSPSC) and Construction Specification Institute (CSI) MasterFormat Codes:

- UNSPSC: Structural products/ Framing lumber/ 301036 03
- CSI /CSC: Sawn timber (Lumber)/ Wood Framing/ 06 11 00

## 1.2. FLOW DIAGRAM

Figure 1 provides a flow diagram for softwood lumber production (also see section 3.1 for more detail on the processes).

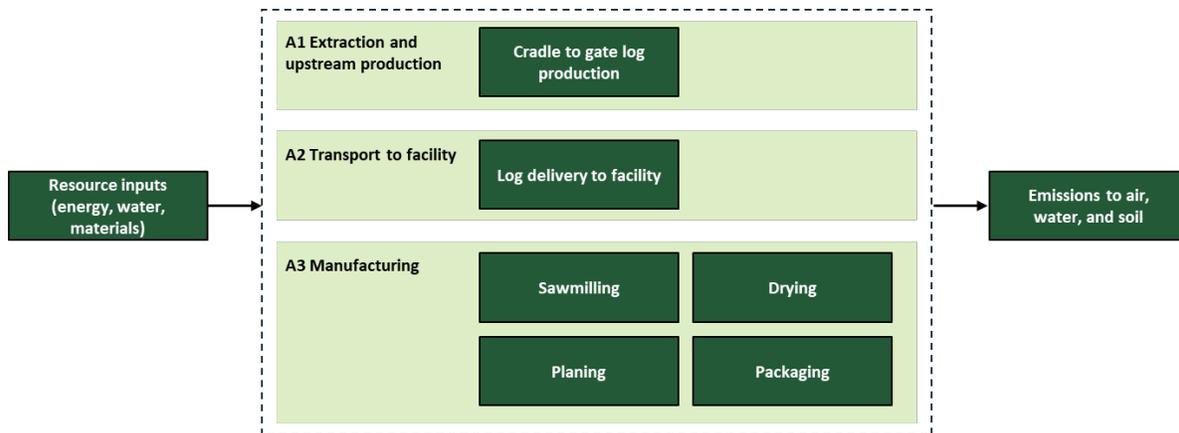

**Figure 1: Cradle-to-gate flow diagram for softwood lumber**

<sup>1</sup> For details on species combinations and lumber stamp identifications, refer to table 6.2.1.2 in the standard CSA 086:2024: Engineering Design in Wood.

<sup>2</sup> This is in alignment with the density range of 350-500 kg oven dry/m<sup>3</sup> given in table A.12.1 of the above referenced standard.

<sup>3</sup> Some of this may be green lumber (likely less than 5%), and this is presumed to have a negligible effect on the results.



### 1.3. PRODUCT AVERAGE

Foreground gate-to-gate LCI data were collected for softwood lumber production from a sample of mills with good representation of the Canadian industry-average technology mix and provincial/regional geographic representation. Within each region, each facility's specific input and output flow data were weighted based on their contribution to the total annual production to calculate each regional weighted-average profile.

The study sample included 94 manufacturing sites which represents about 15% of all establishments and producing 60% of the softwood lumber in Canada. The provincial/regional groups are as follows:

- British Columbia (BC)<sup>4</sup>
- Alberta (AB)
- Ontario (ON)
- Quebec (QC)
- New Brunswick (NB)
- Atlantic Canada (Prince Edward Island, Nova Scotia, Newfoundland and Labrador) (ATL)

A summary of the plant sample representativeness is shown in Table 1.

**Table 1: Plant Sample – Regional Participation Statistics**

|                                     | BC         | AB        | ON        | QC         | NB        | ATL       |
|-------------------------------------|------------|-----------|-----------|------------|-----------|-----------|
| Number of plants in study           | 23         | 14        | 16        | 28         | 6         | 7         |
| Sample production (m <sup>3</sup> ) | 9,614,343  | 7,387,060 | 4,177,278 | 7,270,856  | 1,946,856 | 1,201,455 |
| Total production (m <sup>3</sup> )* | 18,636,100 | 8,834,455 | 4,908,300 | 13,316,800 | 3,302,600 | 1,943,600 |
| Sample as a % of production         | 52%        | 84%       | 85%       | 55%        | 59%       | 62%       |

\*Source: Provincial and regional lumber manufacturing associations as per personal communication with Canadian Wood Council.

### 1.4. APPLICATION

Softwood lumber is a versatile product that is used in a variety of applications. It is primarily associated with the construction and renovation of low-rise residential buildings, but it is also used in commercial construction and the fabrication of furniture and other products.

### 1.5. MATERIAL COMPOSITION

Softwood lumber consists entirely of softwood (wood produced by conifer trees).

<sup>4</sup> Note that there is a previously published industry-average EPD for BC lumber. The results in this EPD are different, due to a different product year, a different sample of mills, and different background LCI data.



## 2. METHODOLOGICAL FRAMEWORK

### 2.1. DECLARED UNIT

The declared unit is defined as the quantity of a construction product for use as a reference unit in an EPD based on LCA for the expression of environmental information in information modules (1). Per the PCR, the declared unit for softwood lumber is one cubic metre with a density of 428 oven dry kg per m<sup>3</sup>.

### 2.2. SYSTEM BOUNDARY

The boundary is “cradle-to-gate” or the Production stage, which includes extraction of raw materials (cradle) through the manufacture of softwood lumber ready for shipment (gate). Downstream activity stages – Construction, Use, End-of-life, and Optional supplementary information beyond the system boundary – are excluded from the system boundary (see Figure 2).

Per ISO 21930, section 7.1.7.2.1, the system boundary with nature includes those technical processes that provide the material and energy inputs into the system and the subsequent manufacturing and transport processes up to the factory gate, as well as the processing of any waste arising from those processes.

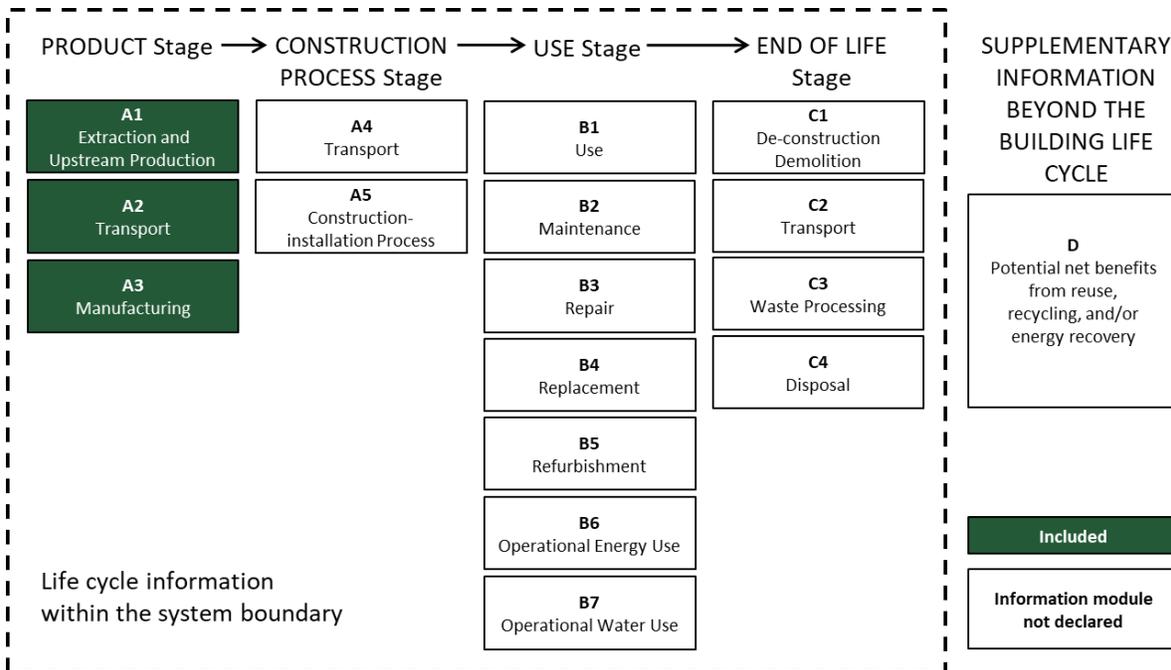


Figure 2: System boundary

### 2.3. ALLOCATION

Allocation is the method used to assign environmental loads when several products, co-products, or functions share the same process. Loads were allocated by mass. Note that the lumber production system generates valuable coproducts corresponding with the three underlying processes (sawing, kiln drying, and planing) that comprise the A3 production module. The sawing process consumes electricity, diesel, and LPG, which are allocated between the primary product and all green coproducts. The drying process consumes natural gas, heating oil, and wood fuel, which are allocated between the primary product and



all dry coproducts. The planing process also consumes electricity, which is impossible to distinguish from the sawing energy, thus making it impossible to allocate this flow separately. The packaging is allocated entirely to the primary product.

## 2.4. CUT-OFF RULES

The cut-off criteria as per the PCR were followed. Per ISO 21930, section 7.1.8, all input/output data required were collected and included in the LCI modelling. No substances with hazardous and toxic properties that pose a concern for human health and/or the environment were identified in the framework of this LCA. Any plant-specific data gaps for the reference year 2022, e.g., input hydraulic fluids, lubricants, oils, or packaging materials, were filled in with plant generic data from previous years or industry-average data.

## 2.5. DATA SOURCES

Data collection was based on an initial survey of facility operations for members of the Forest Products Association of Canada (FPAC) and the Canadian Wood Council (CWC). The LCI data collection was done with the expressed intent of attaining an acceptable representation of the Canadian industry-average technology mix and provincial/regional geographic representation.

Foreground gate-to-gate LCI data were collected for softwood lumber production for the reference year 2022. Data collection was based on customized, web-based LCI surveys which covered the following primary data for each facility for the 2022 reference year:

- Lumber production
- Production energy
- Plant consumables
- Waste produced
- Air emissions (water emissions data was unavailable and was drawn from previous studies)

The LCA study drew on appropriate LCI datasets provided by:

- FPAC/CWC and its members for foreground gate-to-gate softwood lumber production (11);
- FPInnovations for 2021/22 harvesting and road building/maintenance LCI data for four provinces (11); and
- North American and global LCI databases such as the U.S. National Renewable Energy Laboratory LCI database (8), and ecoinvent 3.9, allocation, cut-off database (9). Both are included in the LCA software SimaPro.

Data calculation procedures follow ISO 14044 and the PCR. The same calculation procedures are applied throughout this LCA study. Per ISO 21930, section 7.2.2, when transforming the inputs and outputs of combustible material into inputs and outputs of energy, the net calorific value (lower heating value) of fuels is applied according to scientifically based and accepted values specific to the combustible material.

## 2.6. DATA QUALITY

Per the PCR and ISO 21930, appropriate activity and LCI foreground and background data shall be used to model the softwood lumber production systems. Overall data quality is assessed based on its representativeness (technology coverage, geographic coverage, time coverage), completeness, consistency, reproducibility, transparency and uncertainty – see Table 2.

**Table 2: Data Quality Requirements and Assessments**

| <b>Data Quality Requirements</b> | <b>Description</b>  |
|----------------------------------|---|
| <b>Technology Coverage</b>       | Foreground data represents the prevailing regional technology in use in Canada. These data reflect the range of softwood lumber plant types in use across Canada (e.g., stud and dimension lumber mills).   |
| <b>Geographic Coverage</b>       | The geographic region considered is Canada (provincial or regional). The geographic coverage of all LCI databases and datasets is provided in the LCA report.   |
| <b>Time Coverage</b>             | <p>Activity data are representative as of 2022.</p> <ul style="list-style-type: none"> <li>• Forest harvesting and road building/maintenance: primary data collected from 17 sites in four provinces.</li> <li>• In-bound/ out-bound transportation data: primary data collected from 94 facilities: reference year 2022 (12 months).</li> <li>• Generic data: the most appropriate LCI datasets were used as found in the US LCI Database, ecoinvent v.3.9 database for US, Canada and global.</li> </ul>  |
| <b>Completeness</b>              | All relevant, specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to provide provincial/regional industry average profiles. In some instances, some minor data were missing (e.g., consumables such as lubricants) and were backfilled with data from previous industry studies. These data are not expected to unduly impact the results of this study. The relevant background materials and processes were taken from the US LCI Database, ecoinvent v.3.9 LCI database adjusted for the appropriate regional system boundary and modeled in SimaPro v.9.5.         |
| <b>Consistency</b>               | To ensure consistency, the LCI modeling of the production weighted input and output LCI data for softwood lumber used the same LCI modeling structure across the selected FPAC/CWC member facilities, which consisted of input raw, secondary, ancillary and packaging materials, energy flows, water resource inputs, product outputs, co-products, by-products, emissions to air, water and soil, and solid and liquid waste disposal. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The LCA team conducted mass and energy balances at the facility level and selected process levels to maintain a high level of consistency. |
| <b>Reproducibility</b>           | Internal reproducibility is possible since the data and the models are stored and available. A high level of transparency is provided throughout the LCA report as the weighted-average LCI profile is presented for the declared product as well as major upstream inputs. Key foreground (manufacturer specific) and background (generic) LCI data sources are summarized in the LCA report. External reproducibility is also possible as a high level of transparency is provided in the LCA report.   |
| <b>Transparency</b>              | Activity and LCI datasets are transparently disclosed in the LCA report, including data sources.  |
| <b>Uncertainty</b>               | A sensitivity check was conducted to assess the reliability of the LCA results and conclusions by determining how they are affected by uncertainties in the data or assumptions on calculation of LCIA and energy indicator results. The sensitivity check includes the results of the sensitivity analysis.  |



## 2.7. BIOGENIC CARBON

Wood is a biobased material and thus contains biogenic carbon. The accounting of biogenic carbon in this LCA follows the requirements set out in ISO 21930:2017 section 7.2.7 and 7.2.12. Per ISO 21930, biogenic carbon enters the product system (a removal) as primary or secondary material. The carbon removal is considered a negative emission. The biogenic carbon leaves the system (an emission) as product, coproducts, and directly to the atmosphere when combusted. These mass flows of biogenic carbon from and to nature are listed in the LCI and expressed in kg CO<sub>2</sub>.

In the LCIA, the LCI flow of biogenic carbon removal is characterized with a factor of -1 kg CO<sub>2</sub> eq./kg CO<sub>2</sub> of biogenic carbon in the calculation of the GWP<sup>5</sup>. Likewise, the LCI flow of biogenic carbon emission is characterized with a factor of +1 kg CO<sub>2</sub> eq./kg CO<sub>2</sub> of biogenic carbon in the calculation of the GWP. Emissions other than CO<sub>2</sub> associated with biomass combustion (e.g., methane or nitrogen oxides) are characterized by their specific radiative forcing factors in the calculation of the GWP.

The PCR (5) specifies TRACI as the default LCIA method for GWP. The TRACI method does not account for the removals or emissions of biogenic CO<sub>2</sub>. Therefore, the component of the global warming potential related to biogenic carbon was calculated separately. This study reports the GWP indicator both with and without the biogenic CO<sub>2</sub> component for maximum transparency.

The GWP results in this EPD conservatively assume there is no long-term biogenic carbon storage. This is discussed further in section 5.

## 3. TECHNICAL INFORMATION AND SCENARIOS

### 3.1. MANUFACTURING

The cradle-to-gate EPD includes the three Production modules: A1 Extraction and upstream production, A2 Transport, and A3 Manufacturing.

**Upstream raw material production (Raw Materials A1):** This process begins in the forest with harvesting, processing and road building/maintenance activities. Activities include harvesting of trees by chainsaw, harvester, or feller buncher as per a management regime (logging). The tree is turned into logs by removing the limbs (delimiting) and cutting it into logs of optimal length (bucking). The logs are moved from the stump to the landing by ground vehicles, cable systems or flown to the landing by helicopter. Some logs are not bucked until they are transferred to the landing or mill site. The process ends with the logs loaded on to trucks. This EPD does not include any potential impacts associated with nursery operations (which include fertilizer, irrigation, energy for greenhouses if applicable etc.), as well as planting, fertilization, thinning and other management operations.

---

<sup>5</sup> ISO 21930 requires a demonstration of forest sustainability to characterize carbon removals with a factor of -1 kg CO<sub>2</sub>e/kg CO<sub>2</sub>. ISO 21930 Section 7.2.1 Note 2 states the following regarding demonstrating forest sustainability: "Other evidences such as national reporting under the United Nations Framework Convention on Climate Change (UNFCCC) can be used to identify forests with stable or increasing forest carbon stocks." Canada's UNFCCC annual report Table 6-1 provides annual NET GHG Flux Estimates for different land use categories in 2021 (see link [https://publications.gc.ca/collections/collection\\_2023/eccc/En81-4-2021-1-eng.pdf](https://publications.gc.ca/collections/collection_2023/eccc/En81-4-2021-1-eng.pdf)). This reporting indicates stable forest carbon stocks and thus the source forests meet the conditions for characterization of removals with a factor of -1 kg CO<sub>2</sub>e/kg CO<sub>2</sub>.



**Transportation of materials to the lumber mill (Transport A2):** The “resource and material transportation” system process includes the transportation of the logs and ancillary production materials to the mill, commonly by truck. See Table 3 for transportation scenario data by region.

**Table 3: Log Transportation Scenarios**

| Inputs          | Units | BC     | AB    | ON    | QC    | NB    | ATL    |
|-----------------|-------|--------|-------|-------|-------|-------|--------|
| Truck Transport | tkm   | 110.71 | 95.55 | 91.36 | 87.40 | 62.53 | 124.92 |

**Softwood lumber production (Manufacturing A3):** Softwood lumber manufacturing includes sawing, kiln drying, and planing. Sawing encompasses all log handling from reception at mill gate (including “hot pond” treatment and debarking) to the breakdown of the logs into rough green lumber. Drying encompasses the kilns, loading area, and unloading/cooling (storage) and air-drying areas. Planing encompasses the unstacker, planer, and packaging areas. Each of these includes conveyance to the next unit.

### 3.2. PACKAGING

Packaging consists of steel strapping, plastic strapping, and lumber wrap. Packaging is included in the A3 module.

## 4. ENVIRONMENTAL INDICATORS DERIVED FROM LCA

See Table 4 for a list of impact category and inventory indicators reported, and the methods used. See Tables 5 to 10 for the regional results. It should be noted that life cycle impact assessment (LCIA) results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

**Table 4: Impact category and inventory indicators reported**

| Impact category and inventory indicators                             | Short name        | Unit                   | Source of the method                            |
|--|-------------------|------------------------|---|
| <b>Environmental impacts</b>   |                   |                        |   |
| Global warming potential (including fossil and biogenic components)  | GWP               | kg CO <sub>2</sub> eq. | TRACI v2.1, July 2012 /with IPCC 2013, AR5 (10) |
| Ozone depletion potential  | ODP               | kg CFC-11 eq.          | TRACI v2.1, July 2012/WMO:2003 (10)             |
| Acidification potential  | AP                | kg SO <sub>2</sub> eq. | TRACI v2.1, July 2012 (10)                      |
| Eutrophication potential   | EP                | kg N eq.               | TRACI v2.1, July 2012 (10)                      |
| Photochemical oxidant creation potential                             | POCP              | kg O <sub>3</sub> eq.  | TRACI v2.1, July 2012 (10)                      |
| <b>Use of primary resources</b>                                      |                   |                        |   |
| Renewable primary resources used as an energy carrier (fuel)         | RPR <sub>E</sub>  | MJ, LHV                | CED V1.10 MJ, LHV                               |
| Renewable primary resources with energy content used as material     | RPR <sub>M</sub>  | MJ, LHV                | ACLCA ISO 21930 Guidance, 6.2 (12)              |
| Non-renewable primary resources used as an energy carrier (fuel)     | NRPR <sub>E</sub> | MJ, LHV                | CED V1.10 MJ, LHV                               |
| Non-renewable primary resources with energy content used as material | NRPR <sub>M</sub> | MJ, LHV                | ACLCA ISO 21930 Guidance, 6.4 (12)              |
| <b>Use of secondary resources</b>                                    |                   |                        |   |
| Secondary materials  | SM                | kg                     | ACLCA ISO 21930 Guidance, 6.5 (12)              |
| Renewable secondary fuels  | RSF               | MJ, LHV                | ACLCA ISO 21930 Guidance, 6.6 (12)              |
| Non-renewable secondary fuels  | NRSF              | MJ, LHV                | ACLCA ISO 21930 Guidance, 6.7 (12)              |
| Recovered energy   | RE                | MJ, LHV                | ACLCA ISO 21930 Guidance, 6.8 (12)              |
| <b>Abiotic depletion potential for fossil resources and elements</b> |                   |                        |   |
| Abiotic depletion potential, fossil                                  | ADP <sub>f</sub>  | MJ, LHV                | CML-baseline, V3.09                             |
| Abiotic depletion potential, elements                                | ADP <sub>e</sub>  | kg Sb eq.              | CML-baseline, V3.09                             |
| <b>Consumption of freshwater resources</b>                           |                   |                        |   |
| Consumption (or net use) of freshwater                               | FW                | m <sup>3</sup>         | ACLCA ISO 21930 Guidance, 9 (12)                |
| <b>Waste and output flows</b>  |                   |                        |   |
| Hazardous waste disposed   | HWD               | kg                     | ACLCA ISO 21930 Guidance, 10.1 (12)             |
| Non-hazardous waste disposed   | NHWD              | kg                     | ACLCA ISO 21930 Guidance, 10.2 (12)             |
| High-level radioactive waste, to final repository                    | HLRW              | m <sup>3</sup>         | ACLCA ISO 21930 Guidance, 10.3 (12)             |
| Intermediate- and low-level radioactive waste, to final repository   | ILLRW             | m <sup>3</sup>         | ACLCA ISO 21930 Guidance, 10.4 (12)             |
| Components for reuse   | CRU               | kg                     | ACLCA ISO 21930 Guidance, 10.5 (12)             |
| Materials for recycling  | MR                | kg                     | ACLCA ISO 21930 Guidance, 10.6 (12)             |
| Materials for energy recovery  | MER               | kg                     | ACLCA ISO 21930 Guidance, 10.7 (12)             |
| Recovered energy exported from the product system                    | EE                | MJ, LHV                | ACLCA ISO 21930 Guidance, 10.8 (12)             |

**Table 5: LCA Results for 1 m<sup>3</sup> softwood lumber produced in British Columbia**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 4.15E+01 | -1.57E+03 | 6.12E+00 | 1.61E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 4.15E+01 | 1.26E+01  | 6.12E+00 | 2.28E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.58E+03 | 0.00E+00 | 1.58E+03 |
| ODP  | kg CFC-11 eq.          | 1.49E-06 | 2.38E-07  | 2.58E-10 | 1.25E-06 |
| AP   | kg SO <sub>2</sub> eq. | 4.78E-01 | 1.70E-01  | 7.15E-02 | 2.36E-01 |
| EP   | kg N eq.               | 3.66E-02 | 1.11E-02  | 4.28E-03 | 2.12E-02 |
| POCP                                       | kg O <sub>3</sub> eq.  | 1.02E+01 | 5.39E+00  | 1.81E+00 | 3.02E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 9.42E+02 | 2.15E-01  | 0.00E+00 | 9.42E+02 |
| RPR <sub>M</sub>                           | MJ, LHV                | 1.02E+04 | 1.02E+04  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 6.99E+02 | 1.87E+02  | 9.31E+01 | 4.19E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 6.42E+02 | 1.76E+02  | 8.78E+01 | 3.78E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 2.06E-05 | 3.38E-09  | 0.00E+00 | 2.06E-05 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 1.14E-02 | 1.29E-04  | 0.00E+00 | 1.13E-02 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 3.91E-09 | 6.97E-11  | 0.00E+00 | 3.84E-09 |
| ILLRW                                      | m <sup>3</sup>         | 4.31E-08 | 3.35E-10  | 0.00E+00 | 4.28E-08 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |

Note that there is a previously published industry-average EPD for BC lumber. The results in this EPD are different, due to a different product year, a different sample of mills, and different background LCI data.

**Table 6: LCA Results for 1 m<sup>3</sup> softwood lumber produced in Alberta**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 5.70E+01 | -1.66E+03 | 4.96E+00 | 1.72E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 5.70E+01 | 1.81E+01  | 4.96E+00 | 3.40E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.68E+03 | 0.00E+00 | 1.68E+03 |
| ODP  | kg CFC-11 eq.          | 1.89E-06 | 3.43E-07  | 2.09E-10 | 1.55E-06 |
| AP   | kg SO <sub>2</sub> eq. | 5.70E-01 | 2.45E-01  | 5.79E-02 | 2.67E-01 |
| EP   | kg N eq.               | 1.83E-01 | 1.60E-02  | 3.46E-03 | 1.64E-01 |
| POCP                                       | kg O <sub>3</sub> eq.  | 1.22E+01 | 7.74E+00  | 1.46E+00 | 3.03E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 4.84E+02 | 3.09E-01  | 0.00E+00 | 4.83E+02 |
| RPR <sub>M</sub>                           | MJ, LHV                | 9.55E+03 | 9.55E+03  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 9.02E+02 | 2.69E+02  | 7.54E+01 | 5.58E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 8.31E+02 | 2.54E+02  | 7.11E+01 | 5.06E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 1.73E-05 | 4.87E-09  | 0.00E+00 | 1.73E-05 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 7.46E-02 | 1.85E-04  | 0.00E+00 | 7.45E-02 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 1.30E-09 | 1.00E-10  | 0.00E+00 | 1.20E-09 |
| ILLRW                                      | m <sup>3</sup>         | 2.16E-08 | 4.83E-10  | 0.00E+00 | 2.11E-08 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |

**Table 7: LCA Results for 1 m<sup>3</sup> softwood lumber produced in Ontario**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 5.46E+01 | -1.95E+03 | 4.02E+00 | 2.01E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 5.46E+01 | 2.64E+01  | 4.02E+00 | 2.42E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.98E+03 | 0.00E+00 | 1.98E+03 |
| ODP  | kg CFC-11 eq.          | 1.51E-06 | 5.00E-07  | 1.70E-10 | 1.01E-06 |
| AP   | kg SO <sub>2</sub> eq. | 6.44E-01 | 3.58E-01  | 4.70E-02 | 2.40E-01 |
| EP   | kg N eq.               | 6.33E-02 | 2.34E-02  | 2.81E-03 | 3.71E-02 |
| POCP                                       | kg O <sub>3</sub> eq.  | 1.50E+01 | 1.13E+01  | 1.19E+00 | 2.51E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 3.59E+02 | 4.51E-01  | 0.00E+00 | 3.58E+02 |
| RPR <sub>M</sub>                           | MJ, LHV                | 8.11E+03 | 8.11E+03  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 1.01E+03 | 3.93E+02  | 6.12E+01 | 5.52E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 8.09E+02 | 3.70E+02  | 5.77E+01 | 3.81E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 1.48E-05 | 7.11E-09  | 0.00E+00 | 1.48E-05 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 1.92E-01 | 2.70E-04  | 0.00E+00 | 1.92E-01 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 5.69E-07 | 1.46E-10  | 0.00E+00 | 5.68E-07 |
| ILLRW                                      | m <sup>3</sup>         | 4.29E-07 | 7.04E-10  | 0.00E+00 | 4.29E-07 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |

**Table 8: LCA Results for 1 m<sup>3</sup> softwood lumber produced in Quebec**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 2.48E+01 | -1.83E+03 | 4.16E+00 | 1.85E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 2.48E+01 | 8.42E+00  | 4.16E+00 | 1.22E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.84E+03 | 0.00E+00 | 1.84E+03 |
| ODP  | kg CFC-11 eq.          | 5.66E-07 | 1.60E-07  | 1.75E-10 | 4.06E-07 |
| AP   | kg SO <sub>2</sub> eq. | 2.65E-01 | 1.14E-01  | 4.86E-02 | 1.03E-01 |
| EP   | kg N eq.               | 1.51E-02 | 7.46E-03  | 2.90E-03 | 4.79E-03 |
| POCP                                       | kg O <sub>3</sub> eq.  | 6.43E+00 | 3.61E+00  | 1.23E+00 | 1.59E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 5.40E+02 | 1.44E-01  | 0.00E+00 | 5.39E+02 |
| RPR <sub>M</sub>                           | MJ, LHV                | 8.75E+03 | 8.75E+03  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 4.17E+02 | 1.26E+02  | 6.32E+01 | 2.28E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 3.87E+02 | 1.18E+02  | 5.96E+01 | 2.09E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 5.85E-06 | 2.27E-09  | 0.00E+00 | 5.84E-06 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 2.11E-03 | 8.63E-05  | 0.00E+00 | 2.02E-03 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 1.32E-08 | 4.68E-11  | 0.00E+00 | 1.32E-08 |
| ILLRW                                      | m <sup>3</sup>         | 1.01E-08 | 2.25E-10  | 0.00E+00 | 9.86E-09 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |

**Table 9: LCA Results for 1 m<sup>3</sup> softwood lumber produced in New Brunswick**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 4.14E+01 | -1.94E+03 | 2.93E+00 | 1.97E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 4.14E+01 | 8.42E+00  | 2.93E+00 | 3.00E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.94E+03 | 0.00E+00 | 1.94E+03 |
| ODP  | kg CFC-11 eq.          | 2.38E-06 | 1.60E-07  | 1.24E-10 | 2.22E-06 |
| AP   | kg SO <sub>2</sub> eq. | 4.84E-01 | 1.14E-01  | 3.43E-02 | 3.36E-01 |
| EP   | kg N eq.               | 7.74E-02 | 7.45E-03  | 2.05E-03 | 6.79E-02 |
| POCP                                       | kg O <sub>3</sub> eq.  | 9.27E+00 | 3.61E+00  | 8.67E-01 | 4.79E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 1.58E+03 | 1.44E-01  | 0.00E+00 | 1.58E+03 |
| RPR <sub>M</sub>                           | MJ, LHV                | 8.26E+03 | 8.26E+03  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 6.92E+02 | 1.26E+02  | 4.46E+01 | 5.22E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 5.81E+02 | 1.18E+02  | 4.21E+01 | 4.20E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 2.15E-05 | 2.27E-09  | 0.00E+00 | 2.15E-05 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 1.39E-01 | 8.63E-05  | 0.00E+00 | 1.39E-01 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 3.00E-07 | 4.68E-11  | 0.00E+00 | 3.00E-07 |
| ILLRW                                      | m <sup>3</sup>         | 5.25E-07 | 2.25E-10  | 0.00E+00 | 5.24E-07 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |

**Table 10: LCA Results for 1 m<sup>3</sup> softwood lumber produced in Atlantic Canada**

| Impact category and inventory indicators   | Unit                   | A1-A3    | A1        | A2       | A3       |
|--|------------------------|----------|-----------|----------|----------|
| <b>Environmental impacts</b>               |                        |          |           |          |          |
| GWP Total                                  | kg CO <sub>2</sub> eq. | 3.71E+01 | -1.77E+03 | 6.13E+00 | 1.80E+03 |
| GWP Fossil                                 | kg CO <sub>2</sub> eq. | 3.71E+01 | 8.42E+00  | 6.13E+00 | 2.26E+01 |
| GWP Biogenic                               | kg CO <sub>2</sub> eq. | 0.00E+00 | -1.78E+03 | 0.00E+00 | 1.78E+03 |
| ODP  | kg CFC-11 eq.          | 6.03E-07 | 1.60E-07  | 2.59E-10 | 4.43E-07 |
| AP   | kg SO <sub>2</sub> eq. | 3.51E-01 | 1.14E-01  | 7.16E-02 | 1.65E-01 |
| EP   | kg N eq.               | 6.77E-02 | 7.45E-03  | 4.28E-03 | 5.60E-02 |
| POCP                                       | kg O <sub>3</sub> eq.  | 7.58E+00 | 3.61E+00  | 1.81E+00 | 2.16E+00 |
| <b>Use of primary resources</b>            |                        |          |           |          |          |
| RPR <sub>E</sub>                           | MJ, LHV                | 2.38E+02 | 1.44E-01  | 0.00E+00 | 2.38E+02 |
| RPR <sub>M</sub>                           | MJ, LHV                | 9.03E+03 | 9.03E+03  | 0.00E+00 | 0.00E+00 |
| NRPR <sub>E</sub>                          | MJ, LHV                | 5.68E+02 | 1.26E+02  | 9.32E+01 | 3.49E+02 |
| NRPR <sub>M</sub>                          | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Use of secondary resources</b>          |                        |          |           |          |          |
| SM   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RSF  | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NRSF                                       | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| RE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| <b>Abiotic depletion potential</b>         |                        |          |           |          |          |
| ADP <sub>f</sub>                           | MJ, LHV                | 5.27E+02 | 1.18E+02  | 8.79E+01 | 3.20E+02 |
| ADP <sub>e</sub>                           | kg Sb eq.              | 6.87E-05 | 2.27E-09  | 0.00E+00 | 6.87E-05 |
| <b>Consumption of freshwater resources</b> |                        |          |           |          |          |
| FW   | m <sup>3</sup>         | 4.18E-02 | 8.63E-05  | 0.00E+00 | 4.17E-02 |
| <b>Waste and output flows</b>              |                        |          |           |          |          |
| HWD  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| NHWD                                       | kg                     | 1.01E+01 | 0.00E+00  | 0.00E+00 | 1.01E+01 |
| HLRW                                       | m <sup>3</sup>         | 2.18E-08 | 4.68E-11  | 0.00E+00 | 2.17E-08 |
| ILLRW                                      | m <sup>3</sup>         | 2.24E-08 | 2.25E-10  | 0.00E+00 | 2.22E-08 |
| CRU  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MR   | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| MER  | kg                     | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |
| EE   | MJ, LHV                | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 |



## 5. ADDITIONAL INFORMATION

Additional inventory parameters related to biogenic carbon removals and emissions are given in Table 11. The carbon dioxide flows are presented unallocated to consider co-products leaving the product system in information module A3. Even though the system boundary of this study included only the information modules A1-A3, in accordance with ISO 21930, emissions from packaging are reported in A5 and emissions from the main product in C3/C4.

**Table 11: Biogenic carbon inventory parameters**

| Additional Inventory Parameters                                     |          | Unit                   | Total     | A1        | A2 | A3        | A5       | C3/C4    |
|---|----------|------------------------|-----------|-----------|----|-----------|----------|----------|
| Biogenic Carbon Removal from Product                                | BCRP BC  | kg CO <sub>2</sub> eq. | -1.58E+03 | -1.58E+03 |    |           |          |          |
|   | BCRP AB  | kg CO <sub>2</sub> eq. | -1.68E+03 | -1.68E+03 |    |           |          |          |
|   | BCRP ON  | kg CO <sub>2</sub> eq. | -1.98E+03 | -1.98E+03 |    |           |          |          |
|   | BCRP QC  | kg CO <sub>2</sub> eq. | -1.84E+03 | -1.84E+03 |    |           |          |          |
|   | BCRP NB  | kg CO <sub>2</sub> eq. | -1.94E+03 | -1.94E+03 |    |           |          |          |
|   | BCRP ATL | kg CO <sub>2</sub> eq. | -1.78E+03 | -1.78E+03 |    |           |          |          |
| Biogenic Carbon Emission from Product                               | BCEP BC  | kg CO <sub>2</sub> eq. | 1.50E+03  |           |    | 7.15E+02  |          | 7.85E+02 |
|   | BCEP AB  | kg CO <sub>2</sub> eq. | 1.64E+03  |           |    | 8.51E+02  |          | 7.85E+02 |
|   | BCEP ON  | kg CO <sub>2</sub> eq. | 1.95E+03  |           |    | 1.16E+03  |          | 7.85E+02 |
|   | BCEP QC  | kg CO <sub>2</sub> eq. | 1.79E+03  |           |    | 1.01E+03  |          | 7.85E+02 |
|   | BCEP NB  | kg CO <sub>2</sub> eq. | 1.79E+03  |           |    | 1.00E+03  |          | 7.85E+02 |
|   | BCEP ATL | kg CO <sub>2</sub> eq. | 1.76E+03  |           |    | 9.77E+02  |          | 7.85E+02 |
| Biogenic Carbon Removal from Packaging                              | BCRK     | kg CO <sub>2</sub> eq. | -9.50E-01 |           |    | -9.50E-01 |          |          |
| Biogenic Carbon Emission from Packaging                             | BCEK     | kg CO <sub>2</sub> eq. | 9.50E-01  |           |    |           | 9.50E-01 |          |
| Biogenic Carbon Emission from Combustion of Waste from Ren. Sources | BCEW BC  | kg CO <sub>2</sub> eq. | 8.26E+01  |           |    | 8.26E+01  |          |          |
|   | BCEW AB  | kg CO <sub>2</sub> eq. | 4.74E+01  |           |    | 4.74E+01  |          |          |
|   | BCEW ON  | kg CO <sub>2</sub> eq. | 3.47E+01  |           |    | 3.47E+01  |          |          |
|   | BCEW QC  | kg CO <sub>2</sub> eq. | 4.48E+01  |           |    | 4.48E+01  |          |          |
|   | BCEW NB  | kg CO <sub>2</sub> eq. | 1.56E+02  |           |    | 1.56E+02  |          |          |
|   | BCEW ATL | kg CO <sub>2</sub> eq. | 1.97E+01  |           |    | 1.97E+01  |          |          |

Abbreviations used in Table 11:

|      |   |     |                  |
|------|---|-----|------------------|
| BCRP | Biogenic carbon removal from product  | AB  | Alberta          |
| BCEP | Biogenic carbon emission from product   | BC  | British Columbia |
| BCRK | Biogenic carbon removal from packaging  | ON  | Ontario          |
| BCEK | Biogenic carbon emission from packaging   | QC  | Quebec           |
| BCEW | Biogenic carbon emission from combustion of waste from renewal sources used in production | NB  | New Brunswick    |
|      |   | ATL | Atlantic Canada  |



The net value for each region across the five biogenic carbon parameters reported in Table 11 is zero. This is conservative, as it does not account for permanent carbon sequestration in wood that has been landfilled at end of life.

Permanent carbon sequestration is calculated here per the method in Appendix A of the PCR (5). It is conservatively assumed that 100% of wood goes to landfill at end of life.

- Density of oven dry softwood lumber: 428 kg /m<sup>3</sup> (as indicated in section 1.1 of this EPD)
- Proportion of oven dry lumber that is carbon: 50% (commonly used average for softwoods)
- Mass of carbon in 1 cubic metre of oven dry lumber: 428 kg x .50 = 214 kg carbon
- Conversion factor, carbon to carbon dioxide equivalent (CO<sub>2</sub>e): 3.67 kg CO<sub>2</sub>e/1 kg carbon
- Sequestered CO<sub>2</sub>e in 1 cubic metre of oven dry lumber: 214 kg carbon x 3.67 = 785.38 kg CO<sub>2</sub>e
- Landfill methane emissions factor from the PCR: 0.00353 kg CH<sub>4</sub> per kg of oven dry wood
- Landfill methane emissions for 1 cubic metre oven dry lumber: 0.00353 kg x 428 kg = 1.51 kg CH<sub>4</sub>
- Convert landfill methane emissions to CO<sub>2</sub>e: 1.51 kg CH<sub>4</sub> x 25 (per the PCR) = 37.75 kg CO<sub>2</sub>e
- Landfill CO<sub>2</sub> emissions factor from the PCR: 0.206 kg CO<sub>2</sub> per kg of oven dry wood
- Landfill CO<sub>2</sub> emissions for 1 cubic metre oven dry lumber: 0.206 x 428 kg = 88.17 kg CO<sub>2</sub>
- Total landfill emissions for 1 cubic metre oven dry lumber: 37.75 kg CO<sub>2</sub>e + 88.17 kg CO<sub>2</sub> = 125.92 kg CO<sub>2</sub>e
- Net permanent sequestered carbon per cubic metre oven dry lumber: 785.38 kg CO<sub>2</sub>e (original) – 125.92 kg CO<sub>2</sub>e (landfill emissions) = 659.46 kg CO<sub>2</sub>e

## 6. INTERPRETATION

For best interpretation and appropriate use of LCA results, it is important to state the inherent limitations and assumptions of the LCA technique. LCA addresses “potential environmental impacts” and does not predict absolute or precise environmental impacts due to (a) the relative expression of potential environmental impacts to a reference unit, (b) the integration of environmental data over space and time, (c) the inherent uncertainty in modeling of environmental impacts, and (d) the fact that some possible environmental impacts are clearly future impacts (3).

Limitations include the fact that this study does not report all the environmental impacts caused by, for example, emissions that might impact human and/or ecosystem health. In order to assess the local impacts of product manufacturing on human health, land use and local ecology, additional analysis is required.

LCIA results are only relative expressions of potentials and do not predict actual impacts, the exceeding of thresholds, safety margins or risks.

This regional industry-average EPD for softwood lumber is not a comparative assertion; it does not imply superiority or equivalence of softwood lumber relative to a competing product. Only LCAs or EPDs prepared from cradle-to-grave life cycle results and based on the same function, reference service life (RSL), quantified by the same functional unit, and meeting all the conditions for comparability listed in ISO 14025:2006 and ISO 21930:2017 can be used to compare between products.



While this EPD does not address landscape level forest management impacts, potential impacts may be addressed through requirements put forth in regional regulatory frameworks, ASTM 7612-15 guidance, and ISO 21930 Section 7.2.11 including notes therein. These documents, combined with this EPD, may provide a more complete picture of environmental and social performance of wood products.

While this EPD does not address all forest management activities that influence forest carbon, wildlife habitat, endangered species, and soil and water quality, these potential impacts may be addressed through other mechanisms such as regulatory frameworks and/or forest certification systems which, combined with this EPD, may give a more complete picture of environmental and social performance of wood products.

EPDs can complement but cannot replace tools and certifications that are designed to address environmental impacts and/or set performance thresholds, e.g., Type 1 certifications, health assessments and declarations.

EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact when averaging data. Variability was estimated in this EPD by calculating various statistics for dominant inputs and then completing a sensitivity analysis based on +/- one standard deviation for these key contributing inputs.

## 7. REFERENCES

1. ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
2. ISO 14025: 2006 Environmental labeling and declarations - Type III environmental declarations - Principles and procedures.
3. ISO 14040/Amd1:2020 Environmental Management – Life Cycle Assessment – Principles and Framework, International Organization for Standardization, 2006.
4. ISO 14044/Amd1:2017/Amd2:2020 Environmental Management – Life Cycle Assessment – Requirements and guidelines, International Organization for Standardization, 2006.
5. UL Environment Part B Structural and Architectural Wood Products EPD Requirements v1.1, 2020.
6. ASTM Program Operator for Product Category Rules (PCRs) and Environmental Product Declarations (EPDs), General Program Instructions, 04/29/20.
7. PRé 2024. SimaPro LCA Software v9.5.0.2, 2024., <https://simapro.com/>.
8. U.S. National Renewable Energy Laboratory LCI database, 2014 (<http://www.nrel.gov/lci/>).
9. Ecoinvent 3.9, allocation, cut-off database, 2023 (<http://www.ecoinvent.org/>) U.S. Environmental Protection Agency (2012).
10. Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI) TRACI version 2.1. <https://nepis.epa.gov/Adobe/PDF/P100HN53.pdf>.
11. Athena Sustainable Materials Institute (2024). A Regionalized Industry-average Cradle-to-gate LCA of Canadian Softwood Lumber. National Research Council Canada: Ottawa, ON.
12. ACLCA 2019, Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017. The American Centre for Life Cycle Assessment. May, 2019.