


Environmental Product Declaration

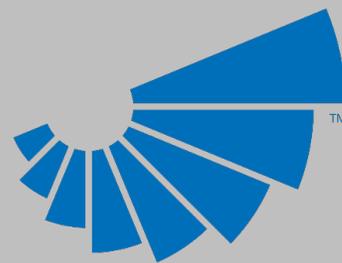

gcp

applied technologies

GCP Applied Technologies

RSC 50/51



ASTM INTERNATIONAL

According to
ISO 21930
ISO 14040/44

1. General Information

Manufacturer Name: GCP Applied Technologies Inc.
62 Whittemore Avenue
Cambridge, Massachusetts 02140 USA
<https://gcpat.com/en>



Program Operator: ASTM International
100 Barr Harbor Drive
West Conshohocken, PA
19428-2959, USA
<https://www.astm.org/>



Declaration Number: EPD 756

Reference PCR: ISO 21930 2017 serves as the core PCR

Date of Issuance: July 31, 2024

End of Validity: July 31, 2029

Product Name: RSC 50/51

EPD Owner: GCP Applied Technologies

Declared Unit: 1000 kg of concrete admixture

EPD Scope: Cradle-to-gate (A1, A2, and A3)

Verification: Independent verification of the declaration according to ISO 14040 and ISO 21930. internal external

Prepared By: WAP Sustainability Consulting

LCA Reviewer and EPD Verifier: Anne Landfield Greig
Principal
Four Elements Consulting, LLC

2. Product

2.1 Product Description and Application

RSC50/51 is a specialty concrete admixture. RSC 50 and RSC 51 are components of DUCTILCRETE®. DUCTILCRETE® engineered systems are optimized for industrial applications. These differentiated slab systems give warehouses, distribution centers, manufacturing facilities, and data centers greater flexibility in their floor space while lowering maintenance costs. In addition, DUCTILCRETE® paving solutions offer better performance and durability than conventional concrete paving.

2.2 Base Materials

Product formulations were included in the LCA for peer review. The raw materials used in the product are outlined below:

RSC 50: Acrylic polymer emulsion, ethylene glycol, colouring agent

RSC 51: Acrylic polymer emulsion, ethylene glycol, colouring agent, alkoxyate of fatty esters, water

The quantities or percentages are not shown for confidentiality reasons.

3. LCA Calculation Rules

3.1 Declared Unit

The declared unit is 1000 kg of RSC50/51 Concrete Admixture.

3.2 System Boundary

The system boundary for this study is limited to a cradle-to-gate focus. The following three life cycle stages as per the governing PCRs are included in the study scope (see also Table 4):

- **A1 Raw material supply** (upstream processes): Extraction, handling, and processing of input materials.
- **A2 Transportation**: Transportation of all raw materials from the suppliers to the gate of the manufacturing facility.
- **A3 Manufacturing** (core process): Manufacturing of the admixture products, including all energy and materials required and all emissions and wastes produced. This includes:

packaging, including transportation and waste disposal, to make admixtures ready for shipment.

3.3 Estimates and Assumptions

All significant foreground data was gathered from the manufacturer based on measured values (i.e. without estimation).

3.4 Cut-off Criteria

The cut-off criteria for all activity stage flows considered within the system boundary conform with ISO 21930: 2017 Section 7.1.8. Specifically, the cut-off criteria were applied as follows:

- All inputs and outputs for which data are available are included in the calculated effects and no collected core process data are excluded.
- A one percent cut-off is considered for renewable and non-renewable primary energy consumption and the total mass of inputs within a unit process. The sum of the total neglected flows does not exceed 5% of all energy consumption and mass of inputs.
- All flows known to contribute a significant impact or to uncertainty are included.
- The cut-off rules are not applied to hazardous and toxic material flows – all of which are included in the life cycle inventory.

No material or energy input or output was knowingly excluded from the system boundary indicators of this standard. Conservative assumptions in combination with plausibility considerations and expert judgment were used to demonstrate compliance with these criteria.

3.5 Data Quality

Data quality was assessed as per ISO 14044 Section 4.2.3.6.2. This LCA was created using industry average data for upstream materials. Data variation can result from differences in supplier locations, manufacturing processes, manufacturing efficiency and fuel types used. Data quality is judged on the basis of its representativeness (technological, temporal, and geographical), completeness (e.g., unreported emissions), consistency and reliability.

Technical representativeness: Technical representativeness is the degree to which the data reflects the actual technology(ies) used. Core manufacturing process technology is derived from the manufacturing facilities and is highly representative. The secondary data for inputs to the manufacturing process are deemed to be reflective of typical or average technologies used by GCP in the production of admixtures. Some background material and process data are European but deemed to be similar to technologies used in the US.

Temporal representativeness: Temporal representativeness is the degree to which the data reflects the actual time (e.g. year) or age of the activity. Core manufacturing process data is very recent (2022). All other LCI data sources are less than 10 years old.

Geographical representativeness: Geographical representativeness is the degree to which the data reflects the actual geographic location of the activity (e.g. country or site). Geographical coverage of core manufacturing processes is the United States generally, and specific to the eGrid regions in which the facilities exist. Some material and process data are based on European sources (ecoinvent v3) while others are based on European data but modified where possible to incorporate North American upstream data (USEI).

Completeness: Completeness is the degree to which the data are statistically representative of the relevant activity. Core manufacturing processes are very complete and were derived from data gathered at the participating facilities. These data reflect annual operations inclusive of seasonal and other normal annual fluctuations in operations. All relevant, specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to represent the specified and declared products. The relevant background materials and processes were taken from the US LCI Database (adjusted for known data placeholders); USEI Database; US system boundary adjusted Ecoinvent v3.7 LCI databases and modeled in SimaPro software v.8.0.1, 2014. Efforts were made to ensure that all data used was as complete as reasonably possible.

Reliability: Reliability is the degree to which the sources, data collection methods and verification procedures used to obtain the data are dependable. For core manufacturing processes the reliability of the information and data is deemed to be very good as these were derived from specific data of the production facilities. All missing process data (dummies) associated with the US LCI data have been consistently filled. All other LCI data have been incorporated from reputable databases.

Precision: GCP, through measurement and calculation, collected primary data on their annual production of the admixture product. The exact energy consumption at the facilities and the exact product formulations were incorporated into the study.

Consistency: To ensure consistency, the LCI modeling of the production weighted input and output LCI data for the declared products used the same modeling structure across the respective product systems, which consisted of input raw and ancillary material, energy flows, water resource

inputs, product and co-products outputs, emissions to air, water and soil, and waste recycling and treatment. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted.

Reproducibility: Internal reproducibility is possible since the data are stored in an available database as well as the calculations that were performed in the excel spreadsheet. A considerable level of transparency is provided throughout the report as the specifications and material quantity make-up for the declared products are presented.

3.6 Period under Review

Data was gathered for the primary material and energy inputs used in the production for calendar year 2022.

3.7 Allocation

“Mass” was deemed as the most appropriate physical parameter for allocation used for the admixture manufacturing system to calculate the input energy flows (electricity, natural gas and propane), packaging materials and waste flows per declared unit of 1,000 kg of product output.

3.8 Comparability

This LCA was created using industry average data for upstream materials. Data variation can result from differences in supplier locations, manufacturing processes, manufacturing efficiency and fuel types used. EPDs are comparable only if they comply with this document, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.

4. Technical Information

The various processes that occur at each stage are classified and grouped in information modules (or simply "modules"), labeled with alpha-numeric designations "A1" through "C4". A declared unit is defined for LCAs covering “cradle-to-gate”, or the production stage (shown Table 1), which consists of three modules: A1 Raw Material Supply; A2 Transport (to the manufacturer); and A3 Manufacturing. This study focuses on the product stage only and no Module D credits or burdens are included in the assessment.

The **Product stage** includes the following processes:

- **A1 Raw Material Supply** [1]: Extraction and processing of input raw materials (see Table 1, weighted average plant generic formulations for eight admixture products, including fuels used in extraction and transport within the process.
- **A2 Transport** [1]: Weighted average transportation of raw materials from extraction site or source to manufacturing site and including empty backhauls and transportation to interim distribution centers or terminals.
- **A3 Manufacturing** [1]: Manufacturing of the admixture products, including all energy and materials required and all emissions and wastes produced. The A3 module includes material handling and product mixing, lighting and heating, ventilation and air conditioning (HVAC), operation of environmental equipment (baghouses and bin vents), on-site transportation (loading and unloading) and storage of products.

The **Product Stage** excludes the following processes [1]:

- Production, manufacture, and construction of manufacturing capital goods and infrastructure;
- Production and manufacture of production equipment, delivery vehicles, and laboratory equipment;
- Personnel-related activities (travel, furniture, and office supplies); and
- Energy and water use related to company management and sales activities that may be located either within the factory site or at another location.

Table 1: Description of the System Boundary (x: included in LCA; mnd: module not declared)

| Product | | | Construction Installation | | Use | | | | | | | End-of-life | | | | Benefits of Loads Beyond the System Boundary | | |
|---------------------|-----------|---------------|---------------------------|-----------------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|-----------------------------|-----------|------------------|----------|--|----------|-----------|
| Raw Material supply | Transport | Manufacturing | Transport | Construction / Installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational Energy Use | Operational Water Use | De-Construction/ Demolition | Transport | Waste processing | Disposal | Reuse | Recovery | Recycling |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D | D | D |
| x | x | x | mnd | mnd | mnd | mnd | mnr | mnr | mnr | mnd | mnd | mnd | mnd | mnd | mnd | mnd | mnd | mnd |

5. LCA: Results

Life cycle impact assessment (LCIA) is the phase in which the set of results of the inventory analysis – the inventory flow table – is further processed and interpreted in terms of environmental impacts and resource use inventory metrics. Table 2 below summarizes the LCA results for the cradle-to-gate (A1-A3) product system.

| Table 2: Product Stage LCA Results for RSC50 | | | | | | |
|--|------------------|----------------------|--------------|-----------|-----------|-----------|
| CALCULATED RESULTS A1-A3 PER 1000 kg | | | | | | |
| Core Mandatory Impact Indicator | | | Total | A1 | A2 | A3 |
| Global warming potential | GWP | kg CO ₂ e | 3.00E+03 | 2.65E+03 | 1.09E+02 | 2.39E+02 |
| Depletion potential of the stratospheric ozone layer | ODP | kg CFC11e | 6.48E-05 | 5.72E-05 | 1.79E-06 | 5.77E-06 |
| Acidification potential of soil and water sources | AP | kg SO ₂ e | 1.55E+01 | 1.41E+01 | 6.48E-01 | 7.28E-01 |
| Eutrophication potential | EP | kg Ne | 1.99E+00 | 1.45E+00 | 4.37E-02 | 5.00E-01 |
| Formation potential of tropospheric ozone | SFP | kg O ₃ e | 1.86E+02 | 1.60E+02 | 1.77E+01 | 7.92E+00 |
| Abiotic depletion potential for fossil resources | ADP _f | MJ, NCV | 5.04E+04 | 4.44E+04 | 1.40E+03 | 4.65E+03 |
| Abiotic depletion potential for non-fossil mineral resources | ADP _e | kg S _{be} | 1.11E-02 | 1.10E-02 | 7.42E-07 | 5.03E-05 |
| Use of Primary Resources | | | Total | A1 | A2 | A3 |
| Renewable primary energy carrier used as energy | RPRE | MJ, NCV | 2.23E+03 | 2.05E+03 | 1.73E+00 | 1.78E+02 |
| Renewable primary energy carrier used as material | RPRM | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-renewable primary energy carrier used as energy | NRPRE | MJ, NCV | 5.76E+04 | 5.03E+04 | 1.49E+03 | 5.83E+03 |
| Non-renewable primary energy carrier used as material | NRPRM | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Secondary Material, Secondary Fuel and Recovered Energy | | | Total | A1 | A2 | A3 |
| Secondary material | SM | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Renewable secondary fuel | RSF | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-renewable secondary fuel | NRSF | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Recovered energy | RE | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Mandatory Inventory Parameters | | | Total | A1 | A2 | A3 |
| Consumption of freshwater resources | FW | m ³ | 8.64E+03 | 8.64E+03 | 2.16E-03 | 4.95E-01 |
| Indicators Describing Waste | | | Total | A1 | A2 | A3 |
| Hazardous waste disposed | HWD | kg | 4.06E+00 | 0.00E+00 | 0.00E+00 | 4.06E+00 |
| Non-hazardous waste disposed | NHWD | kg | 1.59E-01 | 0.00E+00 | 0.00E+00 | 1.59E-01 |
| High-level radioactive waste, conditioned, to final repository | HLRW | m ³ | 2.01E-06 | 1.81E-06 | 5.89E-10 | 1.94E-07 |
| Intermediate- and low-level radioactive waste, to final repository | ILLRW | m ³ | 1.06E-05 | 9.08E-06 | 2.83E-09 | 1.49E-06 |
| Components for re-use | CRU | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for recycling | MR | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for energy recovery | MER | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Recovered energy exported from the product system | EE | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

* The declared product does not contain any biogenic carbon.

Table 3: Product Stage LCA Results for RSC51

| CALCULATED RESULTS A1-A3 PER 1000 kg | | | | | | |
|--|------------------|----------------------|--------------|-----------|-----------|-----------|
| Core Mandatory Impact Indicator | | | Total | A1 | A2 | A3 |
| Global warming potential | GWP | kg CO ₂ e | 2.83E+03 | 2.50E+03 | 9.87E+01 | 2.39E+02 |
| Depletion potential of the stratospheric ozone layer | ODP | kg CFC11e | 6.20E-05 | 5.46E-05 | 1.62E-06 | 5.77E-06 |
| Acidification potential of soil and water sources | AP | kg SO ₂ e | 1.43E+01 | 1.30E+01 | 5.85E-01 | 7.28E-01 |
| Eutrophication potential | EP | kg Ne | 2.49E+00 | 1.96E+00 | 3.95E-02 | 5.00E-01 |
| Formation potential of tropospheric ozone | SFP | kg O ₃ e | 1.73E+02 | 1.49E+02 | 1.60E+01 | 7.92E+00 |
| Abiotic depletion potential for fossil resources | ADP _f | MJ, NCV | 4.64E+04 | 4.05E+04 | 1.26E+03 | 4.65E+03 |
| Abiotic depletion potential for non-fossil mineral resources | ADP _e | kg S _b e | 1.03E-02 | 1.03E-02 | 6.70E-07 | 5.03E-05 |
| Use of Primary Resources | | | Total | A1 | A2 | A3 |
| Renewable primary energy carrier used as energy | RPRE | MJ, NCV | 2.19E+03 | 2.01E+03 | 1.57E+00 | 1.78E+02 |
| Renewable primary energy carrier used as material | RPRM | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-renewable primary energy carrier used as energy | NRPRE | MJ, NCV | 5.35E+04 | 4.63E+04 | 1.34E+03 | 5.83E+03 |
| Non-renewable primary energy carrier used as material | NRPRM | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Secondary Material, Secondary Fuel and Recovered Energy | | | Total | A1 | A2 | A3 |
| Secondary material | SM | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Renewable secondary fuel | RSF | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-renewable secondary fuel | NRSF | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Recovered energy | RE | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Mandatory Inventory Parameters | | | Total | A1 | A2 | A3 |
| Consumption of freshwater resources | FW | m ³ | 7.90E+03 | 7.90E+03 | 1.95E-03 | 4.95E-01 |
| Indicators Describing Waste | | | Total | A1 | A2 | A3 |
| Hazardous waste disposed | HWD | kg | 4.06E+00 | 0.00E+00 | 0.00E+00 | 4.06E+00 |
| Non-hazardous waste disposed | NHWD | kg | 1.59E-01 | 0.00E+00 | 0.00E+00 | 1.59E-01 |
| High-level radioactive waste, conditioned, to final repository | HLRW | m ³ | 1.84E-06 | 1.65E-06 | 5.32E-10 | 1.94E-07 |
| Intermediate- and low-level radioactive waste, to final repository | ILLRW | m ³ | 9.75E-06 | 8.25E-06 | 2.56E-09 | 1.49E-06 |
| Components for re-use | CRU | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for recycling | MR | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for energy recovery | MER | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Recovered energy exported from the product system | EE | MJ, NCV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

6. Interpretation

Figure 1 shows the relative contribution to the cumulative impacts of the A1 through A3 phases of the cradle-to-gate life cycle. The impact categories global warming potential, ozone depletion potential, acidification potential, eutrophication potential, smog creation potential, and abiotic depletion potential are dominated by A1: raw material supply. These impacts are caused by the upstream production of the material inputs into the admixtures and account for most of the impacts in the various impact categories.

Figure 1. Contribution Analysis: A1-A3 RSC 50


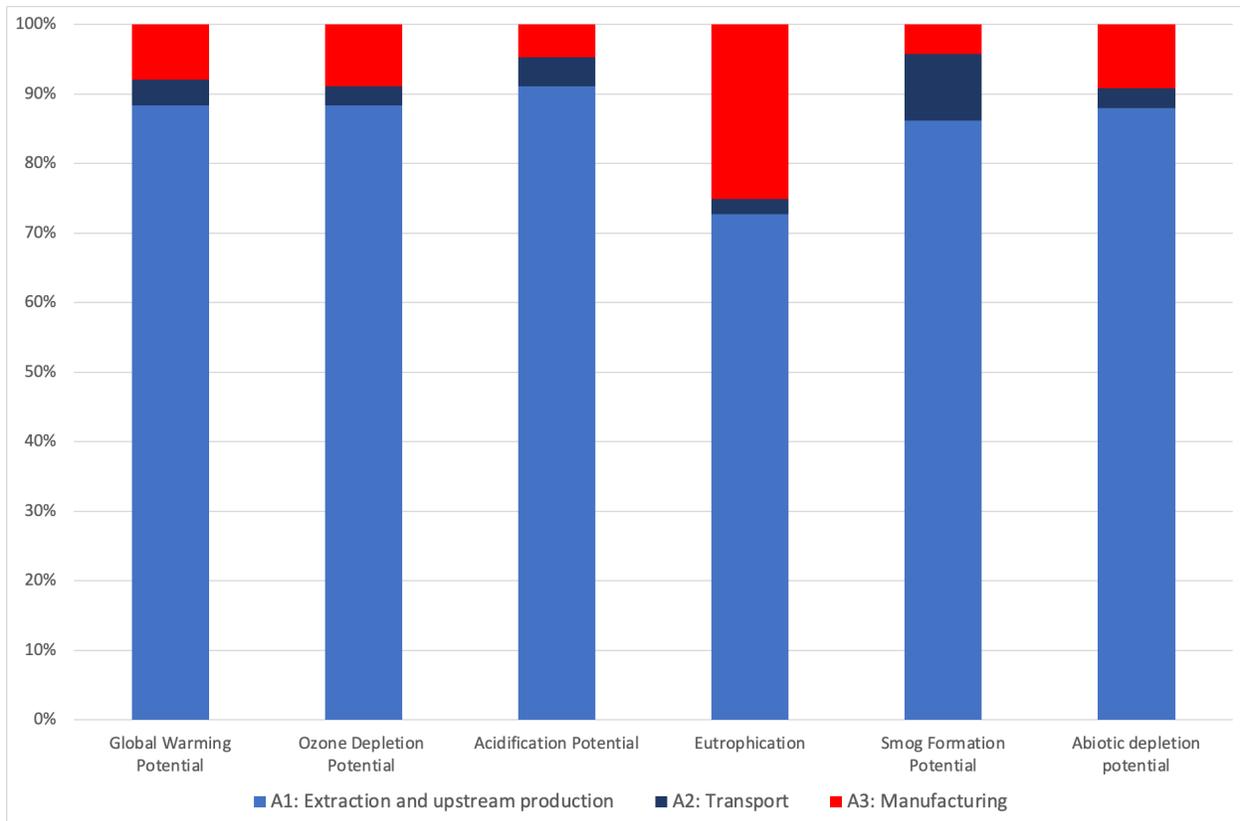


Figure 2. Contribution Analysis: A1-A3 RSC 51

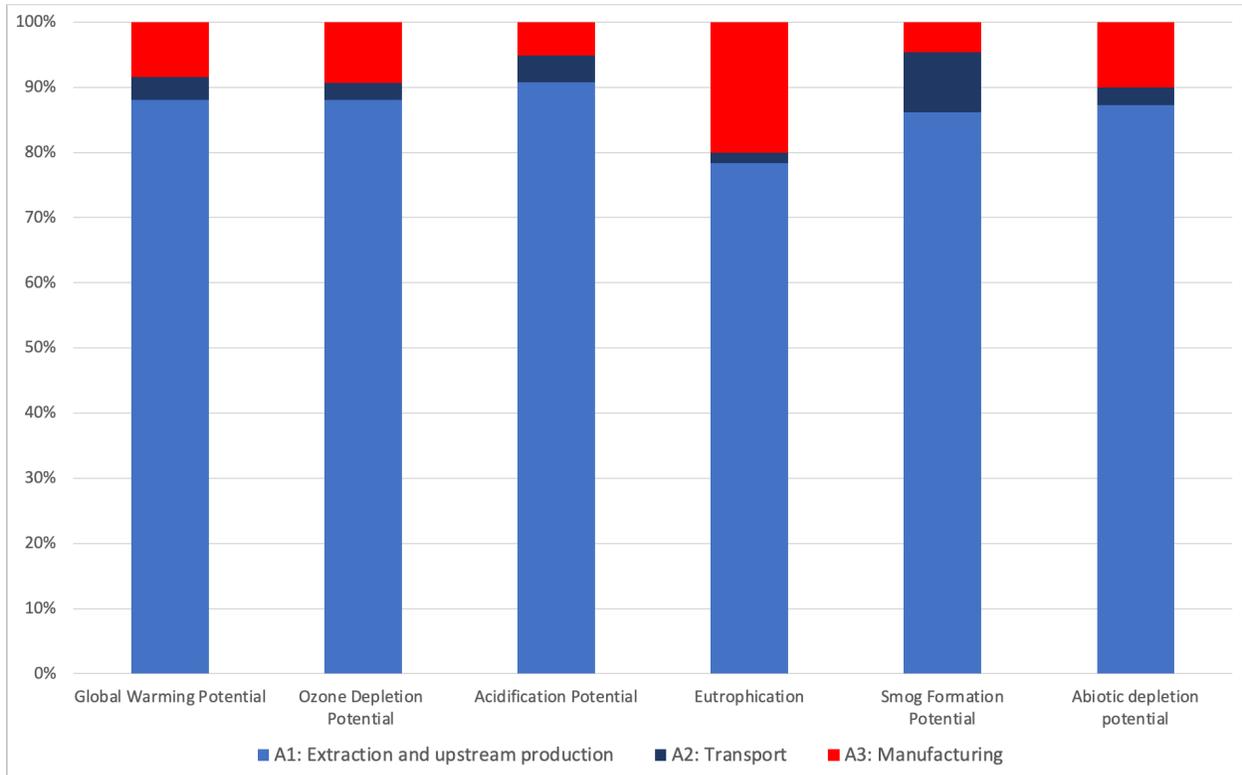

7. Additional Environmental Information

Substances of high concern are chemicals that may have serious effects on human health and the environment. No substances of high concern are identified in the declared product.

8. References

1. WAP Sustainability Consulting (2024) A Cradle-to-Gate Life Cycle Assessment of DC05
2. CML - Department of Industrial Ecology. (2016, September 05). CML-IA Characterisation Factors. Retrieved from <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors>
3. International Organization for Standardization (2017) International Standard ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
4. ISO 14044:2006/AMD 1:2017/ AMD 2:2020 Environmental management - Life cycle assessment - Requirements and guidelines.
5. ISO 14040: 2006 Environmental management - Life cycle assessment - Principles and framework.
6. ISO 14021:1999 Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling)
7. US EPA. (2012). TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts. Version 2.1 - User Guide. Retrieved from <https://nepis.epa.gov/Adobe/PDF/P100HN53.pdf>