

Spray Polyurethane Foam Insulation



# **ENVIRONMENTAL PRODUCT DECLARATION**

---

*Open Cell Spray Foam*



# GENERAL INFORMATION

This cradle-to-grave Environmental Product Declaration covers a spray foam product produced at the Spring, TX and Waukesha, WI facilities. The Life Cycle Assessment (LCA) was prepared in conformity with ISO 21930, ISO 14025, ISO 14040, and ISO 14044 and PCR Part A: Life Cycle Assessment Calculation Rules and Report Requirements (UL 10010, Version 4.0) and Part B: Building Envelope Thermal Insulation EPD Requirements (UL10010-1, Version 3.0). This EPD is intended for business-to-business (B-to-B) audiences.



## Amrize

26 Century Boulevard, Suite 205  
Nashville, Tennessee 37214



## Spring Facility

2400 Spring Stuebner Road West  
Spring, TX 77389

## Waukesha Facility

1245 Chapman Drive  
Waukesha, WI 53186



## Program Operator

ASTM International  
100 Barr Harbor Drive  
West Conshohocken, PA 19428  
610-832-9500  
[www.astm.org](http://www.astm.org)

---

## EPD 1063

September 4, 2025  
Valid for 5 years



## LCA Practitioner

Sphera Solutions, Inc  
130 E Randolph St, #2900  
Chicago, IL 60601  
[www.sphera.com](http://www.sphera.com)

---

**Product Category Rules for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements (UL 10010, Version 4.0) serves as the core PCR; Part B: Building Envelope Thermal Insulation EPD Requirements (UL10010-1, Version 3.0) serves as the sub-category PCR.**

- Sub-category PCR review was conducted by Thomas Gloria, Ph.D. ([t.gloria@industrial-ecology.com](mailto:t.gloria@industrial-ecology.com)) • Industrial Ecology Consultants
- Independent verification of the declaration, according to ISO 21930:2017 and ISO 14025:2006.: ☐ internal ☒ external
- Third party verifier Thomas P. Gloria, Ph.D. ([t.gloria@industrial-ecology.com](mailto:t.gloria@industrial-ecology.com)) • Industrial Ecology Consultants
- For additional explanatory material Manufacturer Representative: Sherrie MacWilliams ([sherrie.macwilliams@amrize.com](mailto:sherrie.macwilliams@amrize.com))  
This LCA EPD was prepared by May Ang LCA and EPD Project Manager • Sphera ([www.sphera.com](http://www.sphera.com))
- EPDs are comparable only if they comply with ISO 21930 (2017), use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.

**Limitations:**

- Environmental declarations from different programs (ISO 14025) may not be comparable.
- Comparison of the environmental performance of products using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under this PCR.
- Full conformance with this PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible". Example of variations: Different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.



PRODUCER

**Enverge** is a leading manufacturer in spray foam insulation (SPF) solutions, dedicated to enhancing the performance and efficiency of modern buildings. We specialize in advanced, multi-functional insulation materials designed to create superior building envelopes. Our products, including both open-cell (like EasySeal™ .5 and SucraSeal®) and closed-cell (like OnePass® and NexSeal™) foams, are engineered to address critical building science needs, such as achieving exceptional thermal performance and creating seamless air barriers.



PRODUCTS

Enverge Open Cell Spray Foam, including products like **Enverge EasySeal™** and **bio-based SucraSeal®**, offers a unique approach to insulation. This lightweight, expansive foam excels at creating a highly effective air barrier, sealing every gap and cavity to prevent air leakage and minimize heat loss. With R-values typically around R-3.7 to R-3.8 per inch, open-cell foam provides excellent thermal performance while also delivering significant sound-dampening benefits, making it ideal for interior walls, floor joists, and attic applications where sound control and a breathable building envelope are desired. It's a versatile solution for enhancing comfort and energy efficiency in a wide range of residential and commercial projects.

FIGURE 1  
Open Cell Spray Foam



The products covered in this EPD have the following Physical and Performance Properties  
(as illustrated in tables 1 - 3 below)

All SPF products must meet numerous performance requirements to comply with building codes. The details of these requirements are described in specific tests listed in consensus standards for material performance and code compliance. Table 1 outlines the properties of Enverge Open Cell Spray Foam, **Enverge EasySeal™** and **bio-based SucraSeal®**.

TABLE 1  
Physical Properties

TYPICAL PROPERTIES			
STANDARD TYPE	Testing Method	EASYSEAL .5	SUCRASEAL
APPARENT DENSITY	ASTM D-1622	0.40 – 0.45 lbs/ft <sup>3</sup> (nominal)	0.40 – 0.45 lbs/ft <sup>3</sup> (nominal)
R-VALUE (AGED)	ASTMC-518	3.7 R/in *calculated from 3.5” sample	3.7 R/in *calculated from 4” sample
COMPRESSIVE STRENGTH	ASTM D-1621	< 5 lbs/in <sup>2</sup>	< 5 lbs/in <sup>2</sup>
OPEN CELL CONTENT	ASTM D-6226	> 90% (vol.)	> 90% (vol.)
AIR PERMEANCE	ASTM E-2178 (Easyseal) ASTM E-283 (Sucraseal)	< 0.002 L/s-m <sup>2</sup> at 3.5”	< 0.002 L/s-m <sup>2</sup>
WATER VAPOR PERMEANCE	ASTM E-96	~23 perm-in	~20 perm-in
FUNGI RESISTANCE	ASTM C-1338	No Growth	Zero Rating
DIMENSIONAL STABILITY, -40°F	ASTM D-2126 (Easyseal) ASTM D-6866 (Sucraseal)	< 5% Change	17%
DIMENSIONAL STABILITY, +200°F	ASTM D-2126	< 5% Change	< 3% Change

TYPICAL PROPERTIES			
STANDARD TYPE	Testing Method	EASYSEAL .5	SUCRASEAL
<b>DIMENSIONAL STABILITY, +158°F &amp; 100%RH</b>	<b>ASTM D-2126</b>	<b>&lt; 5% Change</b>	<b>&lt; 3% Change</b>
<b>IGNITION BARRIER</b>	<b>ICC ES AC377 Appendix X</b>	<b>Pass DC-315 4 mils wft NO BURN THB PLUA 6MILS</b>	<b>&lt; 10% Change</b>
<b>THERMAL BARRIER</b>	<b>NFPA 286</b>	<b>Pass tpr2 20 mils wft Pass dc-315 14 mils wft Flame control 60-60a 14 mils wft</b>	<b>Pass No Coating</b>

These values are typical. However values will vary and should not be considered part of the product specifications. It is imperative that the trained applicator read and understand this technical data sheet and SDS to process the material correctly and understand environmental and equipment limitations.

## TECHNICAL REQUIREMENT

Spray foam insulation products must be installed in compliance with building codes. Nearly all jurisdictions have adopted a version of the following building codes:

- International Code Council (ICC) - International Residential Code (IRC) – For 1 and 2 family dwellings
- International Code Council (ICC) - International Building Code (IBC) – For multifamily dwellings, as well as commercial, institutional and industrial buildings.
- International Code Council (ICC) - International Energy Conservation Code (IECC) – Providing envelope energy efficiency requirements for all buildings.
- American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) Standard 90.1- Energy Standard for Sites and Buildings Except Low-Rise Residential Buildings
- American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) Standard 90.2- Energy-Efficient Design of Low-Rise Residential Buildings

To meet code requirements, open cell products must meet minimum performance requirements, demonstrated by laboratory testing using approved test methods. These tests are performed by third-party laboratories and test data typically submitted to a certification agency for evaluation of the results and the creation of an independent code compliance report for the product. Certification agencies also perform regular quality control testing from random samples taken from the manufacturer's facilities.

There are two guides that are followed by these certification bodies to collect and evaluate data to generate code compliance reports:

- ICC 1100 Standard for Spray-applied Polyurethane Foam Plastic Insulation (2021)
- IAPMO/ANSI ES1000 Building Code Compliance Spray-Applied Polyurethane Foam (2020)

TABLE 2

### Testing Requirements per ICC 1100 and IAPMO ES1000 Standards

TESTING REQUIREMENTS PER ICC 1100 AND IAPMO ES1000 STANDARDS			
Property	Measurement	Test Method	Requirement
<b>Thermal Resistance</b>	R-value at thickness or thermal resistance	ASTM C177-19 Standard Test Method for Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus,  ASTM C518-21 Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus, OR ASTM C1363-24 Standard Test Method for Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus	Report
<b>Air Permeance</b>	Thickness where foam is air impermeable	ASTM E283/E283M-19 Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows,	Report minimum thickness where air impermeable

## TESTING REQUIREMENTS PER ICC 1100 AND IAPMO ES1000 STANDARDS

Property	Measurement	Test Method	Requirement
		Skylights, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen OR ASTM E2178-21a Standard Test Method for Determining Air Leakage Rate and Calculation of Air Permeance of Building Materials	
<b>Water Vapor Permeance</b>	Thickness where foam meets Class I, II or III vapor retarder performance	ASTM E96/E96M-24 Standard Test Methods for Gravimetric Determination of Water Vapor Transmission Rate of Materials (Method A)	Report thickness at vapor retarder class I, II or III.
<b>Density</b>	Mass density of foam	ASTM D1622-20 Standard Test Method for Apparent Density of Rigid Cellular Plastics	Report
<b>Surface Burning Characteristics</b>	Flame Spread Index	ASTM E84-24 Standard Test Method for Surface Burning Characteristics of Building Materials	75 or less
<b>Surface Burning Characteristics</b>	Smoke Developed Index	ASTM E84-24 Standard Test Method for Surface Burning Characteristics of Building Materials	450 or less for insulation, unlimited for roofing
<b>Thermal Barrier Testing</b>	Pass fire test with prescriptive thermal barrier for thickness over 4"	NFPA 286, FM 4880, UL 1040 or UL1715	Pass 15 minute criteria
<b>Alternate Thermal Barrier Assembly</b>	Pass fire test with specific covering or coating	NFPA 286, FM 4880, UL 1040 or UL1715	Pass 15 minute criteria
<b>Ignition Barrier Testing</b>	Pass fire test with or without covering or coating	Various special test methods	See standard for details

## MATERIAL COMPOSITION

The side-A is made from a blend of polymeric methylene diphenyl diisocyanate (MDI). Side-B is a mixture of polyester and polyether polyols, flame retardants, blowing agents, catalysts, and other additives that, when mixed with side-A, creates foam that can be applied for insulation. Due to company confidentiality, the industry average side-B formulation is displayed in Table 3.

While some of the ingredients may be classified as hazardous, per the Resource Conservation and Recovery Act (RCRA), Subtitle C, the product as installed and ultimately disposed of is not classified as a hazardous substance, as hazardous ingredients are rendered chemically inert after installation.

There are no toxic materials or hazardous wastes directly associated with either the manufacturing of these components or the installation of the spray foam systems.

TABLE 3

### Industry Closed cell, HFO Side-B Formulations

CHEMICAL (% COMPOSITION)		INDUSTRY OPEN CELL
<b>Polyol</b>	Polyester	32
	Compatibilizer	13
<b>Fire Retardant</b>	TCPP	25
<b>Blowing Agent</b>	Reactive (H <sub>2</sub> O)	20
<b>Catalyst</b>	Catalyst, amine	9
<b>Surfactant</b>	Silicone	1

APPLICATION

Open cell products are commonly used in residential, light commercial, commercial, institutional, and certain industrial applications. They are commonly applied to the interior side of the building envelope as an insulation and air-sealing material.

FUNCTIONAL UNIT

The functional unit as required by the PCR (Section 3.1 in Part B of the PCR) is:

One square meter (1 m<sup>2</sup>) of installed insulation material with a thickness that gives an average thermal resistance  $R_{SI} = 1 \text{ m}^2\cdot\text{K/W}$  ( $R = 5.68 \text{ hr}\cdot\text{ft}^2\cdot^\circ\text{F/Btu}$ ) and with a building service life of 75 years (packaging included).

As requested by the PCR, the Functional Unit of this LCA is expressed in Table 4.

TABLE 4  
Functional Unit Properties

FUNCTIONAL UNIT (FU)	VALUE	SI UNIT	VALUE	IMPERIAL UNIT
<i>1m<sup>2</sup> of insulation material with a thickness that gives an average thermal resistance <math>R_{SI}=1 \text{ m}^2\text{K/W}</math></i>				
Mass	0.27	kg	0.59	lbs
Thickness to achieve FU	0.04	m	1.53	inch

*\* 0.59 lbs in the mass of insulating foam that fulfills the required RSI value, which excludes the mass of packaging*

# LIFE CYCLE ASSESSMENT

## SYSTEM BOUNDARY

This EPD is a cradle-to-grave EPD, covering A1-C4 stages of the life cycle.

TABLE 5  
Life Cycle Product Stages

PRODUCTION STAGE (MANDATORY)			CONSTRUCTION STAGE		USE STAGE					END-OF-LIFE STAGE			
Extraction and upstream production	Transport to factory	Manufacturing	Transport to site	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	De-construction / Demolition	Transport to waste processing or disposal	Waste processing	Disposal of waste
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	C1	C2	C3	C4
X	X	X	X	X	X	X	X	X	X	X	X	X	X

NOTE: MND = module not declared; X = module included.

## CUT-OFF

Items excluded from system boundary include:

- production, manufacture and construction of manufacturing capital goods and infrastructure;
- production and manufacture of production equipment, delivery vehicles, and laboratory equipment;
- personnel-related activities (travel, furniture, and office supplies); and
- energy and water use related to company management and sales activities that may be located either within the factory site or at another location.

## DATA SOURCES

The LCA model was created using the LCA for Experts (LCA FE) v10.9 software system for life cycle engineering, developed by Sphera (Sphera, 2024). Background life cycle inventory data for raw materials and processes were obtained from the Sphera Managed LCA content (MLC) 2024.2 database. Primary manufacturing data were provided by Amrize.

## DATA QUALITY

A variety of tests and checks were performed by the LCA practitioner throughout the project to ensure high quality of the completed LCA. Checks included an extensive internal review of the project-specific LCA models developed as well as the background data used. A full data quality assessment is documented in the background report.

### Temporal coverage

The data are intended to represent the production during the 2023 calendar year. As such, primary data was provided for 12 consecutive months during the 2023 calendar year. Background data for upstream and downstream processes are obtained from the Sphera MLC databases 2024.2 and are representative of the years 2017-2023.

### Geographical coverage

This background LCA represents Amrize's production in the US. Primary data are representative of the Spring, TX and Waukesha, WI facilities. Regionally specific datasets were used to represent each manufacturing location's energy consumption. Proxy datasets were used as needed for raw material inputs to address lack of data for a specific material or for a specific geographical region. These proxy datasets were chosen for their technological representativeness of the actual materials.

## Technological coverage

Data on material composition were developed using specific side-B formulation. Manufacturing data were collected directly from Amrize. Waste, emissions, and energy use are calculated from reported annual production during the reference year.

## PERIOD UNDER REVIEW

Primary data collected represents production during the 2023 calendar year. This analysis is intended to represent production in 2023.

## ALLOCATION

Primary data collected represent production during the 2023 calendar year. This analysis is intended to represent production in 2023. Multi-output allocation follows the requirements of ISO 14044, section 4.3.4.2 (ISO, 2006a; ISO, 2006b). When allocation becomes necessary during the data collection phase, the allocation rule most suitable for the respective process step was applied. Energy and waste outputs were allocated based mass allocation.

The background MDI dataset used in the LCA study, which was developed by the European diisocyanates and polyols producers' association known as ISOPA is based on a combination of mass and elemental allocation approach (European Diisocyanate and Polyol Producers Association (ISOPA), 2021). This also aligns with the 2022 LCA study conducted by the American Chemistry Council. (American Chemistry Council, 2022) and the SPFA industry EPDs (SPFA, 2024).

The cut-off allocation approach is adopted in the case of any post-consumer and post-industrial recycled content, which is assumed to enter the system burden-free. Only environmental impacts from the point of recovery and forward (e.g., inbound transports, grinding, processing, etc.) are considered.

## MANUFACTURING

The manufacturing process is depicted in the flow diagram presented in Figure 2. The manufacturing process of Enverge Spray Foam includes packaging, manufacturing waste and associated releases to the air, soil, group and surface water.

Spray Foam is applied in the field via a two-part system. The A-side (MDI) is a purchased component that is shipped in tandem with the B-side as a final product. The B-side (includes all or in part: polyols, surfactants, fire retardants, solvents, blowing agents, catalysts, cell openers) is manufactured by raw materials that originate from chemicals stored in onsite bulk storage tanks and packaged chemicals that are transferred from standalone containers to a mixing vessel at the manufacturing location. The B-side manufactured polyol will generate a HFO Formulation for open cell.

Once the B-side raw materials have been combined in the vessel and mixed appropriately, it is packaged into the desired container size. The manual filled containers will be sealed suitably, labelled and secured on pallets with its A-side purchased component. The A-side MDI and B-side manufactured polyol will be transferred to a warehouse area for storage as a complete finished product. Eventually this product will be loaded on trucks for shipment.

The finished products are packaged in unpressurized containers of varying types, most commonly in 55-gallon (208 L) steel drums and are loaded onto pallets. In this study, it is assumed that the empty chemical containers are properly cleaned and taken to a drum recycler.

Disposal of packaging materials is modeled in accordance with the assumptions outlined in Part A of the PCR (UL Environment, 2022). Plastic based packaging is disposed in landfill (68%), incineration (17%), and recycled (15%). Metal based packaging is disposed in landfill (34%), incineration (9%), and recycled (57%). Paper based packaging is disposed in landfill (20%), incineration (5%), and recycled (75%).

After manufacturing (A1-A3) processes, the installation phase covers both transport to site (A4) and Installation (A5). Table 6 and 7 provide more information about modules A4 and A5. The tables report results per functional unit.

Final products are distributed via container truck, which are fueled by diesel. These final products are either directly to customers, or first to warehouse, prior to being sent to customers. Table 7 details distribution assumptions for finished product. After being transported to the site, the packs are unloaded from the truck to the rooftop using a diesel crane. Then, the boards are installed manually through a mechanical attachment procedure involving fasteners and fastening plates and necessary equipment to support the procedure. Finally, the waste scrap from installation is collected and transported to a local landfill for disposal.

For SPF with physical blowing agents, this study assumes 10% of the installed blowing agent is released to surrounding air during the installation phase. Discarded foam from installation also experiences blowing agent release while in landfill. Disposal of packaging materials is modeled in accordance with the assumptions outlined in Part A of the PCR (UL Environment, 2022). All ancillary installation materials are assumed to be sent to landfill. For open cell spray foam, the blowing agent is water and results in no environmental impact.

FIGURE 2  
Process Flow Diagram of Spray Foam Manufacturing

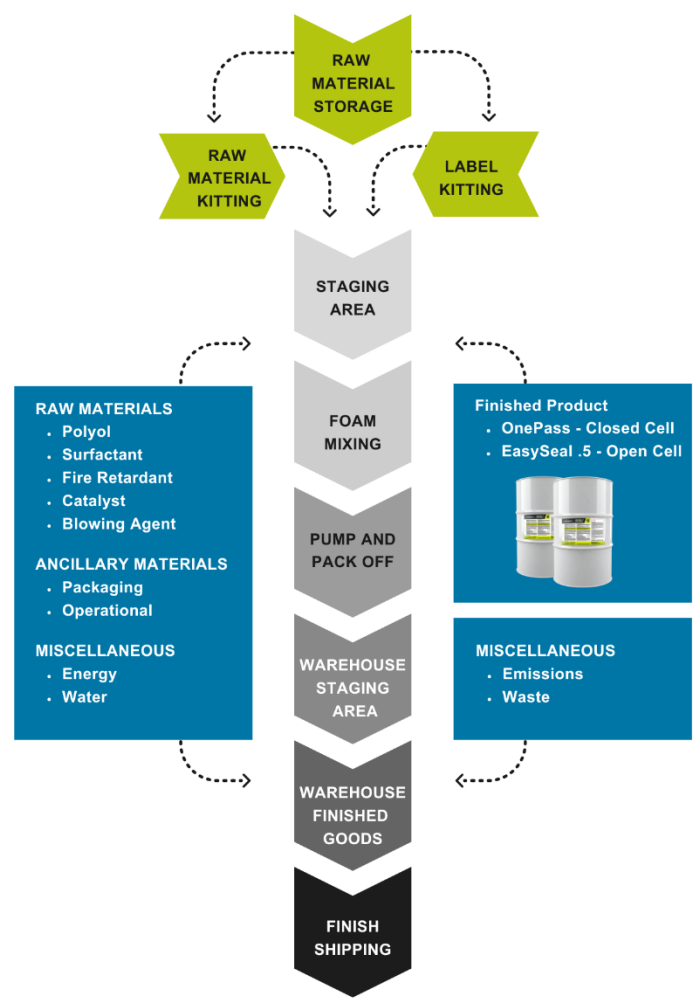


TABLE 6  
Transport to the building site (A4) per Functional Unit

Name	Value		Unit
Fuel type	Diesel		
Liters of fuel	0.0005	0.0007	/100km
Vehicle type	Truck-heavy/bulk	Truck-TL/dry van	
Transport distance	1194	174	km
Capacity utilization (including empty runs, mass based)	100	100	%
Gross density of products transported	6.89		Kg/m <sup>3</sup>

TABLE 7

## Installation into the building (A5) per Functional Unit

Name	Value	Unit
Ancillary materials	0.0085	kg
Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer)	-	m <sup>3</sup>
Other resources	N/A	kg
Electricity consumption	0.017	kWh
Other energy carriers	1.06	MJ
Product loss per functional unit	0.01	kg
Waste materials at the construction site before waste processing, generated by product installation	0.0013	kg
Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal)	-	kg
Biogenic carbon contained in packaging	0.0006	kg CO <sub>2</sub>
Direct emissions to ambient air, soil and water	-	kg
VOC content	-	µg/m <sup>3</sup>

## B1 – B5 USE STAGE

As this study only looks at the life cycle of spray foam insulation, and not the building, the use phase only contains the emissions of any chemicals off-gassed from the foam. This study assumes 24% of the original chemical blowing agent is off-gassed over a 75-year lifetime (Honeywell International). However for open cell spray foam, the blowing agent is water and results to no environmental impact reported in its use phase (module B1).

Table 8 provides information about the product's reference service life per functional unit.

TABLE 8

## Reference Service Life

Name	Value	Unit
Direct emissions to ambient air, soil and water	-	kg

## C1 – C4 END-OF-LIFE STAGE

When the building is decommissioned, it is assumed that only manual labor is involved to remove the foam. Waste is assumed to be transported 30 miles (48 km) to the disposal site. The spray foam is assumed to be landfilled at end-of-life, as is typical for construction and demolition waste in the US. This study assumes 16% of the original physical blowing agent is emitted at this stage in the life cycle. It is further assumed the spray foam is inert in the landfill and 50% of the blowing agent remains in the product after disposal. (Kjeldsen & Jensen, 2001). Table 9 provides more information about modules C1 to C4 (end of life). The table reports results per functional unit.

TABLE 9

## End of life (C1-C4)

Name		Value	Unit
Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation)		Landfill	
Collection process (specified by type)	Collected with mixed construction waste	0.27	kg
Recovery (specified by type)	Landfill	0.27	kg
Disposal (specified by type)	Product or material for final deposition	0.27	kg
Removals of biogenic carbon (excluding packaging)		-	kg CO <sub>2</sub>

# LIFE CYCLE ASSESSMENT RESULTS

This declaration is cradle-to-grave and all information modules are declared. As discussed in the Life Cycle Assessment Scope and Boundaries Section, Modules B2, B3, B4, B5, B6, B7, C1 and C3 do not contribute to impacts and are declared as zero. Optional Module D – Benefits and Loads Beyond the System Boundary – is not included in this LCA study. Only relevant stages are presented with results, to make it easier to follow.

TABLE 10

## Open Cell Spray Foam, per Functional Unit

IMPACT ASSESSMENT UNIT	PRODUCTION (A1-A3)	TRANSPORT (A4)	INSTALLATION (A5)	USE (B1)	EOL (C1-C4)	TOTAL
Global warming potential (GWP) <sup>1</sup> (kg CO <sub>2</sub> eq)						
	1.03E+00	2.38E-02	1.14E-01	0.00E+00	6.23E-03	1.18E+00
Depletion potential of the stratospheric ozone layer (ODP) ( kg CFC-11 eq)						
	2.49E-14	6.05E-17	1.64E-12	0.00E+00	2.79E-16	1.66E-12
Eutrophication potential (EP) ( kg N eq)						
	1.52E-04	9.53E-06	4.32E-05	0.00E+00	1.46E-06	2.07E-04
Acidification potential of soil and water sources (AP) ( kg SO <sub>2</sub> eq)						
	1.44E-03	1.06E-04	4.95E-04	0.00E+00	3.19E-05	2.08E-03
Formation potential of tropospheric ozone (POCP) ( kg O <sub>3</sub> eq)						
	2.71E-02	2.44E-03	1.63E-02	0.00E+00	5.80E-04	4.65E-02
Resource Use						
Abiotic depletion potential for fossil resources (ADP <sub>fossil</sub> ) (MJ, NCV)						
	2.11E+01	3.12E-01	1.73E+00	0.00E+00	9.10E-02	2.32E+01
Renewable primary energy resources as energy (fuel), (RPRE <sup>2</sup> )* (MJ, NCV)						
	1.18E+00	1.36E-02	1.07E-01	0.00E+00	1.11E-02	1.31E+00
Renewable primary resources as material, (RPRM <sup>2</sup> )* (MJ, NCV)						
	6.16E-02	0.00E+00	1.28E-03	0.00E+00	0.00E+00	6.29E-02
Non-renewable primary resources as energy (fuel), (NRPRE <sup>2</sup> )* (MJ, NCV)						
	1.71E+01	3.14E-01	1.58E+00	0.00E+00	9.37E-02	1.91E+01
Non-renewable primary resources as material, (NRPRM <sup>2</sup> )* (MJ, NCV)						
	4.83E+00	0.00E+00	2.13E-01	0.00E+00	0.00E+00	5.04E+00
Consumption of fresh water, (FW <sup>2</sup> ) (m3)						
	1.36E-02	4.59E-05	3.45E-04	0.00E+00	1.22E-05	1.40E-02
Secondary Material, Fuel and Recovered Energy						
Secondary Materials, (SM <sup>2</sup> ) * (kg)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

<sup>1</sup> GWP 100; 100-year time horizon GWP factors are provided by the IPCC 2013 Fifth Assessment Report (AR5).  
CO<sub>2</sub> from biogenic secondary fuels used in kiln are climate-neutral (CO<sub>2</sub> sink = CO<sub>2</sub> emissions), ISO 21930, 7.2.7.

<sup>2</sup> Calculated per ACLCA ISO 21930 Guidance.


Renewable secondary fuels, (RSF <sup>2</sup> )* (MJ, NCV)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable secondary fuels (NRSF <sup>2</sup> )* (MJ, NCV)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy, (RE <sup>2</sup> ) *(MJ, NCV)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Waste & Output Flows						
Hazardous waste disposed, (HW <sup>2</sup> ) * (kg)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-hazardous waste disposed, (NHWD <sup>2</sup> ) * (kg)						
	2.96E-03	0.00E+00	3.01E-02	0.00E+00	2.69E-01	3.02E-01
High-level radioactive waste, (HLRW <sup>2</sup> ) * (kg)						
	3.55E-07	9.65E-10	2.75E-08	0.00E+00	1.06E-09	3.84E-07
Intermediate and low-level radioactive waste, (ILLRW <sup>2</sup> )* (kg)						
	3.08E-04	8.14E-07	2.31E-05	0.00E+00	9.49E-07	3.33E-04
Components for reuse, (CRU <sup>2</sup> ) * (kg)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling, (MR <sup>2</sup> ) * (kg)						
	9.03E-04	0.00E+00	3.10E-02	0.00E+00	0.00E+00	3.19E-02
Materials for energy recovery, (MER <sup>2</sup> ) * (kg)						
	6.52E-09	0.00E+00	4.93E-03	0.00E+00	0.00E+00	4.93E-03
Recovered energy exported from the product system, (EE <sup>2</sup> ) * (MJ, NCV)						
	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Carbon Emissions and Removal						
Biogenic Carbon Removal from Product, (BCRP) * (kg CO <sub>2</sub> )						
	4.12E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.12E-03
Biogenic Carbon Emission from Product, (BCEP) * (kg CO <sub>2</sub> )						
	0.00E+00	0.00E+00	4.12E-03	0.00E+00	0.00E+00	4.12E-03
Biogenic Carbon Removal from Packaging, (BCRK) * (kg CO <sub>2</sub> )						
	5.62E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.62E-04
Biogenic Carbon Emission from Packaging, (BCEK) * (kg CO <sub>2</sub> )						
	0.00E+00	0.00E+00	5.62E-04	0.00E+00	0.00E+00	5.62E-04

LCA INTERPRETATION

Figure 3 presents the results for the environmental performance of 1 m<sup>2</sup> of installed product with a thickness that provides a thermal resistance of 1 m<sup>2</sup>·K/W (5.68 hr·ft<sup>2</sup>·°F/Btu).

It is clear from the figure that raw materials (A1) have the largest contribution on the environmental footprint, followed by installation (A5) and manufacturing (A3). Transportation modules (A2, A4, and C2) have a cumulative contribution of 0% to 5% across the impact categories. As open cell SPF uses a reactive blowing agent (water), use (B1) has no impact reported, and end-of-life (C4) have a negligible impact (< 2%) overall.

FIGURE 3  
Contribution Analysis by Module of Open Cell Product per Functional Unit

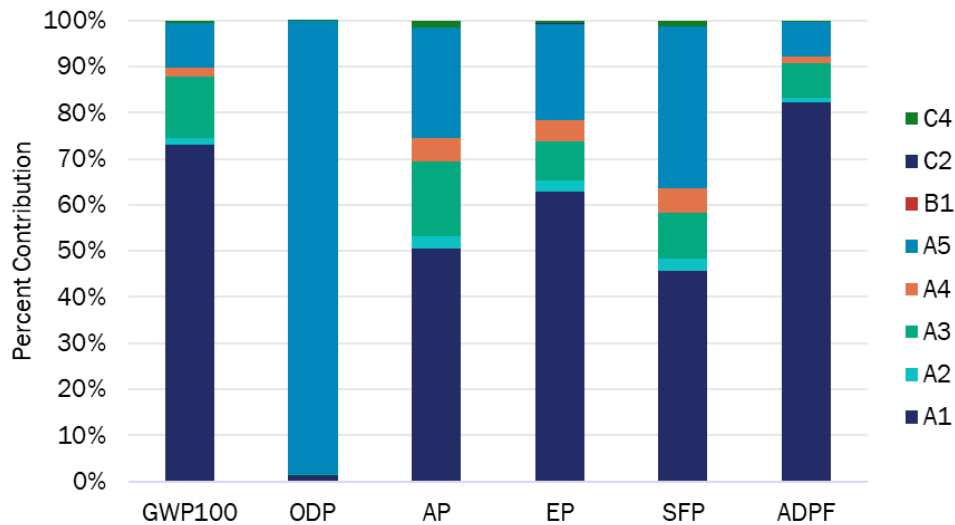

## ADDITIONAL ENVIRONMENTAL INFORMATION



# REFERENCES

- Bare, J. (2012). Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) - Software Name and Version Number: TRACI version 2.1 - User's Manual. Washington, D.C.: U.S. EPA.
- CML. (2001). CML's Impact Assessment Methods and Characterisation Factors. Leiden University, Institute of Environmental Science.
- EPA. (2012). Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) - User's Manual. Washington, D.C.: US EPA.
- European Diisocyanate and Polyol Producers Association (ISOPA). (2021). Eco-profile of toluene diisocyanate (TDI) and methylene diphenyl diisocyanate (MDI).
- Honeywell International. (n.d.). Predictive Model for Polyurethane Blowing Agent Emissions into a House. Buffalo.
- IPCC. (2023). Climate Change 2023: Synthesis Report. Geneva, Switzerland: IPCC.
- ISO. (2006a). ISO 14040: Environmental management – Life cycle assessment – Principles and framework. Geneva: International Organization for Standardization.
- ISO. (2006b). ISO 14044: Environmental management – Life cycle assessment – Requirements and guidelines. Geneva: International Organization for Standardization.
- ISO. (2017). ISO 21930: Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services. Geneva: International Organization for Standardization.
- Kjeldsen, P., & Jensen, M. (2001). Release of CFC-11 from Disposal of Polyurethane Foam Waste. ENVIRONMENTAL SCIENCE & TECHNOLOGY, 3055-3063.
- Occupational Safety and Health Standards. (n.d.). US Code of Federal Regulations, Title 29, Subtitle B, Chapter XVII, Part 1910. Retrieved from <https://www.ecfr.gov/current/title-29/subtitle-B/chapter-XVII/part-1910>
- Safety and Health Regulations for Construction. (n.d.). US Code of Federal Regulations, Title 29, Subtitle B, Chapter XVII, Part 1926. Retrieved from <https://www.ecfr.gov/current/title-29/subtitle-B/chapter-XVII/part-1926>
- SPFA. (2018). Environmental Product Declaration: Spray Polyurethane Foam Insulation. ASTM.
- Sphera. (2025). Sphera LCA Database Documentation. Retrieved from Sphera Solutions, Inc.: <https://sphera.com/product-sustainability-gabi-data-search/>
- Sustainable Solutions Corporation. (2020). SPF Residential Energy Modeling Analysis.
- UL Environment. (2022). Product Category Rules for Building-Related Products and Services - Part A: Life Cycle Assessment Calculation Rules and Report Requirements, UL 10010 (v4.0).
- UL Environment. (2024). PCR Part B: Building Envelope Thermal Insulation EPD Requirements UL 10010-1 (v3.0).
- United States EPA. (2024, November). US Code of Federal Regulations, Title 40. Retrieved from <https://www.ecfr.gov/current/title-40>
- United States EPA. (2024, November). Waste, Chemical, and Cleanup Enforcement. Retrieved from <https://www.epa.gov/enforcement/waste-chemical-and-cleanup-enforcement>
- US Code of Federal Regulations. (November, 2024). Federal Motor Carrier Safety Regulations. Retrieved from Title 49, Subtitle B, Chapter III, Part 397 : <https://www.ecfr.gov/current/title-49/subtitle-B/chapter-III/subchapter-B/part-397>
- US Department of Labour. (2024, November). Law and Regulations. Retrieved from <https://www.osha.gov/laws-regs>
- US Department of Labour. (2024, November). State Plans. Retrieved from <https://www.osha.gov/stateplans>

